
R3M

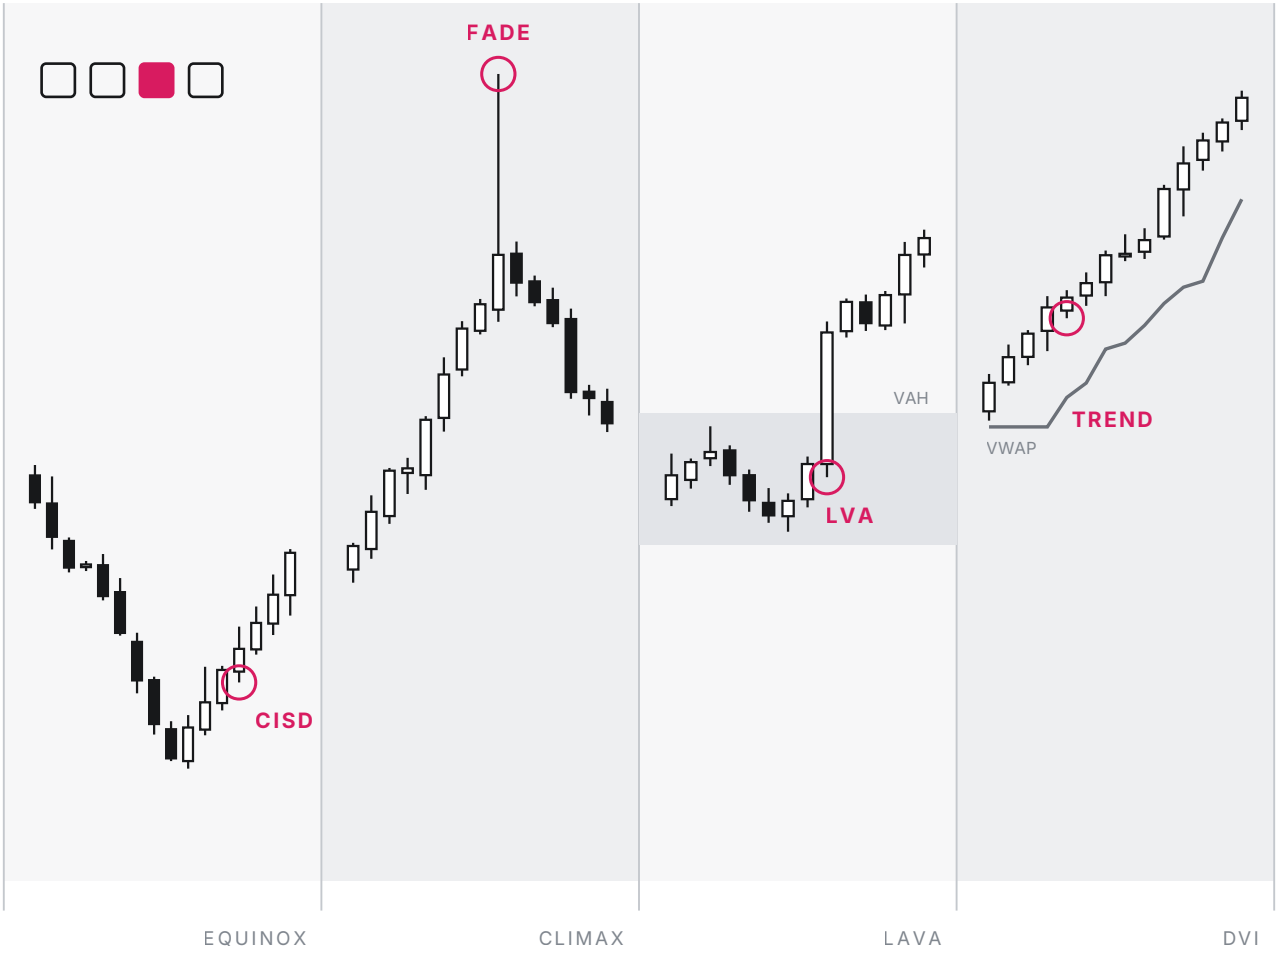


GUIDE

# r3m·

One Body · Five Engines · One Session

| EDITION | PLATFORM | SCRIPTS |
| --- | --- | --- |
| November 2026 | TradingView · Pine Script v6 | r3m· · r3m·screener· |

R3M· GUIDE

# Contents


01 **What r3m does** 3
One body, five engines, one window

02 **Quick start** 5
Engine, session, done

03 **The session** 6
One window, only its bars

04 **The map** 8
Levels, VWAP, liquidity and context

05 🌓 **The equinox engine** 11
The turn in the day bias' direction

06 ⚡ **The climax engine** 13
The exhaustion, faded

07 🌋 **The lava engine** 14
The first acceptance of the new price

08 📈 **The dvi engine** 15
The session VWAP trend

09 🧊 **The ice engine** 16
Several gauges, one way

10 🤖 **The Autopilot** 17
One engine per session, picked as it happens

11 **The trade** 18
One entry path for all five

12 **Auction Failed** 20
Where the others fail is the chance

13 **On the chart** 21
Marks, stubs, the readout and the boards

14 **Setting up alerts** 23
One alert, short messages

15 **The screener · r3m·screener·** 25
Twelve symbols, one engine, one alert

16 **The settings** 27
Every group, what it is for


**IMPORTANT** **This guide explains a tool, not a trading strategy**

r3m (R3M) measures and names what the market has already done. It does not predict what it will do. It shows where its engines see a trade and how that trade ended — what you do with it is yours. Nothing in this guide is financial advice, and nothing in it is a promise of results.

SECTION 1

# 01 What r3m does

r3m puts five R3M engines into one script. It reads one session window — the symbol's own cash market, a killzone or a window you set — and inside that window one engine looks for the trade. Everything else is one body for all five: the levels, the targets, the exit, the failure trade, the readout and the alerts.

→ The one core idea 3

→ What you need 4

| Engine | What it waits for | The day it likes |
|---|---|---|
| 🌓 **equinox** | A turn in the direction of the day bias, after price first ran the other way and took a gap or a swing | A day with a direction that it keeps |
| ⚡ **climax** | The exhaustion bar at the session's extreme, faded | A move that runs out of breath at the edge |
| 🌋 **lava** | Price accepted outside the morning's value area | A calm, balanced market that suddenly finds a new price |
| 📈 **dvi** | A close well beyond the session VWAP: the side that leads the session | A cash open that sets a trend and holds it |
| 🧊 **ice** | Several momentum readings agreeing at once, a lower timeframe confirming | A clean push that everyone can see |

You pick the engine in `Engine`, the first input, or let `🤖 Autopilot` pick one for each session (section 10). To watch two engines at once, put r3m on the chart twice.

## The one core idea

> **NOTE** **Same body, different head. Every trade is comparable.**
>
> The five engines share one frame: the same session window, the same way of setting targets, the same exit, the same failure trade, the same alerts. Only the trigger and its natural stop differ. So a lava acceptance and an equinox CISD are drawn, targeted, closed and reported the same way — and you can compare them fairly, day by day and market by market.

If you know the standalone R3M scripts equinox, climax, lava, dvi and ice: they live on inside r3m as its engines. Everything new happens here.

## What you need

- An intraday chart. The **5-minute chart** is r3m's home; other minute charts work too. The 210-minute quarters need a timeframe that divides into 210 minutes, and the first presented FVG is always read on 1-minute data.
- Volume helps the VWAP and lava's value area. Without real volume, switch `Weight By Volume` off.
- For a whole watchlist on one alert: r3m·screener· (section 15).

SECTION 2

# 02 Quick start

Three choices and r3m runs. Everything else can stay as it is.

→ Step 1 · Pick the engine 5
→ Step 2 · Check the session 5
→ Step 3 · Let it run 5
→ What you see 5

## Step 1 · Pick the engine

Add r3m· to a 5-minute chart and choose the `Engine`. The default is 🌋 lava. Each engine reads only its own settings group; the groups of the others are greyed out.

## Step 2 · Check the session

`Session` is `Auto` by default: the symbol's home market, decided by what the symbol is. `Hours` is `Cash` by default — the cash market. The readout at the bottom right names what was picked, for example `r3m· lava · London cash 08:00–16:30 London`. Everything outside the window is skipped, as if the chart had no bars there.

## Step 3 · Let it run

Set up one alert (section 14). Entries, results and failure trades arrive as short messages in your Telegram group or in TradingView's alert log.

## What you see

The previous window's levels from the open, the liquidity tags, the Trend Trail and its bands, with lava the frozen value area, a ϟ at every climax (section 4). A trade gets a mark at the entry, a short dotted stop line and small target stubs; a failure trade a `◇` (section 13). Bottom right the readout, top right the Engine Consensus Board, middle right the Timeframe Board.

SECTION 3

# 03 The session

r3m reads one window a day. Inside it every number is built from the window's own bars: the VWAP, the volatility, the previous window's levels, the day's range, the backdrop. Outside it the script waits.

→ Auto 6
→ Hours · Cash, Killzone, Custom 6
→ What is built from the window 7

## Auto

`Session` · `Auto` picks the symbol's home market by what it is:

| Symbol | Session |
|---|---|
| Stocks, cash indices, funds, futures | By their exchange: Europe → London · Asia / Australia → Asia · America → New York |
| DAX and other European index CFDs, UK100 | London |
| JPN225, HK50, AUS200, CN50 | Asia |
| Gold, silver, oil | London |
| FX | London |
| US index CFDs, stock CFDs, crypto | New York |

`Asia`, `London` or `New York` set it by hand. The alert header carries the session that was picked.

## Hours · Cash, Killzone, Custom

| Hours | Asia | London | New York |
|---|---|---|---|
| **Cash** (default) | Tokyo Stock Exchange, 09:00–15:30 Tokyo | London cash, 08:00–16:30 London (Xetra 09:00–17:30 Berlin) | NYSE / Nasdaq, 09:30–16:00 New York |
| **Killzone** | ICT's Asia killzone | ICT's London killzone | ICT's New York killzone |

The killzones are read on the New York clock, as ICT defines them. `Custom` takes your own window in ↳ `Custom` with its ↳ `Timezone`; it may run over midnight. In a killzone the previous window is called `PS` (`PSH`, `PSL`) instead of `PD`.

## What is built from the window

- **The session VWAP** and its bands, anchored at the window's open.
- **The volatility** of the window's own bars, so a quiet night does not shrink it.
- **The previous window**: its high and low, its candle — the **flow**, `BULL` when it closed above its open — its quarter levels and the projections beyond its high or low.
- **The day's range** against an average day: how much of a normal day is already used.
- **The previous week**: its high and low, a target until taken.
- **The backdrop**: the shape of the last sessions, read as `balanced` (a range), `drifting` (a slow slope) or `trending` (a staircase), with `up` or `down`. It describes the recent sessions, not today: a `trending up` backdrop and a bearish day can stand side by side, and that day runs against the drift. The number beside it says how clear the slope is: the higher, the steeper.

`Keep Previous Sessions' Levels` keeps yesterday's lines on the chart; off, only today's are drawn.

SECTION 4

# 04 The map

The map is what r3m draws whether a trade comes or not. It is the same for every engine.

→ The levels 8
→ VWAP and bands 8
→ Trend Trail and Volatility Bands 8
→ Timeframe Board 9
→ Liquidity runs 9
→ The first presented FVG 9
→ Gaps and taps 9
→ ◇ 210m quarters and ◑ the handover 10
→ ϟ climax marks 10
→ Mini panels 10

## The levels

At the open r3m draws the previous window's levels and carries them to the last bar until the next open: the high and low solid, the quarter levels solid and thinner, the projections dotted. With lava the frozen value area joins them: `VAH`, `VAL`, a thicker `POC`, the high volume nodes `HVN` solid and the low volume nodes `LVN` dashed.

## VWAP and bands

`VWAP & Bands` draws the session VWAP, dotted, with its band pairs, only inside the window. With dvi its change lines can join them (↳ `dvi Change Lines`). The VWAP is the session's average price, weighted by volume: above it buyers have paid up, below it sellers have.

## Trend Trail and Volatility Bands


`Trend Trail` draws a line under price in an up-trend and over it in a down-trend, with a faint fill to the candle bodies. Picture a rope a climber clips in as he goes: it follows him up, never down, and when he falls through it, it hangs on the other side.

- ↳ `Sensitivity` sets how closely the rope hangs: higher hangs tighter and flips sooner, lower gives price more room.
- ↳ `Trading Style` · `Scalper` · `Day Trader` · `Swing Trader` sets its pace, from short to long.
- ↳ `Auto Sensitivity` lets the script choose the sensitivity from how price has been moving lately.
- ↳ `Bull · Bear` are its own two colours, apart from `Colors`.

`Volatility Bands` draw a calm envelope around price with faint fills, in their own ↳ `Color`. Wide bands mean a lively market, narrow bands a squeeze: the market is coiling. ↳ `Draw Only In The Session` draws the trail and the bands only on the session's bars; off, they are drawn on every bar.

## Timeframe Board

`Timeframe Board` (middle right) shows the Trend Trail's side on a row of timeframes, from a few minutes up to the week:

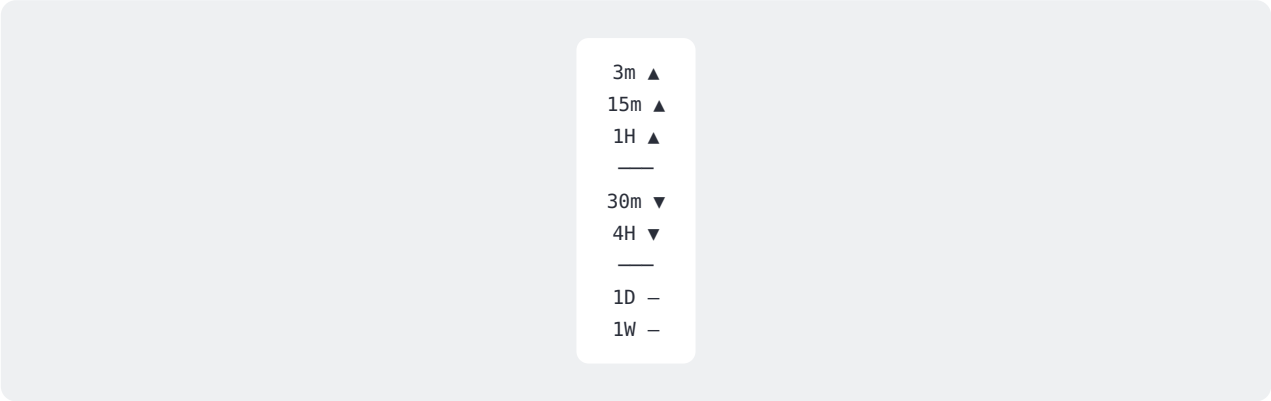


The timeframes pointing up come first, then those pointing down, then the undecided ones, each group from the shortest timeframe up. A thin line separates the groups, drawn in the colour of the majority. One look says whether the bigger picture leans with your chart.

## Liquidity runs

A run of swing highs stepping down — or swing lows stepping up — leaves a pool of stops behind it, and nothing in between to stop price going there: a low-resistance run, `+LRLR` above or `-LRLR` below. Equal highs and lows are `EQH` / `EQL`, the classic double top and bottom where stops cluster.

A run turns `+HRLR` / `-HRLR`, dashed and paler, once its liquidity sits behind an open fair value gap of the opposite side (`HRLR · Runs Behind An Open FVG`, and with ↳ `HTF FVG In Path Breaks It Too` a higher-timeframe gap as well): the liquidity is still there, but defended. Tags merge into rows; hover one for its swings, when it formed (🧲 `Formed …`) and when it was run (✂️ `Run …`).

## The first presented FVG

The first 1-minute fair value gap after the window's open, drawn dotted with its middle (C.E.) and a faint fill, tagged `1st +FVG` or `1st -FVG`. Once price closes through its far side it becomes an inversion, `iFVG`. Its tooltip opens with 🔔 `·`. It is the open's first footprint: who showed their hand first.

## Gaps and taps

`Gaps & Taps` reads the higher-timeframe fair value gaps and the opening gaps — `NDOG` (the new day's opening gap) and `NWOG` (the new week's). ↳ `Draw Boxes & Tags` draws them as boxes. ↳ `☐ First Tap Marks` puts a small ☐ where price first comes back into a gap: below the bar when price came up into it, above when it came down. The tooltip names the gap and how price entered it: 👆 `· First Tap ·` 🔴 `1H +FVG ↓ 24,288.0`. ↳ `First Taps · Session` counts the session's first taps, `24h · 7h Blocks` marks them around the clock.

## ◇ 210m quarters and ◑ the handover

Drawn for context. A reversal signature on the 210-minute candles draws its own dashed levels and a ◇; a later close through them removes them. `◑ NY` marks where the New York clock's reading of the day takes over, `◑ LON` where it hands back, with both clocks' day bias in the tooltip. The trades do not read these marks — they are there to look at.

## ϟ climax marks

Every climax of the session gets a ϟ at its extreme: an unusually wide bar at a new session high or low that closes well back from it. `Climax Timeframe` decides where it is read: `Chart`, `Auto`, `MTF` (the matching higher timeframe and the step below it) or a fixed timeframe. The tooltip names the level it printed at (`at the PDH`, `at the VAL` …). climax trades it; for the others it is context. Outside the session the ϟ is drawn too, at a new high or low of the day (`outside the session, drawn only`): a look-here mark that nobody trades.

## Mini panels

`Mini Panels · 1H` / `210m` / `7H` draw small candle panels to the right of price, built from the chart's own bars: the last hours, the 210-minute candles and the London clock's blocks of the day. ↳ `Climax ϟ` places every ϟ of the chart in the panel candle it printed in, ↳ the quarter lines add the previous candle's levels, ↳ `Distance (Bars)` moves the panels, ↳ `Panel Candles` sets their colours.

SECTION 5

# 05 The equinox engine

equinox takes one side a day — the day bias — and waits for price to turn that way after it first ran the other.

→ The core idea 11
→ What it waits for 11
→ On the chart 11
→ Good days, hard days 12

## The core idea

> **NOTE** **Manipulation before expansion**
>
> ICT calls it the Power of Three: accumulation, manipulation, distribution. Before the market runs one way, it first takes the liquidity on the other side — the stops resting there are the fuel. That grab is the reversed leg: price runs against the day bias, taps a gap or sweeps a swing, and then turns back. The equinox engine trades the expansion that follows, and only in the day bias' direction, because the bias names the side the day is set to deliver.

## What it waits for

- **The day bias.** `Day Bias` · `Equinox Day Bias` is equinox's own read of the day; the readout and the ϟ tooltips show it with its state, for example `BULL A+` when nothing has challenged it, or `reversal` when the night turned it. `Previous Session Candle` takes the previous window's candle instead. No bias, no entries.
- **The event.** In the reversed leg, a tap of an open fair value gap ( `Event · FVG` ) or a sweep of a swing ( `LQ` ).
- **The trigger.** A **CISD** — a change in the state of delivery, a close back through the open of the run in progress — or one of two candle signatures: **RC**, a candle that sweeps a swing and closes back, and **EC**, a candle that engulfs the one before. `Strong Close` asks the trigger to close near its end.

The stop sits at the protected swing — the extreme the trade must not lose — or, with `Stop` · `Trigger Candle (Tight)` , at the trigger candle. `Second Shot` decides whether a second trade is allowed in the same session: `After A Winner` , `Always` or `Off` .

## On the chart

`▲` over `EQX` below the bar for a long, `EQX` over `▼` above it for a short. A short thick line marks the CISD level.

## Good days, hard days

Strong when the day has a direction and keeps it. Hard when the day chops sideways: then the reversed legs never end and the triggers come and go.

SECTION 6

# 06 ⚡ The climax engine

climax fades the bar that ran out of steam at a new session extreme.

→ The core idea 13
→ What it waits for 13
→ On the chart 13
→ Good days, hard days 13

## The core idea

> **NOTE** **Exhaustion before reversal**
>
> Linda Raschke's observation: a candle far wider than usual, printing a new extreme of the day and still closing well back from it, has shown its hand. The market reached the extreme and turned it down in the same candle — the late buyers (or sellers) are trapped at the top (or bottom). The climax engine trades the return from that candle's close, with its stop beyond the extreme the market just rejected.

## What it waits for

A climax (the ϟ of section 4) at a new session high is faded short at its close, one at a new session low long. `Climaxes` picks which ones count: `Every Climax`, `Session Extreme Only` (the climaxes that are only a session extreme) or `At A Level Only` (the climaxes that printed at a level of the previous window). It aims at levels close by: climax is a quick trade back into the range.

`Exit · Ladder` uses the shared targets; `½ Rung 1 + Runner · 2h` takes a part at the nearest level and lets the rest run, and closes a fade that goes nowhere.

## On the chart

`▲` over `CLX` below the bar for a long, `CLX` over `▼` above it for a short. A newer climax while a trade is still live is drawn dim.

## Good days, hard days

Strong when a move runs out of breath at the edge of the day, above all on indices and after a stretch that ran too far. Hard on a real trend day: the trend runs over one fade after another.

SECTION 7

# 07 🌋 The lava engine

lava freezes the value area of the hours before the open and trades the first time price accepts a price outside it.

→ The core idea 14
→ What it waits for 14
→ On the chart 14
→ Good days, hard days 14

## The core idea

> **NOTE** **Value is where the market agreed. Acceptance is where it agrees next.**
>
> In the 1980s Peter Steidlmayer, a trader on the floor of the Chicago Board of Trade, drew each half hour's prices as letters side by side and saw the market build a bell curve every day: the Market Profile. Auction market theory grew out of it and reads a session as a search for a fair price. The value area — where most of the volume traded — is where buyers and sellers agreed. As long as price rotates inside it, nothing has been decided. When price closes outside it and *stays* there, the market has accepted a new price: the old agreement is over, and price tends to travel to the next place where it will find business (a node, a POC, a prior high or low) or resting orders (a run of highs or lows). The lava engine trades that journey — and only from the first, cleanest acceptance of the session. When the new price is rejected after all, the auction has failed, and the journey runs the other way.

## What it waits for

At the open lava freezes the value area of the hours before it: `POC`, `VAH`, `VAL` and the high and low volume nodes. Then it waits for price to leave that area and stay out — not one poke, but a real acceptance. The readout shows it live: `waiting · ▲ accepting` while price is out but not yet accepted, `done for the session` once the acceptance has come. From there price tends to travel to the next node or level.

## On the chart

`△` over `LVA` below the bar for a long, `LVA` over `▽` above it for a short. The value area's lines stay frozen for the session.

## Good days, hard days

Strong when the market is balanced and then finds a new price: the range of the last days is the fuel. Hard when the market is trending hard: there the value area is left behind every day. If the first acceptance fails, the Auction Failed takes over (section 12).

SECTION 8

# 08 📈 The dvi engine

dvi follows the session: a close well beyond the VWAP turns its trend, in between it holds.

→ The core idea 15
→ What it waits for 15
→ On the chart 15
→ Good days, hard days 15

## The core idea

> **NOTE** **The VWAP is the session's fair price. Whoever trades beyond it leads.**
>
> The VWAP was born on institutional desks: a fund that buys a large block is judged by whether it paid more or less than the day's volume-weighted average. That makes it the average price the session has paid — the line where the day's business is even, and the one the big orders keep an eye on. A close a fair distance beyond it says one side is paying up while the other sits under water. The dvi engine follows that side for as long as it holds, and steps aside in chop: when the closes cross the VWAP back and forth, nobody is in control.

## What it waits for

Once the VWAP has had a moment to settle, a close well above it turns dvi long, a close well below it short. Each change is an entry at its close. dvi is at home in the first part of the session, while the open's trend is fresh, and steps aside when price chops around the VWAP. `Trade` · `Long & Short`, `Long Only` or `Short Only` restricts its side. `Stop` · `1 ATR`, `Other Change Line`, `VWAP` or `Signal Candle` picks where its stop sits. `Target Ladder` · `Lean` uses the map's levels; `Lean + σ` and `VWAP σ` add or use the VWAP's bands, `Std Dev` steps of the trade's own move.

## On the chart

`▲` over `DVI` below the bar for a long, `DVI` over `▼` above it for a short. With `VWAP & Bands` on, the change lines show where a close would turn it.

## Good days, hard days

Strong when the cash open sets a trend and keeps it, on cash indices and stocks above all. Hard when the session chops around the VWAP: then nobody leads, and dvi waits.

SECTION 9

# 09 🧊 The ice engine

ice waits until several momentum readings agree, then rides that way.

→ The core idea 16
→ What it waits for 16
→ On the chart 16
→ Good days, hard days 16

## The core idea

> **NOTE** **When different gauges flip the same way at once, the move has started.**
>
> Each momentum reading measures the push in its own way, and each one alone flips back and forth. When most of them turn the same way within a short span, while the other side stays quiet, a move has begun that they can all see. A lower timeframe saying the same thing is the second witness.

## What it waits for

`ICE Trigger` sets how many of the readings must agree; the strictest setting is the default. The signal is the first bar where one side gets there, at its close, anywhere in the session. `LTF Confirmation` asks a lower timeframe to have fired the same way just before; without it the signal stays a dim mark. ice has its own `Auction Failed` switch, off by default.

## On the chart

`▲` over `ICE` below the bar for a long, `ICE` over `▼` above it for a short.

## Good days, hard days

Strong on a clean push that starts with conviction. Hard in a nervous market where the readings flip every few bars. Looser trigger settings fire far more often: treat them as a way to look.

SECTION 10

# 10 🤖 The Autopilot

`🤖 Autopilot` is the sixth choice in `Engine`. It does not add a new trigger: it picks one of the five engines for each session, and that session is drawn and traded as the chosen engine draws and trades it.

→ The maps 17
→ How you see it 17

## The maps

`Autopilot Map` decides how the engine is picked:

- **`First Signal`** (default). At the open all five engines are live, each on its own terms. The first one whose signal counts takes the session: that signal is the trade, and the engine keeps trading the session as it would on its own. Picture five sprinters on the blocks: whoever leaves first runs the race. While nobody has spoken, the readout says `every engine waits for the first signal`.
- **`Against The Drift`** and **`Prior Map`**. The backdrop picks the engine at the bell instead: each map pairs a kind of backdrop — balanced, drifting, trending — with the engine that suits it. While the backdrop is not known yet, the Autopilot waits ( `standby` ).

## How you see it

The Autopilot's trades carry ✦ on the outside of their mark: `▲` over `CLX` over `✦` below the bar for a long, `✦` over `CLX` over `▼` above it for a short. The readout says `r3m· 🅰 climax · …`. The alerts keep the engine's own name. The chosen engine trades both sides, as it always does, and keeps the settings of its own group.

> **TIP** **A way to watch, not a promise**
>
> The Autopilot is a lens: it shows how the engines take turns from one session to the next. Watch it next to the engine you trust before you lean on it.

SECTION 11

# 11 The trade

Whatever the engine, a trade is built, managed and closed the same way.

→ Targets 18
→ The exit 18
→ Dim marks 18
→ The gates 18

## Targets

Each engine has its own ladder of targets: real levels ahead of the trade, the kind you see on the map. **TP1** is a first sensible level on that ladder, **TP2** a further one. Three inputs keep them in a sensible range: `TP1 At Most (R)`, ↳ `Else TP1 At (R)` for the case where no level lies in reach, and `TP2 At Most (R)`, which brings a very distant TP2 closer. `EQH / EQL As TP Rungs` · `By Engine`, `On` or `Off` decides whether equal highs and lows count as targets.

**R** is the unit of every trade: the distance from the entry to the stop. A target at two R pays twice what is risked.

## The exit

`Exit` · `½ TP1 + TP2` (default): a part at TP1, the rest rides on to TP2. `TP1 Full`: all out at TP1. `½ TP1 + VWAP Runner`: a part at TP1, the rest rides with the VWAP.

A stop counts on a **closed bar** beyond it, so the result names the close it fired on. A session that ends before TP1 closes the trade at its last close.

## Dim marks

While a trade is live, or when a signal does not qualify, the signal is drawn dim (↳ `Untraded Signals (Dim)`), with the reason in its tooltip — for example `a trade is still live`, `outside the window`, `no rung … ahead`, or a gate that turned it down. A dim mark is not a trade and sends no alert.

## The gates

Gates are filters you can switch on, all `Off` by default. A gated signal becomes a dim mark with the gate named in its tooltip.

- `Trail Gate` · `With The Trail` · `Against The Trail`: only trades on that side of the Trend Trail. Picture the wind: a trade either sails with it or tacks against it.
- `VWAP Gate` · `With VWAP` (the close on the trade's side of the session VWAP) · `With VWAP Colour` (the whole candle on it).

- `Backdrop Gate` · `Balanced Only` · `Skip Trending` · `Trending Only` · `With The Drift` · `Against The Drift` · `Trending · With The Drift` · `Trending · Against The Drift`. The drift is the direction the backdrop leans.

SECTION 12

# 12 Auction Failed

Every model gets the question: what happens when its trade fails? A failed setup traps its traders, and their stops fuel the move the other way. r3m can take that trade with every engine.

→ The core idea 20
→ What it does 20
→ Its inputs 20

## The core idea

> **NOTE** **From failed moves come fast moves**
>
> An old saying among floor traders. Connors and Raschke built their Turtle Soup on it: the breakout the famous Turtles bought, faded the moment it failed. A setup that fails leaves its traders on the wrong side, with their stops just beyond. When price runs through them, those stops turn into orders the other way and push the move along. The Auction Failed takes that trade: the trap is the signal. It is not a guess against the engine — it only comes after the engine's own idea has visibly broken.

## What it does

When the trade's idea fails, the failure trade can follow the trapped side the other way. It is drawn as ◇ with `AF`, with its own stop and target stubs, and it is reported like any trade.

## Its inputs

| Setting | What it does |
|---|---|
| `Auction Failed` | on / off for every engine (ice has its own switch in its group) |
| ↳ `Fires On` | `By Engine` · `Own Failure` · `VWAP Flip` · `Stop-Out Close` : which sign of failure it waits for |
| ↳ `Target (R)` | the failure trade's first target: by engine, the ladder, or a fixed distance |
| ↳ `Out Early On A VWAP Flip` | `Auto` · `On` · `Off` : whether the VWAP turning back closes it early; Auto decides by market |
| ↳ `Alerts For Every Engine` | off: only lava's and dvi's failure trades send alerts, the others are drawn on the chart only — a what-if timeline of where the trapped crowd went · on: every engine's |
| ↳ `AF Only · No Engine Trades` | the engine's signals only prepare the failure trade; the engine itself takes none |

SECTION 13


# 13 On the chart

→ The entry mark 21
→ The readout 21
→ The Engine Consensus Board 21

## The entry mark

One mark at the entry, the glyph nearest the candle: `▲` over `EQX` / `CLX` / `LVA` / `DVI` / `ICE` below the bar for a long, the tag over `▼` above it for a short (lava `△` / `▽`). A failure trade: `◇` with `AF`. An Autopilot trade: ✦ on the outside.

While the trade lives you see its stop as a short dotted line and its targets as small stubs with their tags; ↳ `Std Dev Ladder` adds dotted reference steps ahead of the trade. When the trade ends, the mark, the stop and the stubs stay; only the steps go. Hover the mark for the trade and how it ended:

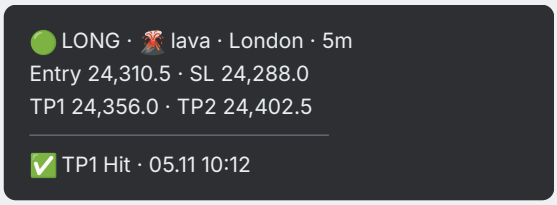


Other endings read `🏆 TP2 Hit`, `🛑 Stopped`, `🏁 Runner Closed` or `🏁 The session ended before TP1`.

## The readout

Bottom right by default (`Readout`, with its position and `Simple` / `Full`):

```
r3m· lava · London cash 08:00–16:30 London · LONG 24,310.5 · since 05.11 09:24
        VA 24,262.0 – 24,288.0 · POC 24,275.0 · PD BULL · balanced
```

The first line: the engine, the session with its hours, and the trade — or what the engine is doing: `waiting for a climax`, `waiting for a long trigger`, `no bias, no entries`, `done for the session`, `flat`, `AF armed ▲`. The second: the day — lava's value area, equinox's bias, the previous window's candle, how much of a normal day's range is used, the backdrop. `Full` adds the stop and TP1 to the first line and a short tally of the loaded history.

## The Engine Consensus Board

Top right (`Engine Consensus Board`): where the five engines stand this session, at a glance.




Each row shows whether that engine, by its own latest read of the session, sides with the majority of the engines (✓), against it (×), or has nothing to say yet (–, paler). While the votes are tied or nobody has spoken, every row shows –. The engine on duty stands in full ink. A dot before a name marks the engine that fits the current backdrop: white = its side is up, black = down. At the session's end the board freezes and turns paler until the next open, so you can see the session is over. The board places no trades. Picture a crew before a launch: the one at the controls does not count as a yes just because he sits there, and whoever has not checked in yet stays silent.

SECTION 14

# 14 Setting up alerts


→ What a message looks like 23
→ Emojis in the messages 24
→ Message Format and Telegram 24

1. **Right-click the chart → Add alert.**
2. **Pick r3m· as the condition, below it "Any alert() function call".**
3. **In the Notifications tab enter the webhook URL (Telegram) or set the format to Plain Text.**
4. **Save. After every change to the script or its settings: delete the alert and create it again.**

At most one message goes out per bar, at its close.


## What a message looks like

An entry:

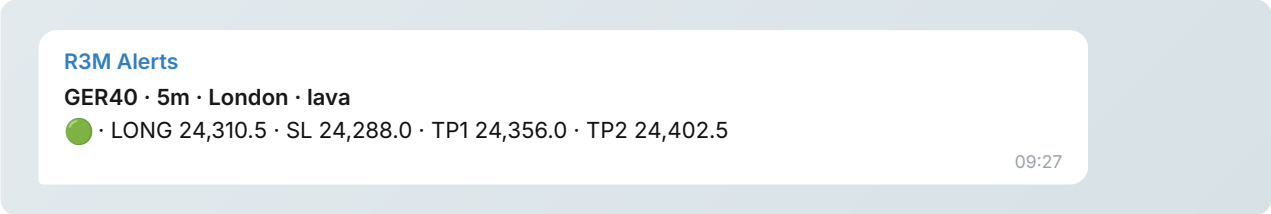


The header names the symbol, the timeframe, the session and the engine. Below it the trade: side, entry, stop, TP1 and TP2. The results follow on their own:

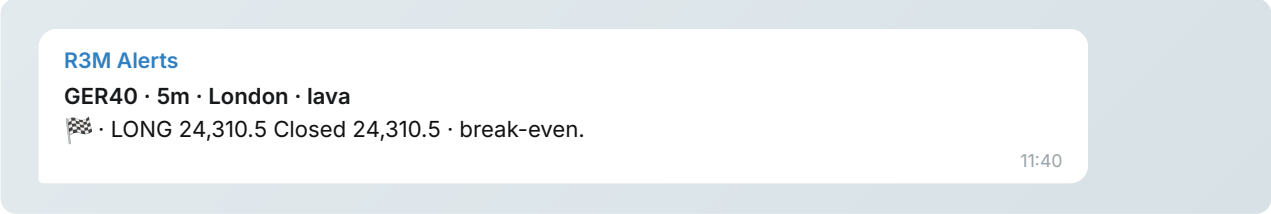


A stop reads `🛑 · LONG 24,310.5 Stopped at 24,286.0` — the close it fired on. TP2 reads `🏆 · LONG 24,310.5 TP2 Hit 24,402.5.` A failure trade arrives the same way, named as Auction Failed. A short is `🔴 · SHORT …`.

## Emojis in the messages

| Emoji | Meaning | When |
|---|---|---|
| 🟢 · 🔴 | long · short | the entry |
| ✅ | TP1 hit | result |
| 🏆 | TP2 hit | result |
| 🛑 | stopped | result |
| 🏁 | closed: the rest of the trade, the session end, a failure trade's end | result |

## Message Format and Telegram

`Message Format` · `Telegram` (default) sends a ready-made Telegram Bot API request to the webhook `https://api.telegram.org/bot<TOKEN>/sendMessage` (a paid TradingView plan is needed for webhooks); the header is bold and the ticker links to the chart. `Plain Text` sends the header on the first line and the message below it, for TradingView's own notifications or any other webhook.

Put your group's chat ID into ↳ `Telegram Chat ID`. ↳ 🔕 `Silent` decides which messages ring. They all arrive in the chat; the silent ones notify without sound or vibration:

| 🔕 Silent | What rings |
|---|---|
| `Off` | every message |
| `Results` (default) | only the entries and the failure-trade entries; the results arrive silently |
| `Results + AF` | only the entries |
| `All` | nothing rings |

SECTION 15

# 15 The screener · r3m·screener·

r3m·screener· runs r3m's body and the chosen engine on up to twelve symbols from one chart. Each symbol gets the same read as r3m itself, in its own home session, and one alert covers the whole watchlist.

→ Setting it up 25
→ The table 26
→ Ranking, reports, alerts 26

## Setting it up

Put it on a chart that trades nearly around the clock — EURUSD 5m, for example: a symbol's bar is only seen when the chart has a bar at that time. Choose the `Engine` first, then the `Watchlist` : `Custom` (twelve slots of your own) or a preset — Forex, Indices and Commodities on Pepperstone, the large S&P 500, Nasdaq 100 and DAX stocks, or futures on CME / Eurex. Keep the shared groups equal to r3m's. For two engines, put the screener on the chart twice.

`Session` · `Auto` is decided per symbol, so GER40 runs London and NAS100 New York in the same table. `History Bars` sets how much history each symbol reads; in Bar Replay lower it, or the chart may run out of memory.

**USDX / DXY are context only**: the dollar index gets its row — bias, session, backdrop, price — but no trade and no alert. Its row is dimmed and its setup cell says `context only`.

🤖 **Autopilot in the screener.** The same First Signal as in r3m·, but for each symbol on its own: at every symbol's open all five engines wait, and the first signal that counts takes that symbol's session. GER40 may be run by climax while EURUSD is run by lava. The table's far-left column shows each row's engine (`–` while all still wait); the row's tooltip says 🤖 `today` ⚡ `climax on duty`, and every alert line names its engine right after the symbol.

🧊 ice runs in the screener without its lower-timeframe confirmation (a symbol's read cannot reach a lower timeframe).

Not in the screener: r3m's drawings, the liquidity-run engine (a compact tracker of equal highs and lows stands in for the targets), the first presented FVG and the ◇ / ◑ marks.

> **IMPORTANT** **Screener or r3m·, not both**
>
> The screener sends every trade of the watchlist — the same trades r3m takes on each chart. With r3m's own alert running on a symbol of the watchlist too, every trade arrives twice.

## The table

r3m·screener· · lava

| # | symbol | runs | TP1 | TP2 | stop | with | against | bias | trail | setup · 5m | status | price |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | EUSTX50 | – | – | – | – | – | – | BULL | ▲ | ▼ accept·VA | TP1 Hit | 5,398.4 |
| 2 | US500 | – | – | – | – | – | – | BULL · rev | ▼ | – | waiting | 6,788.2 |
| 3 | GER40 | – | – | – | – | – | – | BEAR | ▼ | ▲ accept·VA | Live | 24,310.5 |

| Column | Meaning |
|---|---|
| **runs · TP1 · TP2 · stop** | The symbol's record on this engine over the loaded history: how many trades, and how they ended. |
| **with · against** | The same record, split by the session VWAP at the entry (for dvi by the day bias). |
| **bias · trail** | The day bias ( `rev` = turned overnight) · the Trend Trail's side, ▲ / ▼. |
| **the day · ADR · ATR** | The session, the backdrop, lava's value area · how much of a normal day's range is used (⊘ once used up) · the typical bar size, optional. |
| **setup · since · status** | Today's trade, when it fired and where it stands: `Live` , `TP1 Hit` , `TP2 Hit` , `Runner Closed` , `Stopped` , `Session End` , for a failure trade `Closed` . |
| **price** | The last close. |

Hover a row for its report line. The colours run from strong to weak: live orange, targets green, stopped red, fading over the hours.

## Ranking, reports, alerts

`Sort By` · `Engine Performance` or `Today's Setup` . `Report 1` and `Report 2` send the top of the table ( `Top N In The Report` ) at the times you set, with a footer for the watchlist. ↳ 🔕 `Silent` works as in r3m·, message by message; the reports ring only with `Off` . `Send A Test Report On The Next Bar Close` checks the delivery.

The entries and results go out as one message per bar:

R3M Alerts
🌋 **r3m lava screener · 5m · Auto 09:27**
🆕 · 🟢 GER40 · LONG 24,310.5 · SL 24,288.0 · TP1 24,356.0 · TP2 24,402.5
✅ · EURUSD · SHORT 1.16210 TP1 Hit 1.16120.
09:27

The header carries the engine's icon and name ( 🌓 `r3m equinox` , ⚡ `r3m climax` , 🌋 `r3m lava` , 📈 `r3m dvi` , 🧊 `r3m ice` , 🤖 `r3m autopilot` ) and the `Session` setting. Each entry starts with 🆕 and the symbol; results stay one line each.

SECTION 16

# 16 The settings

Labels as in the settings dialog. Each engine's own group is greyed out when another engine is chosen. The groups hold more inputs than listed here — the sizes, buffers and windows that tune each engine. They are set where the engine was built to run; change them only when you know why.

→ 0 · Engine 27
→ 1 · Session 27
→ 2 – 5b · The engines 27
→ 6 · Trades · Every Engine 28
→ 7 · Liquidity Runs 28
→ 8 · Visuals 28
→ 9 · Alerts 28

## 0 · Engine

| Setting | What it does |
|---|---|
| `Engine` | 🌓 equinox · ⚡ climax · 🌋 lava · 📈 dvi · 🧊 ice · 🤖 Autopilot |
| ↳ `Autopilot Map` | `First Signal` · `Against The Drift` · `Prior Map` (section 10) |

## 1 · Session

| Setting | What it does |
|---|---|
| `Session` | `Auto` · `Asia` · `London` · `New York` (section 3) |
| ↳ `Hours` | `Cash` · `Killzone` · `Custom` |
| ↳ `Custom` · ↳ `Timezone` | your own window and its time zone |
| `Weight By Volume` | the VWAP and lava's value area weigh each bar by its volume |

## 2 – 5b · The engines

One group per engine: `2 · 🌓 equinox`, `3 · ⚡ climax`, `4 · 🌋 lava`, `5 · 📈 dvi`, `5b · 🧊 ice`. The choices a trader usually touches are named in each engine's chapter (sections 5–9): equinox's `Day Bias`, triggers, events, `Stop` and `Second Shot` · climax's `Climax Bar (× ATR)` (read for every engine's ϟ), `Climax Timeframe`, `Climaxes`, `Stop Room (× The Wick)` and `Exit` · lava's value area and acceptance · dvi's `Change Beyond VWAP ± σ`, `Trade`, `Stop` and `Target Ladder` · ice's `ICE Trigger`, `LTF Confirmation` and its own `Auction Failed`.

## 6 · Trades · Every Engine

| Setting | What it does |
|---|---|
| `Trades` | off = the map only |
| `TP1 At Most (R)` · ↳ `Else TP1 At (R)` · `TP2 At Most (R)` | keep the targets in range (section 11) |
| `EQH / EQL As TP Rungs` | `By Engine` · `On` · `Off` |
| `Exit` | `½ TP1 + TP2` · `TP1 Full` · `½ TP1 + VWAP Runner` |
| `Trail Gate` · `VWAP Gate` · `Backdrop Gate` | section 11 |
| `Auction Failed` and its ↳ inputs | section 12 |

## 7 · Liquidity Runs

`Draw Levels & Tags` · the swing inputs · `Only Open FVGs Break It` · `HRLR` · `Runs Behind An Open FVG` with ↳ `HTF FVG In Path Breaks It Too` · `EQH / EQL` · `Tolerance (Ticks)` · how many runs to keep live and in history · `Tag Row Merge`.

## 8 · Visuals

- `VWAP & Bands` with ↳ `dvi Change Lines` and its band inputs.
- `Trend Trail` with ↳ `Sensitivity`, ↳ `Trading Style`, ↳ `Auto Sensitivity`, ↳ `Bull · Bear` · `Volatility Bands` with ↳ `Color` and ↳ `Draw Only In The Session` · `Timeframe Board`.
- `lava` · `VAH / VAL / POC` with ↳ `HVN / LVN` · the previous session's levels with ↳ their projections · `1st Presented FVG (1m)` · `The Open` · `◇ 210m Signature Quarters` · `◑ Session Handover` · `Climax Marks` · `ϟ`.
- `Gaps & Taps` with ↳ `Draw Boxes & Tags`, ↳ `□ First Tap Marks` and ↳ `First Taps`.
- `Entries, Stops & Targets` with ↳ `Std Dev Ladder` and ↳ `Untraded Signals (Dim)`.
- `Mini Panels` · `1H` / `210m` / `7H` with ↳ `Climax ϟ`, ↳ the quarter lines, ↳ `Distance (Bars)` and ↳ `Panel Candles`.
- `Readout` (position · `Simple` / `Full`) · `Engine Consensus Board` · `Keep Previous Sessions' Levels`.
- `Colors` · `Theme` (from the chart's own colours) or `Custom` (your colour fields); the trail and the bands keep their own colours · `Display Time Zone` (the zone of every time the script writes; the session keeps its own clock) · `Monospace Font` · `Font Size`.

## 9 · Alerts

`Entries & Results` · `Message Format` (`Telegram` · `Plain Text`) · ↳ `Telegram Chat ID` · ↳ 🔕 `Silent` (section 14).

R 3 M

# r3m·

One Body · Five Engines · One Session

**R3M** · r3m· and r3m·screener· for TradingView (Pine Script v6) · Edition November 2026

The engines stand on well-known ideas: the value area and auction market theory after J. Peter Steidlmayer and James Dalton, the exhaustion bar after Linda Raschke, the session VWAP of the institutional desks, and liquidity, fair value gaps, CISD and killzones in ICT's terms. This guide explains a tool; it is not financial advice.