R 3 M



GUIDE

equinox·

Essence Model · Bias · 7h Profiles · Entries

EDITION
October 2026

PLATFORM
TradingView · Pine Script v6

SCRIPTS
equinox· · eqx·screener·

EQUINOX· GUIDE

Contents

01 **What equinox does** 3
Three questions a day, always in the same order

02 **Quick start** 4
Timeframe, clock, patience — running in five minutes

03 **The daily bias** 6
Previous day, the 25 % pivot, reversal, projections, climax

04 **The session grid** 12
Three 7h blocks, the 8–9 range, session liquidity

05 **Everything on the chart** 15
A legend of every line, zone and mark

06 **Reading the status readout** 19
Four lines, field by field

07 **The 7h frameworks and profiles** 22
F1–F4, P1–P4B and the entry gate

08 **Entries** 24
The chain, the tooltip, TP1 / TP2 and the trade's fate

09 **The mini-panels and SMT** 30
Three resolutions beside price

10 **The settings** 33
Every input, group by group

11 **Setting up alerts** 41
One alert, the day read, drivers and passengers

12 **The session clock** 48
London, New York, Asia — and what they shift

13 **Two clocks at once** 50
The second reading and the handover

14 **Reading a day** 53
From 18:00 to 18:00, hour by hour

15 **What the chart does not show** 55
The bookkeeping behind the marks

16 **Common mistakes** 59
What is really going on

17 **The screener · eqx·screener·** 61
Ten symbols, one ranking, every entry

18 **Glossary** 70
The terms in one line each

19 **Ten sentences that replace the rest** 72
The short version

IMPORTANT **This explains a tool, not a trading strategy**

equinox (R3M) measures and names what the market has already done. It does not predict what it will do next. Every number in this guide is a default, not a law — the rules of the model come from the Essence Model (rytrades), the 7h profiles (AM Trades), the session reads of Hudson Trades and, for the climax, Linda Raschke's trading rules. None of it is financial advice, and none of the settings are tuned to your market.

SECTION 1

01 What equinox does

equinox answers three questions every trading day, in this order. Understand the order and you understand the whole indicator.

→ The one core idea 3

→ What you need 3

Question	What the indicator answers	When
1 · Which direction?	The bias, taken from the previous day's candle. A bullish previous day points to a bullish day until a close breaks the 25 % level.	At the open, 18:00
2 · What kind of day?	The 7h framework or profile. It names which session manipulates and which expands — F1 through F4, P1 through P4B.	01:00, 08:00 or live 08–11
3 · Where to enter?	The entry. A protected trigger in the working direction, coming out of a qualifying event — with a pro / contra that shows what else stood behind it, and two targets on the liquidity ahead.	Inside the window, 09:00–10:30 by default

All three layers build on each other. The bias sets the direction. The framework says whether that direction is tradable today or whether the day is running against it. The entry is only the last mile: the moment a concrete trigger shows up in exactly that direction.

The indicator does not trade and gives no buy or sell recommendation. It labels the chart, writes what it currently sees into a status readout and, if you want, sends it to your phone. The decision stays with you.

The one core idea

> **NOTE** **Manipulation before expansion**
>
> The whole model rests on a single thought: before the market runs in one direction, it first takes the liquidity on the other side. A session takes a level (that is the manipulation), closes back through it, and the next session runs away from it (that is the expansion). F1 through F4 are nothing more than the four answers to the question: which session manipulated, and which one expands because of it?

What you need

- A TradingView chart on a timeframe that fits the session grid (section 2 explains which ones do).
- Enough history loaded for the previous day to be complete.
- Some patience: before 08:00 the picture is incomplete, and that is by design, not a fault.

SECTION 2

02 Quick start

Five minutes and everything is running. The defaults are deliberately chosen so you do not have to touch anything — with one exception, the timeframe.

→ Step 1 · Pick the right timeframe 4
→ Step 2 · Check that the clock is right 4
→ Step 3 · Watch first, trade later 5

Step 1 · Pick the right timeframe

The one setting you really have to understand. equinox splits the day into three blocks of seven hours each. For those boundaries to land cleanly on a candle open, your timeframe has to divide 420 minutes evenly — and for the 210-minute confirmation, 210 as well.

Timeframe	7h	210m	Recommendation
1m, 2m, 3m, 5m, 6m, 10m, 15m, 30m	yes	yes	Ideal. 5m for entries (in the replay on 21 symbols equinox kept more after costs on 5m than on 3m), 3m works too, 15m for the overview.
7m, 14m, 21m, 35m, 42m, 70m, 105m	yes	yes	Works, but unusual.
60m (1H)	yes	no	Frameworks run; the 210m confirmation falls back to chart closes.
45m, 90m, 4H, Daily	no	no	Do not use. The status readout warns you.

> **TIP** **If something is not showing, it is almost always the timeframe**
>
> If the status readout says `7h · Unsupported Chart TF (Use One Dividing 210m)`, your timeframe does not divide the 420 minutes. Switch to 5m or 15m. Entries also stand down on charts above 15 minutes by default — that is not a fault, it is the `↳ Max Entry Timeframe` filter.

Step 2 · Check that the clock is right

Look at the first line of the status readout at the bottom of the chart. With the defaults — second clock and handover both on — it starts with the reading on duty:

```
▸ London · PD BULLISH · Bias BULL · 210m Intact · ✓ A+
```

`▸ London` is the clock whose reading applies right now. With the second clock switched off there is no clock tag; the model then runs on the clock set under `First Session Clock` (group 6), and every alert names it in its header (`GER40 · 3m · London · equinox v10.24b`).

Out of the box `First Session Clock` is set to `London`, and London runs on Berlin hours — which is why the readout says London even on a DAX chart. That default is right for the DAX, the European indices, the FX majors, metals and energy. If you want to trade the US open — US indices, gold or EURUSD on the New York grid — pick `New York`; `Asia` is the clock for JP225 and the yen crosses. Section 12 explains the three clocks and what they shift.

A second clock also runs by default (`Second Session Clock (Next In Cycle)`, on): it follows automatically as the next one in the cycle London → New York → Asia — on the DAX that is New York —, so the readout and the chart carry two readings from the start. From 14:00 Berlin time, which is 08:00 in New York, the tag switches to `▸ New York`. Section 13 explains both readings and the handover between them.

Step 3 · Watch first, trade later

Let the indicator run for a few days without acting on it. How often does a framework get assigned and later discarded? How often does the 25 % level hold? That observation is worth more than any setting you change on day one.

> **NOTE** **The most important number first**
>
> If you take away only one thing from this guide: the 25 % level is the pivot. Everything else — frameworks, entries, targets — hangs on whether that one level holds. Section 3 explains it.

SECTION 3

03 The daily bias

The bias is the underlying direction of the day. It comes from one single piece of information: the completed previous-day candle.

→ Where the bias comes from 6
→ The 25 % and 50 % levels 6
→ Invalidation — when the bias falls 7
→ The reversal framework 8
→ The projections 9
→ The climax 10

Where the bias comes from

Previous-day candle	Bias	Status readout
Close above open	bullish	`PD BULLISH · Bias BULL`
Close below open	bearish	`PD BEARISH · Bias BEAR`
Close = open (doji)	none	`PD NEUTRAL · No Bias (Doji)`

PD stands for previous day. On a doji day the indicator draws no levels and fires no entries — the previous day made no statement.

> UNDER THE HOOD **Why the previous day comes from TradingView's daily series**
>
> The indicator does not assemble the previous-day OHLC from chart bars; it reads it straight from the daily series. That way a 3-minute chart sees exactly the same previous day as a daily chart, regardless of data gaps or session settings. On top of that, settlement as close is switched off for this request, because a settlement price instead of the true close can flip the bias.

The 25 % and 50 % levels

Here comes the part that trips people up most often — and it is simple once you have seen it the right way round.

The levels are not laid over the whole previous-day range, only over the part between the previous-day close and the opposite extreme:

	Measured from … to	25 % sits	Invalidated by
Bullish previous day	previous close down to the previous low	just below the open	close below 25 %
Bearish previous day	previous close up to the previous high	just above the open	close above 25 %

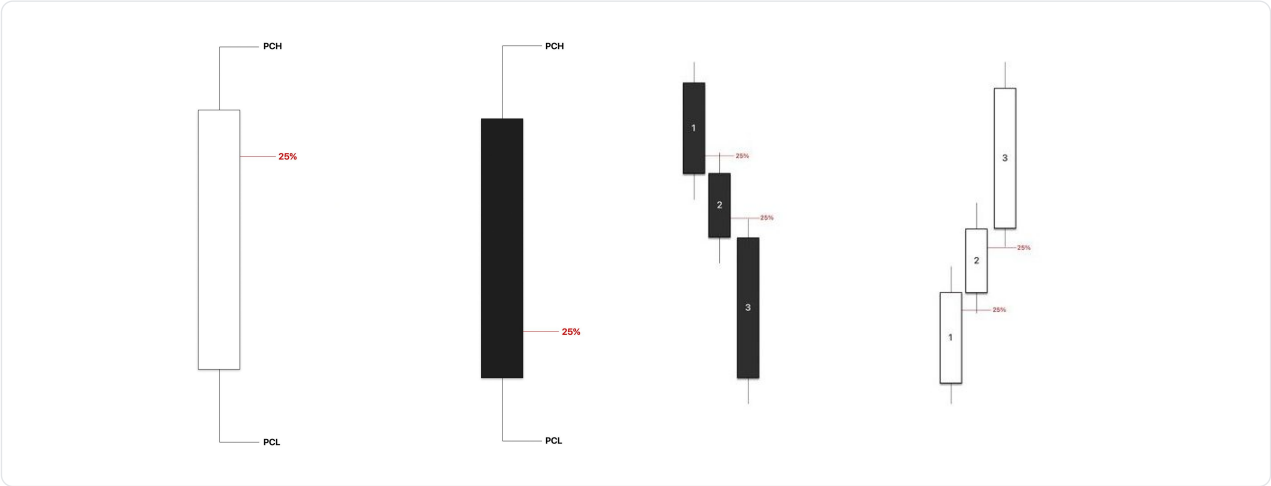


Fig. 1 **Nothing more is needed:** previous-candle high, previous-candle low, and the 25 % between close and opposite extreme. Left the bullish candle — the quarter sits just below the open —, right its bearish mirror. **Why this holds up:** a trend is a chain of candles each respecting the 25 % of the one before — stacked down on the left, up on the right. When a close breaks through the quarter, the chain snaps.

So the zero point sits on the previous-day close — and that is exactly where the new day opens. The 25 % level is therefore a shallow lid or floor close to the open. The thinking behind it: on a genuine continuation day the market may pull back briefly against the direction, but not deeply. A pullback that breaks through that first quarter mark on a closing basis was no longer a pullback.

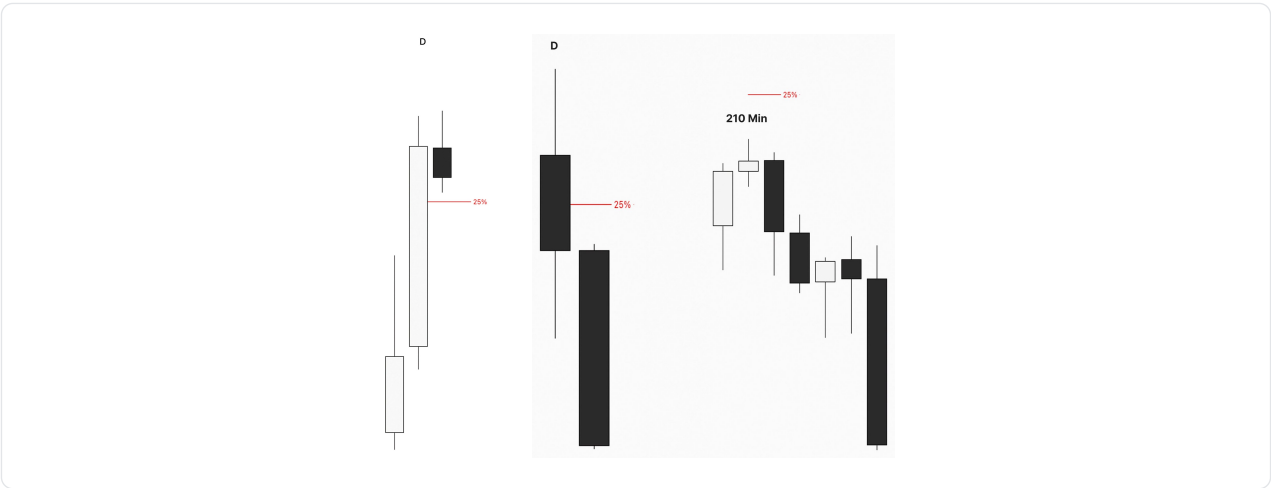


Fig. 2 **On the daily chart:** left the bullish case — the new day opens at the previous close, the 25 % sits just underneath and holds. Right the bearish counterpart with its 210-minute resolution: no close back above the quarter, and the day keeps drifting in the working direction.

Invalidation — when the bias falls

Not every wick counts. It takes a close beyond the 25 % level. Two settings decide which close even gets asked:

- `Validate With 210m Closes` (on): only a fully completed 210-minute candle can invalidate. A single 3-minute outlier cannot tip the day.
- `Overnight Candles Only (18:00–08:00)` (on): only the four overnight candles between 18:00 and 08:00 may invalidate. From 08:00 the bias is locked in for the deciding session.

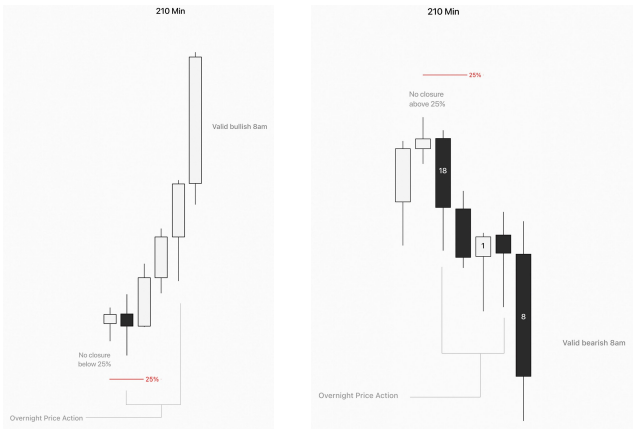


Fig. 3 **The night decides:** left the bullish day holds — none of the overnight 210s closes below the 25 % (wicks are allowed), so the long bias is valid at 08:00. Right the bearish mirror: no close back above the quarter, and the short bias is valid at 08:00.

If the 50 % level breaks as well, the day is settled — the bias can no longer be reclaimed.

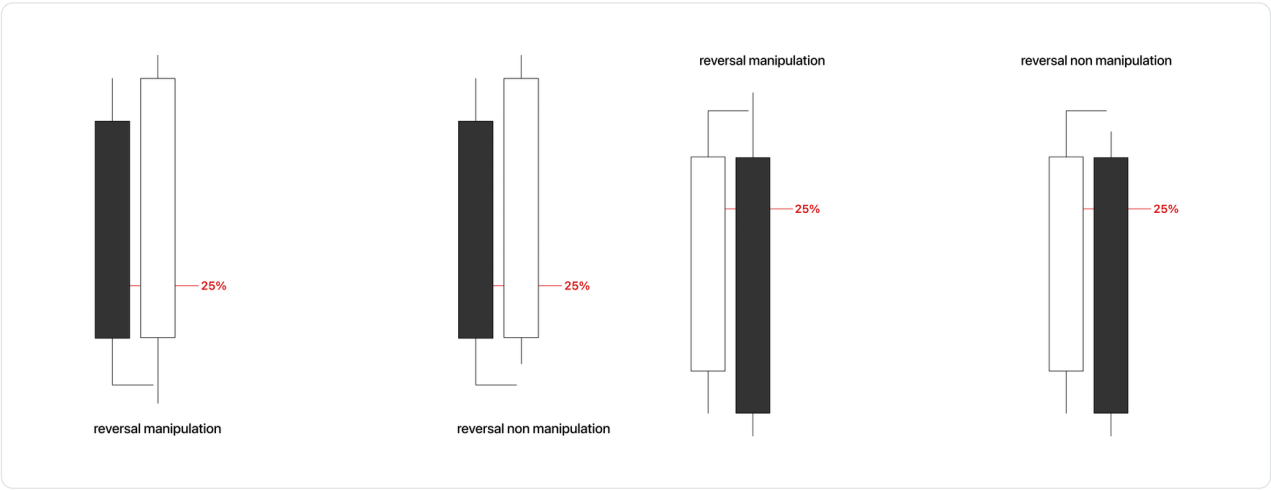


Fig. 4 **Two ways through the 25 %:** on the left of each pair the 210m candle first runs the extreme of its predecessor and then closes through its quarter (reversal manipulation), on the right the same reversal without a sweep (reversal non manipulation). Bullish above, bearish below. For the bias both count the same — the close decides, not the path to it; the manipulation only says that liquidity was taken first.

The reversal framework

A broken 25 % level does not simply kill the day. With `Reversal Framework On 25% Break` enabled, something important happens: the working direction flips. A bullish previous day gives `Bias BULL` ; a candle that closes below the 25 % turns the working direction to BEAR, and the first line of the status readout says so:

```
PD BULLISH · BULL → BEAR · Reversal · Expecting Lower
```

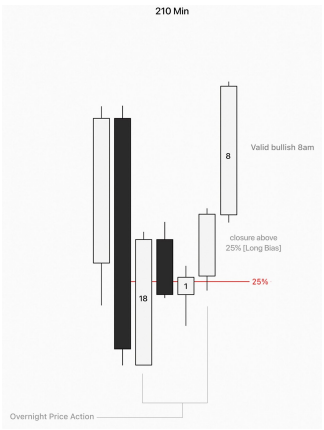


Fig. 5 **The flip in one picture:** bearish previous day, so the 25 % sits above the open. An overnight candle closes above it — the working direction turns long, and the 08:00 candle expands in the new direction.

The projections jump to the other side of the previous-day range, and entries fire in the new direction from then on. If price later closes back through the 25 % — and the 50 % was never broken — it flips back once more: the readout then reads `25% Reclaimed · A Framework`. The day is no longer an A+ setup, but it is tradable again in the original direction.

The break and the reclaim leave no mark of their own on the price chart. You read them in the first line of the status readout (section 6), in the day read on top of every alert (`rev` , `reclaimed` , section 11) — and you see them in the projections changing sides.

The projections

Above or below the previous-day range equinox draws two dotted target lines: `PDH +25% / +50%` when the working direction is bullish, `PDL −25% / −50%` when it is bearish. They measure a quarter and half of the full previous-day range, added to the respective extreme. These are expansion areas, not order targets.


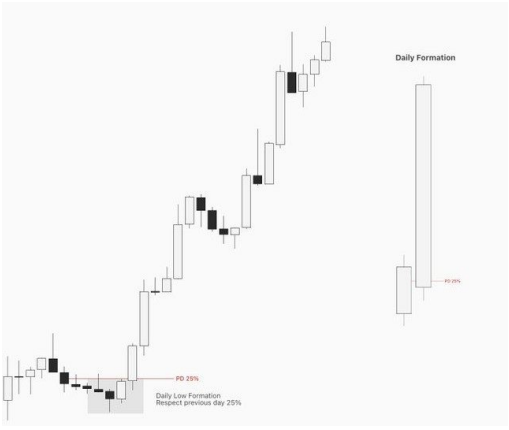


Fig. 6 **What this produces:** a day that respects the previous-day 25 % and expands into the projections leaves exactly the formation on the right on the daily chart — a small manipulation below the level, then a long body in the working direction.

The climax

Not every day ends with a close through the 25 %. Some end with a single candle that runs too far — and equinox marks it. A climax bar is a candle at least `↳ Climax Bar (× ATR)` wide (twice the ATR(14) by default) that prints a new day high or day low and closes back in the opposite half of its own range. The market saw the extreme and rejected it within the same candle. The switch is called `ϟ Climax` and is on by default.

A climax is live from its close until the day ends or a close runs through its extreme. When it prints, a ϟ is set above the candle (climax at the day high) or below it (at the day low), and it stays there as a record — whether the climax is still live only matters for the entry gate. The hover tooltip reads the candle against the day's levels and always ends with its width in ATR(14) and the timeframe it was read on. One of four readings, here as on a 3m chart with `↳ Climax Timeframe` on its default `MTF`:

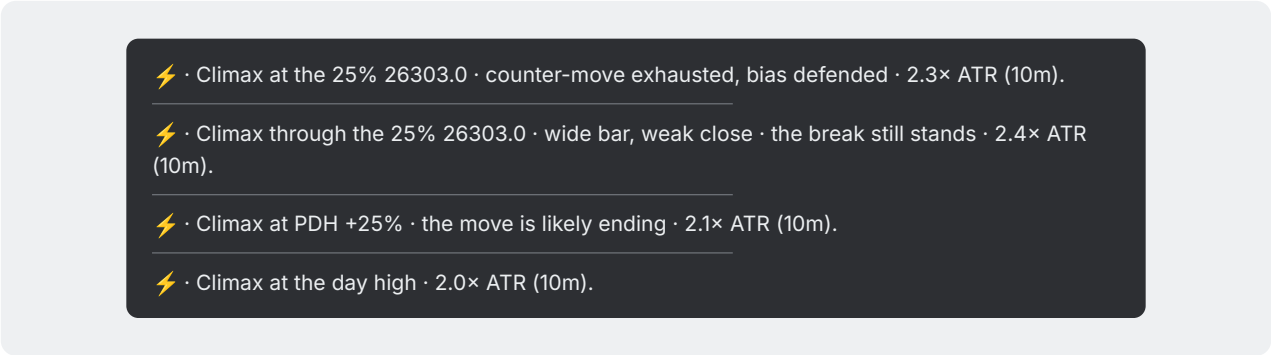

Four readings, in this order of precedence: **at the 25 %** — the candle swept the 25 % of the day's bias and closed back on the right side (with a bull bias its low at or below the level and its close above it; with a bear bias the mirror image): the level was tested and held. **Through the 25 %** — the same candle, but the close sits beyond the level: a wide bar with a weak close, yet the break stands; the prototype counted those days, and the level was rarely reclaimed afterwards. **At the projection** — the candle's extreme reached `PDH +25%` or `PDL −25%` in the working direction: the move is probably ending there. **At the day extreme** — everything else. The ATR figure says how far the candle exceeded normal size; by default it must be at least twice it.

What this means for entries is decided by `↳ Block Entries Into A Live Climax`. With the switch on (the default), no entry fires in the direction of a live climax — no longs into a climax at the high, no shorts into one at the low. An entry against it carries `climax behind it (with)` in its pro / contra (section 8); otherwise that fact reads `no climax behind it`. With the switch off everything stays visible — the mark, the alert tag, the pro / contra fact — but nothing is blocked.

In the alerts the climax rides along as a short passenger tag at the end of the day read (section 11), for example `⚡ 25% defended 2.3× ATR`. The four kinds read `25% defended`, `through the 25%`, `at the projection` and `day high` / `day low`. The full reading stays in the mark's tooltip.

Which candle the climax is read on

`↳ Climax Timeframe` decides which candle is measured. `Auto` picks a higher timeframe matched to the chart: 1m → 5m, 2m/3m → 10m, 5m → 15m, 10m → 30m, 15m/20m → 1H, 30m → 2H, 1H → 4H, 4H → 1D, 1D → 1W. `MTF`, the default, reads that timeframe and the step below it as well, as long as the step is not below the chart: 10m + 5m on a 3m chart, 5m + 3m on a 1m chart, 10m + 5m on a 5m chart and 15m + 10m on a 10m chart (since v10.24b the lower one is then the chart candle itself, which paid best in the replay), 1H + 30m on a 15m chart. Each of the two is judged on its own completed candles against its own day extreme.

If only the lower one prints a climax, it stands in; if both print on the same bar, the higher one is read. `Chart` reads the chart candle itself, and the tooltip then carries no timeframe suffix. Or pick a fixed one from the list (1m … 1W).

A higher timeframe is read on its completed candles: width, day extreme, close position and the ATR(14) then belong to that candle, not to the chart candle — a 10m climax on a 3m chart is a 10m candle twice as wide as the 10m ATR. The mark sits at that candle's extreme, at its middle in time, and the text names the timeframe — under `MTF` the upper one of the pair, `· 2.3× ATR (10m)`, also when the 5m candle printed it. Live window, gate and pro / contra stay the same.

Why the pattern earns a switch of its own: tested on ten markets, nine of ten climax bars were fully retraced the same day, and a climax that defended the 25 % held it more often than an ordinary touch.

> **NOTE** **A climax is a read, not a trigger**
>
> The mark says that the market has exhausted an extreme — not that it is turning now. equinox uses it as a brake on entries into the exhausted direction and as a fact in the entry's pro / contra. The trigger remains what section 8 says it is.

SECTION 4

04 The session grid

equinox splits every trading day into three blocks of seven hours. That split is the basis for all frameworks.

→ Which market sits in which block 12
→ The 8–9 range 13
→ Why 10:30 is the cutoff 14
→ What a block leaves behind 14

Block	Time	Role in the model	On the chart
Block 1	18:00–01:00	The day begins. Quiet, often a range — but the place where F1 is decided.	shading (optional) with the session name
Block 2	01:00–08:00	The first real volatility. F2 and F3 are settled here.	shading (optional) with the session name
Block 3	08:00–15:00	The deciding session, always the cash open of the chosen clock. F4 is called live here, entries run in the 09:00–10:30 window.	no shading, but the 8–9 range

Which market sits in which block

The blocks are cut at fixed clock hours. Which session actually falls inside them depends on the session clock (section 12) — and equinox names them accordingly:

Clock	18:00–01:00	01:00–08:00	08:00–15:00
London	New York	Asia	London
New York	Asia	London	New York
Asia	London	New York	Asia

It is the same Asia → London → New York cycle every time, rotated so that the deciding block lands on the cash open of the chosen clock. On the London clock (Berlin hours) 08:00–15:00 is the European session, and 01:00–08:00 really is Asia.

> UNDER THE HOOD **This affects the names only**
>
> F1 through F4 describe relations between blocks — block 1 manipulates, block 2 expands — and never name a market. Detection is identical on every clock; what changes is the labels on the shaded areas, the panel tags and the status readout.

The three boundaries at 18:00, 01:00 and 08:00 are drawn as thin, full-height vertical lines (`Session Dividers (18:00 / 01:00 / 08:00)`, on). The grey areas of the first two blocks, by contrast, are an option: `Session Shading (1st & 2nd 7h Block)` is off by default. All times refer to the indicator's session clock, not your chart's timezone.

> **NOTE** **The day starts in the evening, not the morning**
>
> 18:00 is the start of the next trading day. Looking at the chart at 18:15 on a Tuesday means you are already looking at Wednesday. That is the futures logic behind the model and the single most common stumbling block.

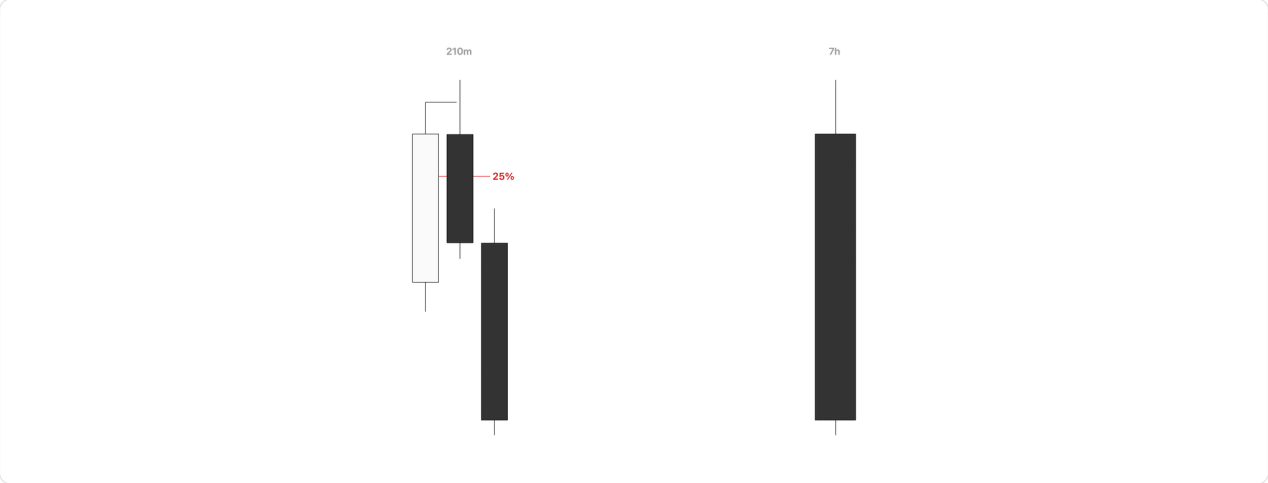


Fig. 1 **Three 210m candles make one 7h block:** the middle candle rejects its predecessor's 25 % and closes back, the third expands — on the 7h resolution a single bearish candle is all that remains. That is how the frameworks read a block: not candle by candle, but as what stands at the end of the seven hours.

The 8–9 range

Between 08:00 and 09:00 equinox measures the high and low and draws both as horizontal lines labelled `8–9 LON.H` and `8–9 LON.L` — with the session that falls there on your clock, abbreviated like the session tags (ASIA, LON, NY: `8–9 NY.H` on the New York clock). They are extended right to 10:30 — exactly across the entry window (`8–9 Range (→ 10:30 Cutoff)`, on). The switch only concerns the lines: the range itself is always measured, because the breakout entry, the day read and the targets need it.

This range serves two purposes. If it gets manipulated — one extreme taken and reclaimed — that is the classic setup for an entry against the manipulation. If instead it gets broken by a close in the working direction, that break itself is the signal (the Breakout entry model, see section 8).

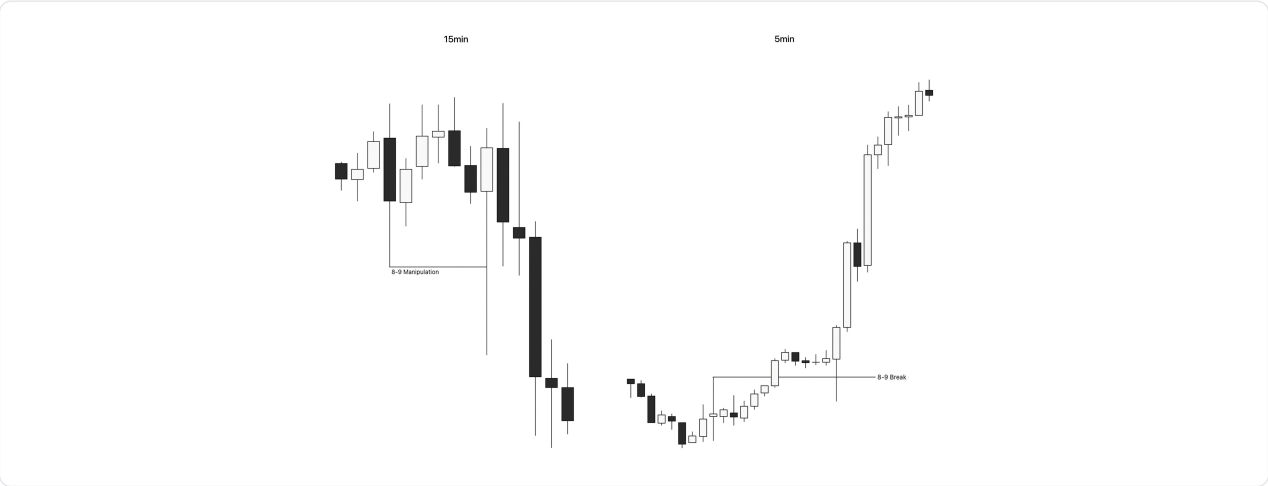


Fig. 2 **The two faces of the 8–9 range:** left the manipulation — the hour's low is swept, the close comes back, and the expansion runs against the sweep. Right the breakout — no sweep, but a close through the extreme in the working direction, and the break itself is the signal.

Why 10:30 is the cutoff

The entry window ends at 10:30 by default. The thinking: the deciding session's expansion is either under way by then or it is not coming. Entering later usually means trading the middle of a move that has already run. The window is a single setting, `Entry Window`, with a session string, `0900-1030` by default. You can widen it (say `0800-1100`), add further ranges with a comma (`0900-1030,1530-1700`) or switch it off entirely — but then the model loses one of its most effective filters. With a second clock the same window applies on that clock's own time — 09:00–10:30 New York is 15:00–16:30 Berlin time —, so an afternoon range is usually unnecessary.

What a block leaves behind

A completed 7h block does not vanish without a trace. Its high and low stay on the chart as session liquidity: thin horizontal lines labelled `10/1 ASIA.H`, `10/1 LON.L`, `10/1 NY.H` — month/day and session —, extended right until price takes them. They are cut on the first clock's grid. The 8–9 lines use the same naming scheme (`8–9 LON.H`). After a sweep the line is kept (`↳ Preserve After Sweep`, on) or removed; a day after the sweep it is dropped either way. Which sessions are drawn is set under `Session Liquidity (.H / .L)` with `Asia · London · New York`.

These levels are more than labels. They are part of the liquidity ladder that sets an entry's TP1 and TP2 (section 8) — and they keep that role even with `Session Liquidity (.H / .L)` switched off, which only hides the lines. And they feed the `◌ Session Liquidity Taken` passenger, which reports the levels just run by name (`✂️ ASIA.L · LON.H` in the message, section 11) — for the sessions that are drawn.

SECTION 5

05 Everything on the chart

A legend from top to bottom. Every item here can be switched off individually.

→ Lines and levels 15

→ Zones 16

→ Entries 17

Lines and levels

What you see	What it means
Solid line 25 %	The day's invalidation level. The most important line on the chart.
Line 50 %	The second threshold, drawn like the 25 %. If it breaks too, no reclaim is possible.
Dotted `PDH` `+25% / +50%`	Projections in the working direction, measured off the full previous-day range. With a bearish direction they read `PDL −25% / −50%`.
Dotted with a timestamp	The day open and the midnight 00:00 open (`Day & 00:00 Open Lines`).
`8–9 LON.H` and `8–9 LON.L`	High and low of the 08:00–09:00 hour, extended to 10:30, labelled with the session that falls there on your clock (LON, NY or ASIA + .H / .L, like the session tags). With a second clock each clock gets its own range, on its own hour — `8–9 LON.H / .L` and `8–9 NY.H / .L`.
Thin vertical lines	The session boundaries 18:00 / 01:00 / 08:00.
Grey areas (optional)	The first two 7h blocks, drawn as they develop and labelled with the session that falls there on your clock. Off by default (`Session Shading (1st & 2nd 7h Block)`).
Thin horizontal line, unlabelled	The level a framework manipulated — drawn from where the level originated to the moment it was taken.
Session liquidity .H / .L	The high and low of every completed 7h block as thin dotted lines, labelled with month/day and session: `10/1 ASIA.H`, `10/1 LON.L`, `10/1 NY.H`. Extended until price takes them; then kept (`↳ Preserve After Sweep`) or removed, and dropped a day after the sweep. They are rungs of the entries' TP ladder and feed the `◌ Session Liquidity Taken` passenger (section 4).
◑ NY / ◑ LON below a candle	A handover: from here the deciding session belongs to the other clock — the mark names the clock that takes over (`◑ NY`, `◑ LON` or `◑ ASIA`). The hover tooltip is the handover text, `🔄 Handover · New York reading now owns the decision session (its 08:00) · …` (section 13).
ϟ above or below a candle	A climax bar — above the candle at the day high, below it at the day low. The hover tooltip reads the candle against the 25 % and the projection and names its width in ATR, e.g. `⚡ · Climax at the 25% 26303.0 · counter-move exhausted, bias defended · 2.3× ATR (10m).` (section 3).

Zones

What you see	What it means
Daily FVGs (not drawn)	Fair value gaps from the daily chart are not drawn as boxes. They sit in the frameworks' level pool and behind the `+FVG` suffix of the confirmed extremes (section 6). A gap only dies once a complete day closes through it.
Two extra quarter lines intraday	The 210m signature quarters. When a completed 210m candle rejects the daily 25 % with a reversal signature, it gets its own 25 %/50 % marks — dashed lines labelled `210m 25%` and `210m 50%`. Following 210m candles are read against them: respect means continuation, a close against the signature removes the lines again.
◇ above or below a candle	A 210m signature just set its quarters — below the bar for a BULL signature, above it for a BEAR one, in that direction's entry colour (first clock's palette) — or a 210m close ran through the 210m 25 % and the quarters are gone (grey). The hover tooltip carries the same text as the ◇ alert line, e.g. `💠 · 210m Quarters Set · BULL · holds above 26298.0 · 50% 26292.0 · longs only · targets PDH +25% / +50%.` — the BEAR version reads `· BEAR · holds below … · shorts only · targets PDL −25% / −50%.` (section 11).
Soft grey boxes tagged `1H +FVG / 4H -FVG`	Higher-timeframe fair value gaps (HTF FVGs), + bullish, - bearish, extended past the last bar (`↳ Extension (Bars)`, 23). In `Automatic` mode two layers matched to the chart timeframe: up to 1m → 15m + 1H · up to 5m → 1H + 4H · up to 15m → 4H + 1D · up to 1H → 1D + 1W · above → 1W + 1M. `Manual` takes up to three timeframes of your choice. `↳ FVGs Displayed Per Side` (3) are drawn per side; a box goes when a chart close runs through its far edge.
The same boxes tagged `10/1 +NDOG / 9/29 +NWOG`	Opening gaps, labelled with the month/day of the open. NWOG is the gap from Friday's close to Sunday's open, NDOG the one from the previous close to the new day's open — on US index CFDs and futures from the 16:14 New York cash close to the 18:00 reopen, elsewhere the chart's session-day boundary. They stay until `↳ Gaps To Keep` (1 NWOG, 5 NDOG) pushes them out; with `↳ Remove On Close Through` they go like an FVG as soon as a close runs through.
Merged tags `4H -FVG · 10/1 +NDOG , 10/12 ASIA.H · 10/12 LON.H`	Tags that would print on top of each other share one row: gap boxes, and session levels on the same side, closer together than `Tag Row Merge (× ATR)` (0.5 ATR) are written on one line. Taken levels kept by `↳ Preserve After Sweep` share a tag too when they were taken on the same bar — the newest first, the tag at its price.
□ above or below a candle	The first tap into a gap: above the candle when price came down into the gap (↓), below it when it came up (↑). The hover tooltip names the edges touched, e.g. `1H +FVG ↓ 26310.0 · 10/1 +NDOG ↓ 26302.5`. One mark per gap until `↳ Re-Arm Each` re-arms it — every 7H (the default), every 210m or never. The marks belong to the `□ First Tap` switch in group 8 and are drawn while it is on.

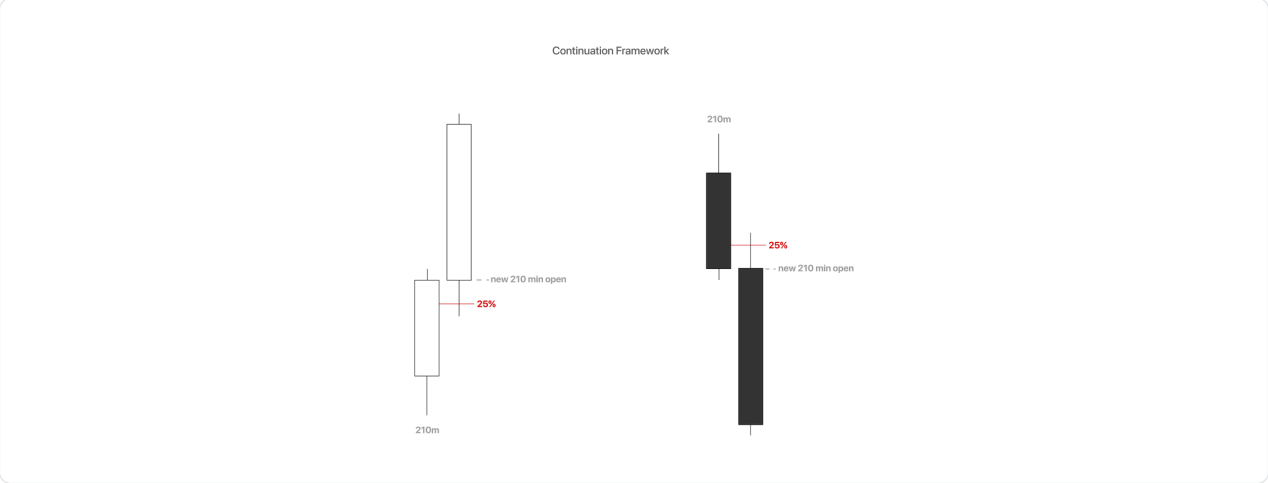


Fig. 1 **The 210m signature quarters in the picture:** the new 210m candle opens, runs into its predecessor's 25 % and continues — respect means continuation. Bullish on the left, bearish on the right. Only a 210m close through the quarter removes the lines again.

Entries

What you see	What it means
Equinox ◐ / ◑	The protected swing of an entry. Filled for long, mirrored for short. This is the point the stop sits behind. With `Colors` on `Theme` (the default) long and short are both drawn in the chart's ink, on both clocks — the glyph and its side of the candle tell them apart. On `Custom` they take `Entry Colors · 1st Session Clock` / `Entry Colors · 2nd Session Clock` (white for long, dark grey for short); to tell the two readings apart by colour, give the second clock its own pair.
Small label `PS · FVG+LQ→CISD`	Left of the arrow the qualifying events, right of it the trigger that fired. The hover tooltip carries the entry's read, its trade and its pro / contra, and once the trade has moved its fate on top — section 8 reads it line by line.
Two short thick stubs `TP1 2.66R` and `TP2 5.78R`	The first and second target on the liquidity ladder ahead of the entry (`TP At Nearest Liquidity`), each with its R, a few bars right of the entry. They stay where they were drawn, also after the trade.
Thick horizontal line at the entry	The CISD level — the open of the run that was reclaimed.
Dashed line	An LQ event: the swing point that was swept.
Dotted line between two extremes	An SMT event: the divergence against the correlated asset.
Small tinted box	An FVG event on the chart timeframe.
Short dotted line at a candle extreme	A C2 event: the extreme the C2 candle took, drawn from that candle to the event bar.
Dotted lines marked 0.5, 1, 2, 2.5 …	The target ladder: standard deviations of a structural range, measured from its midpoint. Everything lying ahead of you in the trade direction is drawn. `Targets` is either `Std Dev` or `Off` . Only the most recent entry keeps the ladder.

What you see	What it means
Short dotted grey line	The stop line (`Stop Line At Protected Swing`), from the protected swing — with a tight stop from the entry candle — to eight bars past the entry. Like the stubs it stays with the entry.
Dotted line, unlabelled, live	The pending CISD level: where the next CISD would print.
Bare ◐ / ◑ with nothing attached	The trace of a removed entry (`Trace Removed Entries`). The hover tooltip names the reason — 🛑 `Invalidated · closed through the protected swing 26295.9 · 02.10 10:12` or `× Pushed out · Entries To Keep · …` — followed by the entry's original tooltip.

> **NOTE** **Entries do not disappear at the end of the day**
>
> An entry stays on the chart until price closes through its protected swing. That can carry across the day boundary. Every entry keeps its short stop line and its TP1 / TP2 stubs, also once its trade is done, so you can read afterwards what it was aiming for. Only the Std Dev ladder belongs to the most recent entry alone: a new trigger takes it from the older ones — otherwise the chart would be unreadable after three days.

SECTION 6

06 Reading the status readout

The up to four lines at the bottom of the chart are the most compact summary of the day. An example, line by line:

→ Line 1 — bias, state and setup quality 19
→ Line 2 — framework and confirmed extremes 20
→ Line 3 — the other clock 20
→ Line 4 — ADR 21

```
▸ London · PD BULLISH · Bias BULL · 210m Intact · ✓ A+
7h F4 BULL · London Open Reversal · LOD London✓+SMT
New York · 7h F1 BEAR · London Expands
ADR 210.2 · 58% Filled
```

Whatever has nothing to say is left out: empty lines collapse. Without a second clock the third line is missing altogether, and the readout is correspondingly shorter; without ADR history the fourth goes as well.

Line	What it says
1 · bias	Previous day, bias, the state of the 25 % and the quality of the setup — for the reading on duty.
2 · framework	The 7h framework or profile of that reading, with the confirmed extremes of day.
3 · other clock	The framework of the reading that is not on duty, muted (only with a second clock).
4 · ADR	The ADR, today's fill and the ADR guard's tags.

Line 1 — bias, state and setup quality

Text	Meaning
`PD BULLISH · Bias BULL · 210m Intact · ✓ A+`	The 25 % is holding, checked on 210m closes, and has never been broken on a closing basis today. The strictest and rarest kind of day.
`… · Bias BULL · Intact · ✓ A+`	The same, checked on chart closes (`Validate With 210m Closes` off, or a timeframe that cannot build 210m candles).
`… · Bias BULL · 25% Reclaimed · A Framework`	Broken and reclaimed. Tradable, no longer A+.
`… · Bias BULL · 25% Closed Through · A Framework · Lower Prob`	Invalidated, with the reversal framework off. Lower probability. Reads `50% Closed Through` once the 50 % has gone too — then no reclaim is possible.
`PD BULLISH · BULL → BEAR · Reversal · Expecting Lower`	The reversal framework has flipped the working direction; the line replaces the state text. `Expecting Higher` on a flipped bear day.

Text	Meaning
`PD NEUTRAL · No Bias (Doji)`	No bias today.

The `▸ London ·` or `▸ New York ·` at the start of the line appears only with a second clock and `↳ Session Handover` switched on. It names the reading on duty — the clock whose bias, framework and entries apply right now (section 13). Without the handover the line stands as usual, with no prefix.

Line 2 — framework and confirmed extremes

First the framework with direction and expectation, for example `7h F2 BULL · London Opens Expanding`. Further building blocks:

Addition	Meaning
`(F1 ✗)`	A framework assigned earlier was disproven and discarded.
`· Opposes Bias`	The framework points against the working direction. Depending on the gate, entries stand down.
`7h · F4 BULL Developing · Unconfirmed`	A preview of the 08:00 210m candle that is still forming. It can still change and sets neither framework nor entry. `F4→` means: closed beyond the extreme, the deciding session continues.
`LOD London✓ / HOD Asia✓`	A confirmed extreme of day: a completed 210m candle swept a level, reclaimed it, and its extreme is still the extreme of the day. The session name follows the session clock (see section 4).
`+SMT`	The confirming sweep diverged from the correlated asset.
`+FVG`	The confirmed extreme printed inside an active daily FVG.
`7h · New York Forming`	No decision possible yet — the first block is running. The name changes with the session clock.
`7h · F2/F3 Developing`	The second block is running; F1 did not come.
`7h · Watching London (F4 · 8–11)`	No framework out of the overnight; now only the deciding session's sweep counts.
`7h · No Framework`	The F4 window has closed at 11:00 and the day has no framework.
`7h · Unsupported Chart TF (Use One Dividing 210m)`	The timeframe does not divide the 420 minutes — frameworks stand down (section 2).

Line 3 — the other clock

With a second clock running, the reading that is not on duty gets a line of its own: its framework, drawn muted and with the name of its clock in front. The grammar is the same as in line 2, just one clock further along:

```
New York · 7h P4B BEAR · New York Reverses · No Sweep
New York · 7h · F4 BULL Developing · Unconfirmed
New York · 7h · F1 ✗
New York · 7h · Yesterday F2 BULL
New York · 7h · No Framework Yet
```

A set framework, a preview, a discarded F1 — or, while the other clock's day has not produced anything yet, yesterday's framework or `No Framework Yet`. That way you can see at a glance whether both clocks read the same day or whether the second reading stands against the first before it takes over. Once New York is on duty, the line carries the first clock (`London · 7h …`). Without a second clock this line does not exist.

Line 4 — ADR

The average daily range of the last 14 days and how much of it today has used, as a whole percent: `ADR 210.2 · 58% Filled`. While fewer than 14 days of history are available it reads `ADR(9d)` with the actual count. The fill is measured over the exchange's calendar day — the same range the chart shows as a day; it is identical for both clocks, which is why this line carries no ▸ prefix.

If the ADR guard (section 7) has shut the door, the line says so at its end: `ADR 210.2 · 81% Filled · London Exhausted · New York Exhausted` — with a tag per clock, or just `· Exhausted` without a second clock. The market has then already worked through most of its usual range before the deciding session opened, and entries on that clock stand down. The guard is off by default, so the tags only appear once you switch it on.

SECTION 7

07 The 7h frameworks and profiles

This is where the indicator names what kind of day it is. There is only ever one framework per day — and per clock.

→ The four frameworks 22
→ The four profiles 22
→ Where the framework is shown 23
→ The entry gate 23
→ The ADR guard 23

The four frameworks

	What happens	Expectation	Decided
F1	Asia manipulates a valid level and closes back with rejection.	London expands away from the manipulation.	01:00
F2	London manipulates the Asia extreme and closes decisively back.	New York AM expands.	08:00
F3	London protracts all session into a level and closes near its own extreme.	New York reverses.	08:00, after F2
F4	New York sweeps a London extreme. The close of the sweeping candle decides the fork.	Closes back through: New York reverses. Closes beyond it (F4→): New York continues.	live, 08–11

UNDER THE HOOD **Why F1 is the only one that can be checked**

F1 predicts something about London — and London is over by 08:00. So equinox checks back at 08:00: if London closed against the direction, the read was wrong. The framework is cleared, `F1 ✗` stays in the status readout, and the day is re-read from the London data. F2, F3 and F4 predict something about New York and can be disproven during the AM phase too — namely when a close goes through their own level or through the opposite London extreme.

The table uses the names of the Asia → London → New York cycle. On another session clock the three blocks carry different names (section 4); the relations stay the same.

The four profiles

Some days do not manipulate at all — they simply run. The profiles cover those:

	What happens	Expectation
P1	Asia trends, London expands the same way.	New York continues.
P1B	Asia trends, London coils inside the Asia range.	New York continues anyway — the consolidation was pressure building.

	What happens	Expectation
P4	An aligned day, but New York spikes through the London extreme and closes back.	The alignment was bait. New York reverses.
P4B	Aligned day, New York flips via CISD without ever taking the London extreme.	New York reverses — the manipulation signal you normally wait for never comes.

Asia counts as trending when its candle body is at least half of the session range (adjustable via `↳ Trending-Session Body Fraction`). P1 and P1B are tested last: F2 and F3 take priority, because a manipulation is the more meaningful piece of information.

Where the framework is shown

In line 2 of the status readout — with name, direction and expectation, for example `7h F4 BULL · London Open Reversal`. When a second clock is running, its framework sits muted in line 3, with the name of its clock in front (section 6). In the alerts the framework of the clock on duty sits in the 🧭 day read of every message (`7h F2 BULL`); a new or re-classified framework that opposes the bias is also an alert of its own (`◈ 7h Framework Set`, section 11). Nothing else is written: there is no framework banner and no F tag on the price chart itself — only the thin line of the manipulated level, drawn from where the level originated to the moment it was taken.

The entry gate

Setting	Effect
`Off`	The framework is information only and does not affect entries.
`Block Opposing` **(default)**	If a framework points against the working direction, entries stand down. No framework? Entries run.
`Require Aligned`	Entries need an aligned framework. Strict — days without a framework never fire.

The ADR guard

At the end of the group sits the `ADR Exhaustion Guard` — logically not part of the framework, it stands entries down when there is simply no range left: if the overnight sessions have consumed the configured fraction of the 14-day ADR by 08:00 (`↳ Exhausted At (Fraction Of ADR)`, 0.75 by default), the day counts as exhausted. The guard is off by default; switch it on and you get the tag in the status readout and the ⛔ ADR passenger with it (`⛔ ADR 78% used · no entries`), which rides along with the next message (section 11). With `↳ Also Gate The 2nd Session Clock` (on by default) the guard also measures at the second clock's own 08:00 — which sits in the afternoon, when the morning has usually delivered already, so it gates the second clock's reading correspondingly often. The status readout tags each clock separately. The same fraction also sets the ⛔ in front of the ADR figure of the day read (section 11) — even with the guard switched off.

08

SECTION 8

Entries

An entry is not a single signal but a chain. Only when every link holds does an equinox mark appear on the chart.

→ The chain 24
→ The qualifying events 24
→ The triggers 24
→ The filters 25
→ The tooltip 26
→ The stop 27
→ The targets 28
→ TP1 and TP2: the liquidity ladder 28
→ The trade's fate 29

The chain

```
Working direction → Event → Trigger → Filters → Entry
                    (SMT/FVG/ (CISD/RC/    (time, TF,
                     LQ/C2)    EC/IRC/BO)   gates)
```

The order is what matters. The event must have happened before the trigger, and inside the run that is being reversed. A trigger out of nowhere does not count. Only the most recent event counts — it is the one that led to the trigger.

The qualifying events

	What it is
SMT	A swing point where this symbol and a correlated asset disagree — one makes the lower low, the other does not. The pair is resolved automatically from the correlation library.
FVG	Price traded back into a fair value gap on the chart timeframe.
LQ	Price swept a swing point on the chart timeframe.
C2	A candle that takes the previous candle's extreme, closes back inside it, and closes beyond its own wick-weighted midpoint.

The triggers

	What it is
CISD	Change in State of Delivery. Price closes back through the open of the opposing run. The strongest trigger — it always needs an event before it.
RC	Takes the last confirmed swing point and closes back through it.
EC	Takes the previous candle's low or high and closes beyond its open — and beyond the previous candle's 50 % mark.

	What it is
IRC	Closes beyond the previous candle's 50 % mark without meeting the EC condition. The weakest of the three.
BO	Breakout. The first close through an extreme of the 8–9 range in the working direction. The only trigger that needs no prior event — it is a continuation, not a reversal. The stop sits on the opposite side of the range.

By default the RC/EC/IRC signatures also require an event before them (`Signatures Require Event Gate`). Switch that gate off and a bias-aligned signature alone is enough — noticeably noisier, especially the IRC.




Fig. 1 **The anatomy of a trigger:** the run down sweeps the low (the event — LQ or C2), then the white candle closes back through the down-run's open — the CISD. Event first, trigger after, inside the same run.

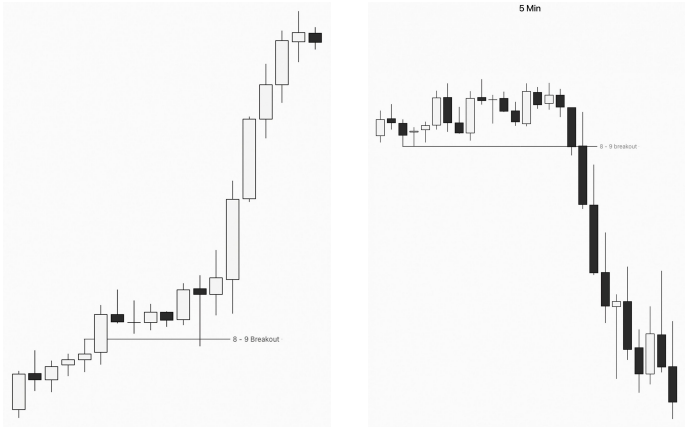


Fig. 2 **The breakout on the entry timeframe:** left the long — the first 5m close through the 8–9 high in the working direction, stop at the opposite side of the range, expecting the 09:30 expansion. Right the short mirror through the 8–9 low.

The filters


Filter	Default	What it does
`Entry Window`	0900-1030, on	Nothing fires outside it. With a second clock the window applies on each clock's own time — 09:00–10:30 Berlin and 09:00–10:30 New York. Several ranges go into the session field separated by a comma (`0900-1030,1530-1700`); with the window off, entries fire at any time of day.

Filter	Default	What it does
↳ Max Entry Timeframe	15m	On higher charts entries stand down; the bias keeps running.
Strong-Close Filter	on	The trigger must close in the outer quarter of its own candle range.
One Entry Per Day	on	Only the first qualified trigger. If its swing is closed through, it re-arms.
↳ Entry Bias Gate	Working Direction	A+ Only = only days never broken. Working Direction = whatever the day currently is. Any Non-Doji Day = every day with a bias, even with the 25 % broken.
↳ Event Max Age (Chart Bars)	40 bars	An event that is too old no longer qualifies a trigger.
ADR guard	off, 0.75	Switched on: if the configured fraction of the daily range is used up by 08:00, entries stand down (section 7).
7h gate	Block Opposing	See section 7.
Climax gate	↳ Block Entries Into A Live Climax, on	No entry in the direction of a live climax — no longs into a climax at the day high, no shorts into one at the day low. An entry against it remains allowed (see section 3).

Not a filter but a look back: with Trace Removed Entries (on), wherever an entry was removed a bare ◐ / ◑ stays behind. Its hover tooltip names the reason — 🛑 Invalidated · closed through the protected swing 26295.9 · 02.10 10:12 or ✕ Pushed out · Entries To Keep · … — and beneath it the original tooltip. Together with the live markers that shows every trigger the current settings would have produced — rejected triggers leave nothing.

The tooltip

Every entry carries a small label, PS · FVG+LQ→RC — the events left of the arrow, the trigger right of it. Hover over it and the entry's tooltip opens, built like the entry alert (section 11). A real one, from a long on the London clock that has since reached TP1:

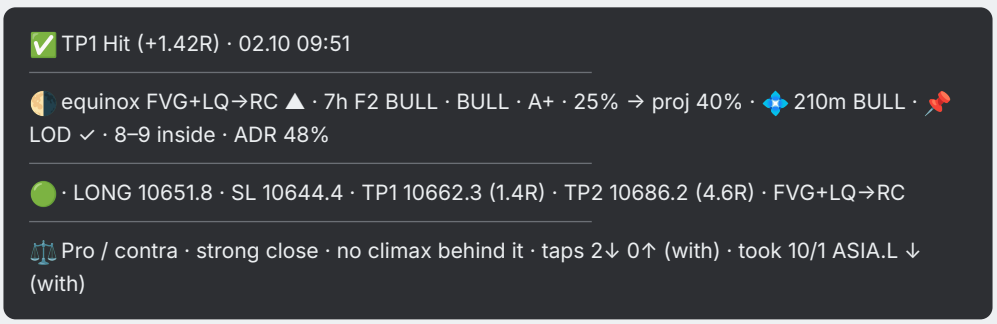

Four parts, from the top:

- **The fate.** Once the trade has moved, how it went sits on top: ✅ `TP1 Hit`, 🏆 `TP2 Hit`, 🏁 `Runner Closed` or 🛑 `Stopped`, with its R and the time (`dd.MM HH:mm`, on the `Display Time Zone`). A later fate replaces the earlier one; a trade that expires adds nothing. Only the latest entry is followed (see below), so an older entry keeps the last fate it had.
- **The read.** 🌓 equinox, the events → the trigger, the arrow, the framework of the entry's own clock — then the day read of the reading on duty, field for field as in the alert's 🧭 line: direction and state, the way to the projection, 💠 quarters, 📌 confirmed extreme, 8–9, ADR (section 11).
- **The trade.** 🟢 for long, 🔴 for short, direction and price — the trigger close —, `SL` the stop in the chosen mode, then `TP1` and `TP2` with their R, to one decimal, and the setup once more. A target appears only when the liquidity ladder has a level for it (see below). The distance between entry and stop is the risk, which is what one R measures.
- ⚖️ **Pro / contra.** The facts that stood behind the trigger, each marked `(with)` or `(against)` where it takes a side:

Fact	Means
`strong close` · `weak close (against)`	Whether the trigger candle closed in the outer quarter of its range. With the `Strong-Close Filter` on, as by default, every entry has a strong close.
`HTF PDA delivered`	The move came out of an HTF FVG that was tapped inside the event window (section 5). Missing when it did not.
`swing 10640.2`	Only with a tight stop (`Trigger Candle (Tight)`): where the protected swing sits, the level that removes the drawing.
`climax behind it (with)` · `no climax behind it`	Whether the entry comes out of a live climax at the opposite extreme — a long after a climax at the day low, a short after one at the day high (section 3).
`taps 2↓ 0↑ (with)`	The first taps into gaps in the running 7h block, the same count as the 👉 gauge of the day read: `(with)` when more came from the side that backs the trade (↓ for a long, ↑ for a short), `(against)` when more came from the other, no tag when they are even. Missing at 0.
`took 10/1 ASIA.L ↓ (with)`	Every session level taken since the last message, one fact each: a low taken (↓) backs a long, a high taken (↑) backs a short.

> **NOTE** **Pro / contra does not filter**
>
> An entry prints as soon as the chain holds — working direction, event, trigger, filters. The pro / contra drops nothing and holds nothing back; it shows what else stood behind the entry. An entry with three facts against it is a valid entry, just a thin one. The entry alert carries the same read, trade and pro / contra (section 11).

The stop

The protected swing is the point the trigger delivered off — for a CISD the extreme of the reversed run, for a signature the most recent extreme of the run, for a breakout the opposite side of the 8–9 range. That is where the equinox mark sits.

Stop mode	Where the stop sits
`Protected Swing`	Beyond the protected swing. The wider, safer stop.
`Trigger Candle (Tight)`	At the trigger candle's own extreme. Tighter — the thinking: anything that runs 75 % back into the trigger candle usually runs the whole swing anyway, so the smaller loss is the better one.

For the invalidation check — removing the drawing — the protected swing always applies, whichever stop mode you picked.

The targets

`Targets` (group 4 · Entry Targets & Display) has two positions: `Std Dev` or `Off`. What the trade is worth relative to its risk is told by the R of TP1 and TP2 (see below); the Std Dev ladder answers the other question — where price might actually go.

The ladder measures multiples of a structural range from that range's midpoint, so 0.5 lands exactly on its edge — the same scheme and the same numbering as the macro indicator, so a 2.5 means the same thing on both.

Std Dev Basis	What it measures in
`Entry Leg` **(default)**	Protected swing to trigger close, with the full ladder on top. Measured against the swing, not the stop — a tight stop changes your risk, not the structure.
`8–9 Range`	High and low of the 08:00–09:00 hour — the structure the entry window sits inside anyway, and the widest of the three.
`210m Candle`	The running 210-minute candle, so the unit grows with the session.

Only what lies ahead of the entry in the trade direction is drawn — from the ladder 0.5 / 1 / 2 / 2.5 / 3 / 4 / 4.5 / 7 / 9. With a wide basis that can include the lower half of the grid: for a long entry sitting deep in the 8–9 range, -1 and -0.5 are still targets above you. If the entry sits outside the chosen basis's grid, or the basis has not formed yet, the ladder falls back to the entry leg. ↳ `Std Dev Levels` caps the ladder, at 4.5 by default; `Custom` takes your own comma list.

TP1 and TP2: the liquidity ladder

Independently of the Std Dev ladder, equinox looks for liquidity ahead of every entry in the trade direction and picks two targets from it. That is the target the model expects anyway: the expansion runs into the liquidity on the other side. The pool, on the trade side of the entry:

- the high and low of the 8–9 range — the most recent one of each clock;
- the previous day's high (long) or low (short), as long as the day has not traded beyond it;
- the previous week's high or low, if not yet taken;
- every untaken session liquidity level (.H / .L, section 4) — also when their lines are hidden;
- the near edge of every HTF FVG and opening gap on the chart: the lower edge for a long, the upper edge for a short.

The previous month's high and low are not in the pool. R is the distance between entry and stop. **TP1** is the nearest pool level at least 1R away from the entry close; **TP2** is the nearest level at least 1R beyond TP1. If the ladder has no such level, that target stays empty — it is missing from the tooltip's trade line and from the alert.


With `TP At Nearest Liquidity` (on by default) both are drawn as short thick stubs right of the entry, labelled `TP1  2.66R` and `TP2  5.78R`. Every entry keeps its stubs, also after the trade. The switch only concerns the stubs: TP1 and TP2 are worked out for every entry anyway and go into the tooltip's trade line, into the trade's tracking (below) and, with `↳ Append TP To Entries` (on by default), into the entry alert: `· TP1 26320.0 (2.7R) · TP2 26340.0 (5.8R)` — R to one decimal in the alert and the tooltip, to two on the stubs.

The trade's fate

From the bar after the entry, equinox follows the latest entry — whichever clock fired it — on confirmed bars and reports what becomes of it. The trade is managed in two halves, built in and without a setting: half comes off at TP1, the stop moves to the entry, and the rest runs on to TP2 as the runner.

Fate	When	Message
Stopped	A close through the stop before TP1. The exit is that close, so the loss is usually a little more than 1R.	🛑 · LONG 26303.0 Stopped at 26294.8 (-1.28R) · SL 26296.6.
TP1	A touch of TP1. Half is out, the stop now sits at the entry.	✅ · LONG 26303.0 TP1 Hit 26320.0 (+2.66R).
TP2	A touch of TP2 — also without a TP1 message first, if both come on the same bar.	🏆 · LONG 26303.0 TP2 Hit 26340.0 (+5.78R).
Runner closed	After TP1, a close back through the entry (`break-even`) or the day open (`day end` , at the day's last close).	🏁 · LONG 26303.0 Runner Closed 26303.0 (+0R) · break-even.

Every result carries its R: the exit price against the entry, measured in the original risk (entry to stop). The trade as a whole is half of the TP1 figure plus half of the runner's — TP2, or the price the runner closed at. On the same bar a close through the stop beats a TP1 touch, and a TP2 touch beats everything else. A newer entry takes over the tracking, and at the day open a trade that never reached TP1 simply expires, without a message. Each fate also goes on top of the entry's tooltip (`✅ TP1 Hit (+2.66R) · 02.10 10:21`). The fates go out as messages of their own while ▲ or ▼ is switched on (section 11):

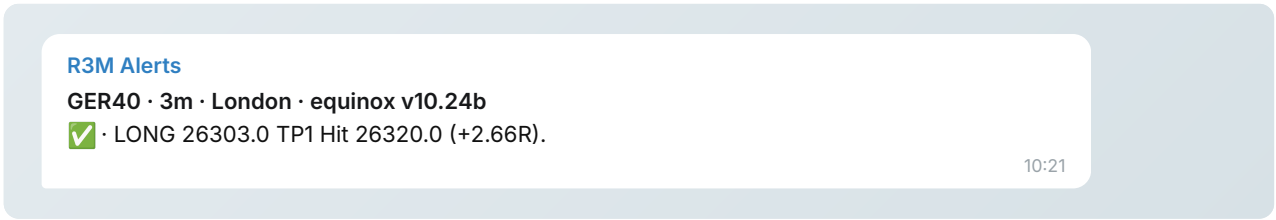

The chart drawing keeps its own rule: it is removed only on a close through the protected swing. With `↳ Stop Placement` on `Trigger Candle (Tight)` a trade can therefore be reported stopped while its mark stays on the chart.

SECTION 9

09 The mini-panels and SMT

Up to three small candle panels float to the right of price, starting `Panel Distance (Bars)` (25) bars right of the last bar. They show the same day at the three resolutions the model thinks in — they are on by default and switched off in group 7.

→ Panel SMT 31
→ Where the correlated assets come from 32

Panel	Contents
1H	The last eight hourly candles.
210m	Every 210-minute candle of the current day.
7H	The three seven-hour blocks, tagged with the initial of the session that falls there on your clock.

Each panel carries a dotted line on the daily 25 %, so you can see at a glance how every resolution stands relative to that level. Sweep lines are drawn as well: if a candle took the extreme of the one before it and re-claimed it, the level is marked. A close through the level is not a sweep but expansion — then nothing is drawn. If the extreme is later exceeded after all, the line disappears again.

With `Panel 25% Quarters` (on by default), equinox also hangs the 25 % of the candle before it beside every panel candle — measured like the daily level, from the close toward the opposite extreme, just one resolution lower. That is the stacking from section 3 applied fractally: as long as each candle respects the quarter of the one before, the chain stands; a close through it is the break. The short solid tick in the level colour belongs to that previous candle — the dotted line across the whole panel remains the daily 25 %. A doji leaves no quarter, and the freshest tick is read against a candle that is still open, so it may flicker like the SMT lines.

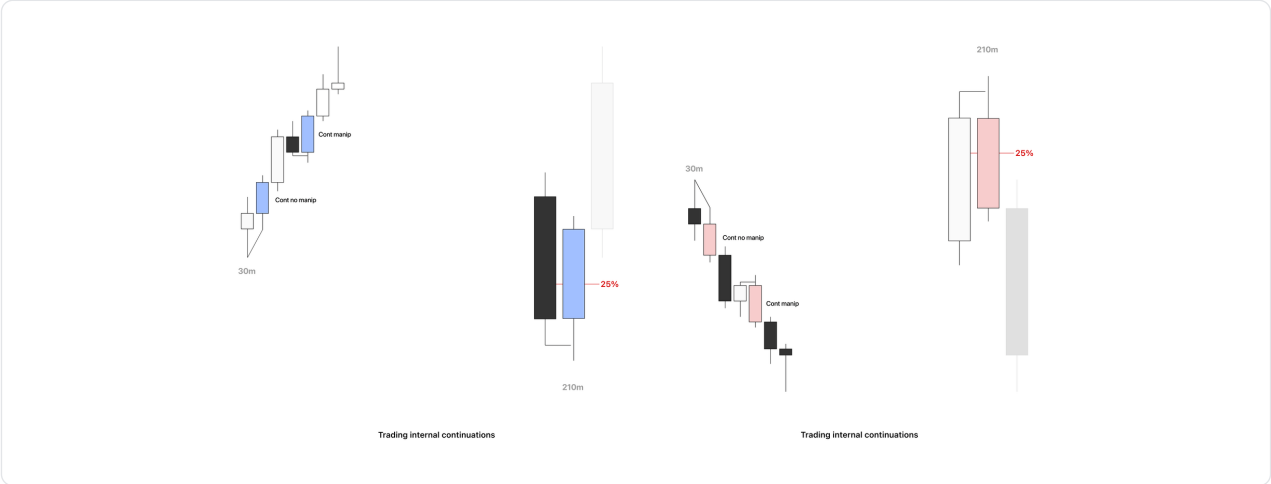


Fig. 1 **The stacking seen from inside:** on the 30m the continuation runs either without manipulation (cont no manip) or with it — a short dip under the previous candle, then the close above (cont manip). On the 210m both are the same candle: it taps its predecessor's quarter and closes in direction. Bullish above, bearish below.

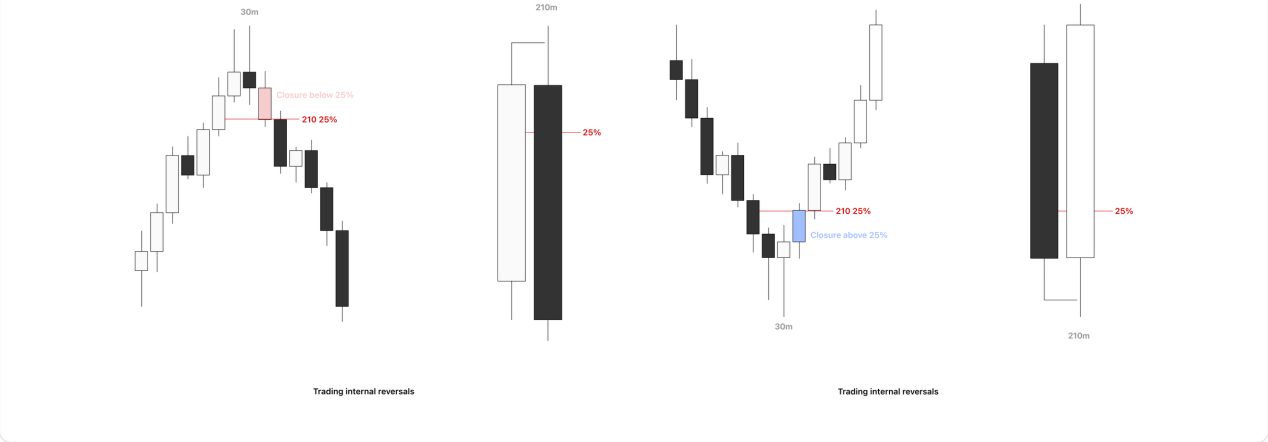


Fig. 2 **And when the chain breaks:** a 30m close through the 25 % of the running 210m candle (pink or blue) is the internal reversal — on the 210m it becomes the candle that no longer respects its predecessor's quarter. That is exactly what the short tick in the panel shows before the 210m candle is complete.

Panel SMT

With the option enabled (`Panel SMT Lines` , on by default), equinox compares the newest candle pair of each panel against the correlated assets. If your symbol makes the lower low and the other does not, a line is drawn between the two extremes with the asset named beside it.

> **NOTE** **An SMT line is allowed to flicker**
>
> The newest candle in the panel is not finished. A divergence can therefore appear and disappear until the candle closes. That is not a fault — it is the honest state of a candle that is still open.

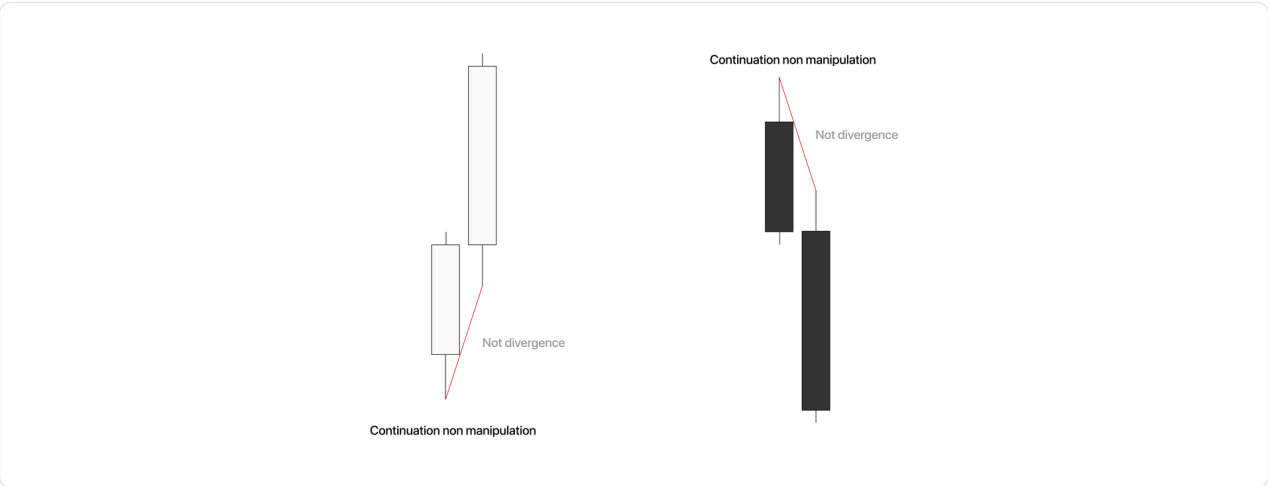


Fig. 3 **No manipulation, no divergence:** a continuation candle that never touches its predecessor's extreme leaves nothing to compare — the red line stays steep, there is nothing the two assets could disagree on. Panel SMT only appears where an extreme is taken. Bullish on the left, bearish on the right.

Where the correlated assets come from

The pair is derived automatically from the chart symbol: index futures, metals, forex, energy and treasuries are all covered. Inversely correlated pairs are mirrored internally so that “higher high” keeps its meaning for them too. Under Entries (group 3) you can override both symbols manually — `↳ SMT Asset 1 (Auto Pairing)` and `↳ SMT Asset 2 (Auto Pairing)`, blank means automatic — and two more dials sit there:

- `↳ SMT Symbol Source` (Auto/Normal/Pepper): on a Pepperstone chart, `Auto` resolves the legs as Pepperstone CFDs, otherwise as futures/standard symbols. The two fixed modes force one source. Manual symbols always win.
- `↳ Fallback: S&P 500` (on): when the library knows no pairing for your symbol, asset 1 falls back to the S&P 500 as the broad risk proxy — mostly relevant on single stocks and exotic indices. Mind assets that trade against equities (bonds, VIX-likes): set a manual symbol there instead. Off: no SMT on unknown symbols.

SECTION 10

10 The settings

Eight groups, numbered in the order the model runs. To begin with it is enough to leave the defaults alone — this chapter tells you where to reach later. Labels are quoted as they appear in the settings dialog; ↳ marks a sub-setting, which is greyed out while its parent is off.

→ 1 · Daily Bias 33
→ 2 · 7h Frameworks & Profiles 33
→ 3 · Entries 34
→ 4 · Entry Targets & Display 35
→ 5 · Levels & Zones 36
→ 6 · Sessions & Clocks 37
→ 7 · Visuals & Status 37
→ 8 · Alerts 38
→ Five settings that really change things 39

1 · Daily Bias

How strictly the 25 % is tested, whether a break flips the direction — and the climax. To start: leave alone.

Setting	Default	What it does
`Validate With 210m Closes`	on	Only a completed 210m close through the 25 % invalidates. Off: any chart close.
`Overnight Candles Only (18:00–08:00)`	on	Only the overnight candles may invalidate; from 08:00 the bias is locked for the deciding session.
`Reversal Framework On 25% Break`	on	A close through the 25 % flips direction, projections and entries; a close back through un-flips it if the 50 % held (section 3). Off: a broken 25 % stops the entries under the default `↳ Entry Bias Gate`.
`ϟ Climax`	on	Marks climax bars and reads them against the day's levels (section 3).
`↳ Climax Bar (× ATR)`	2.0	Minimum width of a climax bar in ATR(14) of the climax timeframe (1–6).
`↳ Climax Timeframe`	MTF	The candle the climax is read on: `Chart`, `Auto` (matched to the chart), `MTF` (Auto and the step below, 3m and 5m: 10m + 5m · 10m: 15m + 10m) or a fixed 1m … 1W (section 3).
`↳ Block Entries Into A Live Climax`	on	No entry in the direction of a live climax. Off: mark, alert tag and pro / contra fact only.

2 · 7h Frameworks & Profiles

Framework detection, the fractions for F3 and the profiles, the level pool, the entry gate and the ADR guard. To start: at most the gate.

Setting	Default	What it does
`Detect 7h Frameworks`	on	Classifies the day on the 18:00 / 01:00 / 08:00 grid of the chosen clock (F1–F4, P1–P4B, section 7). Off: no framework line and no framework gate.
`Confirm Frameworks On 210m Closes`	on	Decisions in the deciding block — the F4 fork, F2/F3 invalidation — resolve on completed 210m candles instead of chart closes. Falls back to chart closes if the timeframe cannot build 210m.
`PWH/PWL` · `PMH/PML`	on · on	Add the untaken previous-week and previous-month highs and lows to the frameworks' level pool. PD extremes and daily swings are always in.
↳ `Protraction / Reversal Fraction`	0.25	Fraction of the second block's range. F3: a close within it of the extreme counts as protraction. F2: the close must sit at least this far away from the swept extreme.
↳ `Trending-Session Body Fraction`	0.5	The first block counts as trending when its body is at least this fraction of its range (P1 / P1B).
↳ `FVG Min Size · Daily & HTF (Ticks)`	4	Minimum size of daily FVGs (framework levels) and of the HTF FVGs drawn on the chart. Smaller gaps are ignored.
↳ `Entry Gate`	Block Opposing	`Off` · `Block Opposing` · `Require Aligned` (section 7).
`ADR Exhaustion Guard`	off	No entries on a clock whose overnight already used the set fraction of the ADR by its 08:00 (section 7).
↳ `Exhausted At (Fraction Of ADR)`	0.75	The guard's threshold (0.3–1.5). Also sets the ⛔ of the day read — with the guard on or off.
↳ `Also Gate The 2nd Session Clock`	on	Applies the guard at the second clock's own 08:00 too. Off: first clock only.

3 · Entries

Triggers, events, SMT symbols, filters, the single `Entry Window`, stop mode. To start: time window and max timeframe.

Setting	Default	What it does
`Enable Entries`	on	The entry engine as a whole. Off: no entries, no fates; bias, frameworks and levels keep running.
`CISD` · `Signatures` · `Breakout`	on · on · on	The three trigger families (section 8).
`RC` · `EC` · `IRC`	on · on · on	The three reversal signatures; they need `Signatures` on.
`Signatures Require Event Gate`	on	Signatures need a qualifying event, like a CISD. Off: a bias-aligned signature alone fires (noisier).
`SMT` · `FVG` · `LQ` · `C2`	on	The qualifying events; the most recent one counts.
↳ `SMT Asset 1 (Auto Pairing)`	blank	Blank: automatic pairing by chart symbol. Also used by the panel SMT lines.

Setting	Default	What it does
↳ SMT Asset 2 (Auto Pairing)	blank	The second correlated asset, blank for automatic.
↳ SMT Symbol Source	Auto	Auto (Pepperstone legs on Pepperstone charts, otherwise futures/CFDs) · Normal · Pepper.
↳ Fallback: S&P 500	on	Unknown symbol: the S&P 500 becomes asset 1. Off: no SMT on unknown symbols.
Strong-Close Filter	on	The trigger must close in the outer 25 % of its own range.
One Entry Per Day	on	One entry per day and clock; re-arms if its protected swing is closed through.
↳ Entry Bias Gate	Working Direction	A+ Only · Working Direction · Any Non-Doji Day (section 8).
↳ Max Entry Timeframe	15m	No entries above this chart timeframe.
↳ Event Max Age (Chart Bars)	40	Events older than this cannot qualify a trigger (5–200).
Entry Window + session	on · 0900-1030	Entries only inside this window, on each clock's own time. Several ranges separated by a comma. Off: any time.
↳ Stop Placement	Protected Swing	Protected Swing · Trigger Candle (Tight) (section 8).

4 · Entry Targets & Display

What is drawn of an entry. Never changes which entries exist — only what is shown of them. To start: to taste.

Setting	Default	What it does
Targets	Std Dev	Std Dev draws the ladder of the latest entry; Off hides it.
↳ Std Dev Basis	Entry Leg	8–9 Range · Entry Leg · 210m Candle (section 8).
↳ Std Dev Levels	4.5	Draw the ladder up to this value: Full · 1.0 · 2.5 · 4.5 · Custom.
↳ Custom Std Devs (e.g. 0.5,1,1.5)	blank	Your own comma list, used with Custom.
Std Dev Labels	on	The numbers beside the ladder lines.
TP At Nearest Liquidity	on	The TP1 / TP2 stubs of every entry; they stay after the trade. TP1 and TP2 are worked out either way (tooltip, alert, fate).
Stop Line At Protected Swing	on	The short dotted stop line of every entry, at the stop of the chosen mode; it stays after the trade.
Pending CISD Level	on	The dotted live level where the next CISD would print.
Entry Labels	on	The PS · event→trigger tag. Off: the bare ◐ / ◑ carries the tooltip. Mark, stop and targets draw anyway.

Setting	Default	What it does
`Trace Removed Entries`	on	Leaves a bare ◐ / ◑ where an entry was removed; hover for why and when.
`↳ Entries To Keep`	20	Entries kept on the chart per clock (1–50); the oldest drops first.
`Entry Colors · 1st Session Clock`	white · dark grey	Bull / bear colour of the first clock's entries, also used for the ◇ marks, the panel SMT and the coloured readout lines. Used with `Colors` on `Custom`; on `Theme` both are the chart's ink.
`Entry Colors · 2nd Session Clock`	white · dark grey	Its own pair for the second clock's entries — set it to tell the readings apart (`Custom` only).

5 · Levels & Zones

Which lines and zones are drawn. To start: to taste.

Setting	Default	What it does
`25% / 50% Levels`	on	The two invalidation levels.
`Projections (PDH / PDL ± 25% & 50%)`	on	The dotted projections in the working direction.
`Day & 00:00 Open Lines`	on	The day open and the midnight open.
`210m Signature Quarters`	on	The ◇ quarters of a 210m signature (section 5). Also needed for the 💠 field of the day read and for the ◇ alert.
`HTF FVGs`	on	Higher-timeframe fair value gaps as boxes; their near edges are rungs of the TP ladder.
`↳ FVGs Displayed Per Side`	3	Boxes kept per side and timeframe (1–10).
`↳ HTF Timeframe Mode`	Automatic	`Automatic`: two layers matched to the chart (section 5). `Manual`: your own.
`↳ Manual HTF Count`	3	How many manual timeframes are used (1–3).
`↳ TF 1 · 2`	1H · 4H	The first two manual timeframes.
`↳ TF 3`	1D	The third manual timeframe.
`↳ Bullish / Bearish Fill`	grey, 88 % transparent	Fill colours of the boxes with `Colors` on `Custom`. On `Theme` the chart's ink at 97 % transparency.
`Opening Gaps`	on	NWOG / NDOG boxes, drawn like the HTF FVGs (tags, ☐ taps, tag rows).
`↳ NWOG · NDOG`	on · on	Which of the two are drawn.
`↳ Gaps To Keep · NWOG`	1	How many week gaps stay (1–50).
`↳ Gaps To Keep · NDOG`	5	How many day gaps stay (1–50).
`↳ Extension (Bars)`	23	How far the boxes reach past the last bar.

Setting	Default	What it does
↳ Remove On Close Through	off	Removes an opening gap once a close runs through it, like an FVG. Off: gaps stay until the count pushes them out.

6 · Sessions & Clocks

The session clock, the second reading and what is drawn of the grid. To start: leave the clock on London unless you trade the US or Asian open.

Setting	Default	What it does
First Session Clock	London	London · New York · Asia : the session whose 08:00–15:00 is the deciding block. Shifts the whole grid (section 12).
Second Session Clock (Next In Cycle)	on	Runs the model a second time on the next clock in the cycle, with its own bias, framework, 8–9 range and entries (section 13).
↳ Session Handover	on	From the second clock's 08:00 to its 18:00 only that reading fires entries and drives the readout (▶). Off: both run side by side.
Session Shading (1st & 2nd 7h Block)	off	Grey areas for the first two blocks, labelled with their session.
Session Dividers (18:00 / 01:00 / 08:00)	on	Vertical lines at the block boundaries.
8–9 Range (→ 10:30 Cutoff)	on	The 8–9 lines of each clock. The range is measured either way.
Session Liquidity (.H / .L)	on	High and low of every completed 7h block, extended until taken. The levels stay in the TP ladder when switched off.
Asia · London · New York	on · on · on	Which sessions are drawn and reported (◌).
↳ Preserve After Sweep	on	Keep a taken level on the chart (until a day after the sweep). Off: removed on the sweep.

7 · Visuals & Status

Panels, readout, fonts, colours. To start: on a 4K screen set Font Size to +1 or +2.

Setting	Default	What it does
Display Time Zone	Europe/ Berlin	The zone of every time equinox writes: labels, tooltips, the readout, alerts and their header. Pine cannot read the chart's time zone, so set it here as an IANA name, such as America/New_York or UTC . Only the display: the sessions, the 7h blocks, the 8–9, the 210m candles and the entry window keep their own clocks, so the signals are the same for everyone.
1H · 210m · 7H	on · on · on	The three mini-panels right of price (section 9).
Panel SMT Lines	on	SMT between the newest two candles of each panel and a correlated asset. Live until the candle closes.

Setting	Default	What it does
`Panel 25% Quarters`	on	A tick at the previous candle's 25 % beside each panel candle.
`Panel Distance (Bars)`	25	How many bars right of the last bar the mini-panels start.
`Status Readout` + position	on · Bottom Center	The readout of section 6, at `Bottom Left` , `Bottom Center` or `Bottom Right` .
`↳ At The 25% · Within (× ATR)`	0.5	How close to the 25 %, in ATR(14), the day read writes `at 25%` (0.1–3). Keep it equal to the screener's `At The 25% · Within (× ATR)` .
`Keep Previous Days' Drawings`	on	Keeps earlier days' lines on the chart.
`Monospace Font`	on	Fixed-width font for labels and readout, so digits line up.
`Font Size`	Default	Shifts all text sizes: `-2` … `+3` .
`Tag Row Merge (× ATR)`	0.5	Gap tags and session-level tags closer than this share one row (0 = only identical prices); taken levels only when taken on the same bar.
`Levels · Projection`	dark grey · grey	Colours of the 25 %/50 % levels and the projections with `Colors` on `Custom` . On `Theme` the chart's ink at 25 % and 40 % transparency.
`Panel Candles`	white · black · black	Bull body, bear body, outline of the panel candles. On `Theme` the two bodies stay as set; outline and wicks turn white on a dark chart and black on a light one.
`Colors`	Theme	`Theme` : every colour follows the chart theme — long and short entries both in full ink, levels at 25 %, projections at 40 %, gap fills at 97 % transparency, the panel outline by the background. `Custom` : the colour fields of all groups.

8 · Alerts

Which events go into the alert() message, which send and which ride along, and the format. Section 11 explains all of it.

Setting	Default	What it does
`Prefix Symbol & Timeframe`	on	Plain Text: puts `GER40 · 3m · London · equinox v10.24b` in front of the message. Telegram always has it.
`◑ New Bull Bias` · `◑ New Bear Bias`	on · on	The new day's bias with its 25 %, as a passenger (🌅).
`◈ 7h Framework Set`	off	A framework or profile assigned or re-classified that opposes the bias — a driver (🧭). One that agrees sends nothing; the framework on duty is in every 🧭 day read anyway, switch on or off.
`◐◐ Handover`	on	The decision session changes reading — a passenger (🔄). Needs a second clock; with the handover off only on disagreement.
`◇ 210m Quarters` · `⊘ ADR Exhausted`	off · on	210m quarters set or invalidated — a driver (💠). The ADR guard latched — a passenger (⛔), needs the guard.

Setting	Default	What it does
`▲ · ▼ Protected Swing Entry`	on · on	Long / short entries — drivers (🟢 🔴), both clocks. While either is on, the trade fates (🛑 ✅ 🏆 🏁) are sent too.
`↳ Append TP To Entries`	on	Appends TP1 and TP2 with their R to the entry line.
`↳ SMT Alone Only`	off	Only entries whose single qualifier is SMT (no FVG, LQ or C2) send, and only their results — for a watchlist alert next to eqx·screener· (section 11).
`◌ Session Liquidity Taken`	on	Session highs / lows taken — a passenger (✂️).
`□ First Tap · ▭ New Opening Gap`	on · on	First taps into HTF FVGs and opening gaps — the 👉 gauge in the day read, no message of their own —; new NWOG / NDOG (🕳️) — a passenger. The □ marks on the chart are drawn while `□ First Tap` is on.
`↳ Re-Arm Each`	7H	When a gap can report its first tap again: `7H` · `210m` · `Never`.
`↳ Climax`	on	Climax bars — a passenger (⚡).
`Passengers Ride Along`	on	Passengers collect and ride at the end of the next driver's day read. Off: each bar's passengers go out on their own.
`↳ Ride With`	Entries	`Entries` (▲ ▼ only: with ◈ and ◇ off, as by default, only entries and their results speak, and the 🧭 line still names the framework on duty and the 210m quarters) or `Every Driver` (opposing frameworks, 210m quarters, entries).
`↳ Max Age (Bars)`	60	A passenger kind that received nothing for this many bars is dropped unsent (5–500).
`Fire`	Once Per Bar Close	`Once Per Bar Close` (confirmed) or `Once Per Bar` (faster, a live bar can change its mind).
`Message Format`	Telegram	`Telegram` (Bot API JSON) or `Plain Text`.
`↳ Telegram Chat ID`	pre-filled	The chat the message goes to (`-100…` for channels). The field comes pre-filled — replace it with your own chat ID.

TIP **Dark chart theme?**

With `Colors` on `Theme`, the default, the chart follows its background by itself, panels included: the panel bodies stay white and black, their outline and wicks turn white on a dark chart. Only on `Custom` do the colour fields apply as set — there the panel candles are made for a light chart (white bulls, black bears, black outline); on a dark background invert the three colours under `Panel Candles`, or the candles disappear.

Five settings that really change things

Setting	What happens when you change it
`↳ Protraction / Reversal Fraction` **(0.25)**	Too loose: nearly every day becomes F3. Too strict: F3 never fires. This one number drives F3 and the quality check on F1 and F2.

Setting	What happens when you change it
`Entry Window` **(0900-1030)**	The one window. Switching it off multiplies the entries — and the false signals. With a second clock it already covers the afternoon, because there it applies on that clock's time: 09:00–10:30 New York is 15:00–16:30 Berlin time.
`↳ Entry Bias Gate`	Moving from `Working Direction` to `A+ Only` cuts the number of days sharply. That is a decision about your trading frequency, not a fine adjustment.
`↳ Block Entries Into A Live Climax` **(on)**	On: a live climax vetoes entries in its direction — until the day ends or a close runs through its extreme. Nine of ten climax bars are retraced the same day. Off: the climax is only shown; mark, alert tag and pro / contra fact stay, nothing is blocked.
`↳ FVG Min Size · Daily & HTF (Ticks)` **(4)**	Decides which daily gaps count as framework levels — and also which HTF FVGs are drawn and become TP rungs. Has to be set per instrument — 4 ticks means something different on the DAX than on gold.

SECTION 11

11 Setting up alerts

equinox reports every one of its events through a single alert — straight to Telegram if you like. Every message opens with the day read, one line that tells you where the day stands, before it tells you what just happened.

→ How to do it 41
→ The drivers 41
→ The passengers 42
→ What a message contains 43
→ Emojis in the messages 45
→ The options 46
→ Message format: Plain Text or Telegram 46

How to do it

1. **Right-click the chart → Add alert.**
2. **Pick equinox as the condition.**
3. **Below it choose “Any alert() function call”.**
4. **Save. Done.**

That is the only way — equinox has no named conditions, everything goes through this one alert() call. Under 8 · Alerts you tick which events should report. Every message is built the same way: the day read (🧭) on top, with the passengers that have collected appended to the same line, then, after a blank line, the events, separated by blank lines — an entry takes three of them: headline, trade line, pro / contra. The trade fates go out on their own, without the 🧭 line, unless another event lands on the same bar.

The drivers

Drivers are the events that send a message on their own — each with the day read on top:

Setting	When it fires	In the message
`◈ 7h Framework Set` (off)	A framework or profile was assigned or re-classified against the bias; with name, direction, expectation and the note that it opposes the bias. One that agrees with the bias sends nothing on its own — it shows in the 🧭 day read of every message.	🧭
`◇ 210m Quarters` (off)	A 210m signature set its quarters — with its levels, the working direction and its targets — or a 210m close ran through the 210m 25 % and the continuation read is gone.	💠
`▲` · `▼ Protected Swing Entry` (on)	A fully qualified entry, in three parts: the 🌓 headline (arrow, the sequence of events and trigger, the clock's framework), the trade line (direction and price, stop, TP1 and TP2 with their R, the setup) and the ⚖️ pro / contra.	🌓 🟢 🔴 ⚖️

Setting	When it fires	In the message
🛑 ✅ 🏆 🏁 trade fates	The latest entry was stopped, hit TP1, hit TP2 or its runner closed — each with its R (section 8). No switch of their own: they are sent while ▲ or ▼ is on, as messages of their own.	🛑 ✅ 🏆 🏁

Out of the box only the entries and their results speak: ◈ and ◇ are off, and everything else rides along with the next entry.

The passengers

The passengers are observations you like to read along, but rarely want reported on their own. They collect and ride at the end of the next driver's 🧭 day read, in this order, joined by `·`:

Setting	In the message · what it reports
`◑ New Bull Bias` · `◑ New Bear Bias`	`🌅 BULL bias · 25% 26303.0` A new day opened with that direction, with its 25 %.
`👀 Handover`	`🔄 NY on duty` The second reading takes over the decision session or hands it back (section 13). Only with a second clock.
`⊘ ADR Exhausted`	`⛔ ADR 78% used · no entries` At a clock's 08:00 the day's range had already filled the guard's fraction — no further entries on that clock today. Only with the ADR guard on.
`ϟ Climax`	`⚡ 25% defended 2.3× ATR` A climax bar, by kind and width in ATR (section 3). Up to two, then `+n`.
`◌ Session Liquidity Taken`	`✂️ ASIA.L · LON.H · NY.H +1` Session highs or lows just run, by name, without date or arrow, each name once. Up to three, then `+n`.
`▭ New Opening Gap`	`🕳️ 1 new gap` New NWOGs or NDOGs, as a count.

The first taps (`□ First Tap`) are no passenger: they have no line of their own and appear as the 👉 gauge in the day read (below). The list per gap stays on the ☐ mark, and the entry's pro / contra counts them (`taps 2↓ 0↑ (with)`); `↳ Re-Arm Each` (7H, 210m or Never) says when a gap counts again.

Passengers Ride Along


On by default: only ◈ frameworks that oppose the bias, ◇ 210m quarters and ▲ ▼ entries send on their own, each with the 🧭 day read on top. Everything else collects and rides at the end of its 🧭 line. `↳ Ride With` chooses which drivers take the passengers: `Entries` (the default — they wait for the next ▲ ▼) or `Every Driver` (opposing frameworks, 210m quarters and entries). A passenger kind that receives nothing for `↳ Max Age (Bars)` bars (60 by default) is dropped unsent. The queue also clears at the day open — except the new day's 🌅, which is set right then. Drivers without passengers still send, with the 🧭 line.

Switch `Passengers Ride Along` off and every bar on which a passenger fires sends a message of its own: the 🧭 day read with that bar's passengers. The new bias and the handover only ride along — with the switch off they are not sent; the ◑ marks on the chart and the screener's 🌅 list (section 17) still carry them.

> **IMPORTANT** **The 🌅 line and fast charts**
>
> The new bias is queued at the day open and waits for the next driver — by default the next entry — and `↳ Max Age (Bars)` counts chart bars. On a 3m chart 60 bars are three hours, and the first entry of a day comes in the morning window, long after the 18:00 open. On 3m and 5m charts the 🌅 line therefore usually expires unsent. Raise `↳ Max Age (Bars)`, or take the new biases from the screener's `🌅 New Day Bias · One List` (section 17), which sends every symbol's new bias in one message.

What a message contains

A complete message in the Telegram format, as it arrives on the phone — the day read with the tap gauge and a passenger that has collected since the last message, and the driver it rides with:

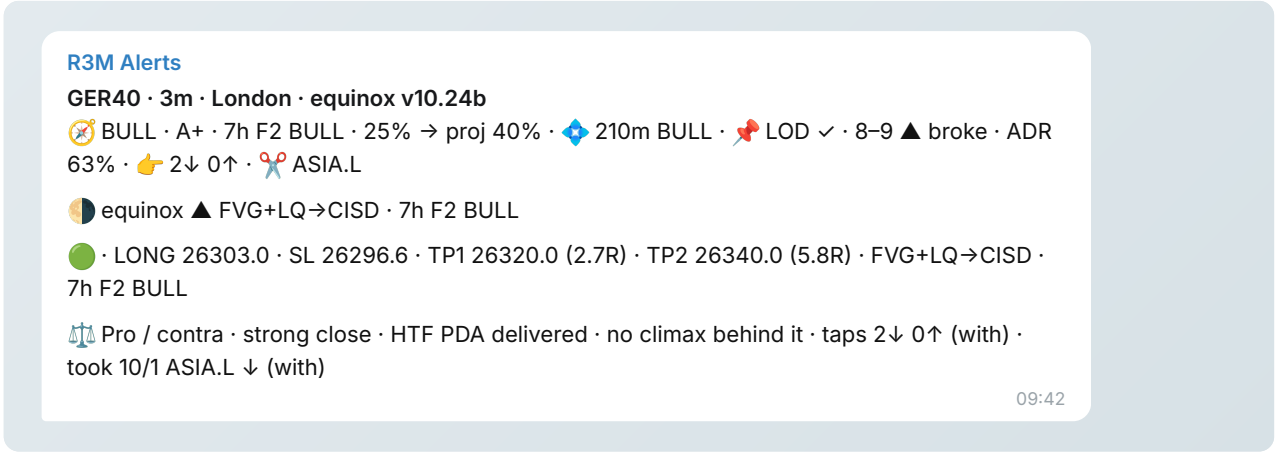

How to read it: the header names symbol, timeframe, the clock that spoke and the script version — `v10.24b` tells the archive and the statistics which version of the logic sent a trade, so the live results can be read version by version. Below it the day read: a bull day, still A+, the framework on duty F2 BULL, price 40 % of the way from the 25 % to the projection, live 210m quarters, a confirmed low of day, the 8–9 range broken upward, 63 % of the ADR used, and since 08:00 price has tapped into two gaps for the first time, both from above. The passengers close the line — here the Asia low was taken. Then the entry in three parts. The headline: 🌓 equinox, the arrow, the sequence of events and trigger and the clock's framework. The trade line: 🟢 for long (🔴 for short), direction and price first, after that SL (the stop), TP1 and TP2 with their R, and last the setup again. And the ⚖️ pro / contra, the same facts as in the entry's tooltip (section 8): a strong close, a delivery out of an HTF FVG, no climax behind it, the two taps from above and the Asia low taken — both backing the long.

The day read

The 🧭 line describes the reading on duty, in the same words the screener uses (section 17). Fields with nothing to say are left out:

Field	Reads	Meaning
Direction and state	`BULL · A+` · `BULL · reclaimed` · `BEAR · rev` · `BEAR · broken` · `doji`	The working direction and the state of the 25 %: never broken, broken and reclaimed, flipped by the reversal framework — or, with the reversal framework off, `broken`.

Field	Reads	Meaning
7h	`7h F2 BULL · 7h P1 BEAR`	The framework or profile of the clock on duty, with its direction (section 7). Missing while that clock has none yet — overnight before the first decision, or when nothing qualified.
25% → proj	`at 25% · beyond · 40% · ✓ reached`	Where price stands on its way from the 25 % (0 %) to the projection (100 %): within `↳ At The 25% · Within (× ATR)` of the level, through it without a validating close, the share of the way (0–99 %), or the projection reached.
💠	`💠 210m BULL`	Live 210m signature quarters.
📌	`📌 LOD ✓` · `📌 HOD ✓`	A confirmed extreme in the working direction — LOD on a bull day, HOD on a bear day.
8–9	`8–9 inside · 8–9 ▲ broke · 8–9 ▼ broke`	The 8–9 range of the clock on duty; only between 09:00 and 18:00.
ADR	`ADR 63% · ⛔ ADR 81%`	Today's fill of the 14-day ADR, with ⛔ in front once it has reached `↳ Exhausted At (Fraction Of ADR)` — guard on or off.
👉	`👉 2↓ 7↑`	First taps into HTF FVGs and opening gaps since the running 7h block began (first clock): ↓ came down into a gap, ↑ came up into one. A gauge for how much is being probed and on which side. Absent at 0; resets at 18:00, 01:00 and 08:00. Needs `□ First Tap` on. Passengers, if any, follow after it.

The other drivers

The other drivers follow the same idea, once you switch them on. A framework sends only when it opposes the bias — here at 08:00 on a 15m chart, with `◈ 7h Framework Set` and the ADR guard on and `↳ Ride With` on `Every Driver`, an F2 BULL on a BEAR day; three passengers have collected overnight and close its 🧭 line:

R3M Alerts

GER40 · 15m · London · equinox v10.24b

🧭 BEAR · A+ · 7h F2 BULL · 25% → proj 9% · ⛔ ADR 78% · 🌅 BEAR bias · 25% 24310.5 · 🔄 LON on duty · ⛔ ADR 78% used · no entries

🧭 · 7h F2 BULL · London Opens Expanding (F1 discarded) · opposes the BEAR bias.

08:15

A ◇ message (`◇ 210m Quarters` on), when a completed 210m candle sets its quarters — the same text as the ◇ mark's tooltip (section 5):

R3M Alerts

GER40 · 3m · London · equinox v10.24b

🧭 BULL · A+ · 7h F2 BULL · 25% → proj at 25% · 💠 210m BULL · 8–9 inside · ADR 48%

💠 · 210m Quarters Set · BULL · holds above 26298.0 · 50% 26292.0 · longs only · targets PDH +25% / +50%.

11:33

And the remaining event lines, as they appear below the day read — or, for the fates, on their own:

Line	When
`💠 · 210m Quarters Set · BEAR · holds below 26310.5 · 50% 26316.0 · shorts only · targets PDL −25% / −50%.`	The BEAR set.
`💠 · 210m Quarters Invalidated · 210m closed through the 210m 25% at 26298.0 · continuation read gone.`	A 210m close ran through the 210m 25 %.

`🌓 equinox ▼ LQ→EC · 7h F3 BEAR`
`🔴 · SHORT 26290.0 · SL 26301.5 · TP1 26270.5 (1.7R) · TP2 26247.5 (3.7R) · LQ→EC · 7h F3 BEAR`
`⚖️ Pro / contra · strong close · no climax behind it · taps 0↓ 1↑ (with)`
	A short entry, its three parts apart by blank lines; without a framework the `· 7h …` parts are missing.

`🛑 · LONG 26303.0 Stopped at 26294.8 (-1.28R) · SL 26296.6.`	The latest entry closed through its stop before TP1.
`✅ · LONG 26303.0 TP1 Hit 26320.0 (+2.66R).`	It reached TP1; half is out, the stop sits at the entry.
`🏆 · LONG 26303.0 TP2 Hit 26340.0 (+5.78R).`	It reached TP2.
`🏁 · LONG 26303.0 Runner Closed 26303.0 (+0R) · break-even.`	After TP1 a close came back through the entry.
`🏁 · LONG 26303.0 Runner Closed 26331.5 (+4.45R) · day end.`	The runner was still open at the day open; it closes at the day's last close.

With a second clock running, framework and entry lines carry the name of their clock — in the header (`GER40 · 3m · New York · equinox v10.24b`) when only one clock spoke, on the line (`🟢 · New York · LONG …` , `🧭 · London · 7h F2 BULL …`) when both land on the same candle. The 🧭 day read — its 7h field is always the framework of the clock on duty —, the passengers, the 💠 lines and the fates carry no clock tag. With the second clock off nothing carries a tag.

Emojis in the messages

The chart and the settings keep their symbols (◑ ◈ ◇ ⊘ ▲ ▼ ◌ ☐ ▭ ϟ); the messages and the hover tooltips use emojis, so a message on the phone is sorted before it is read:

Emoji	Meaning	When
🧭	The day read, with the framework on duty — and, as `🧭 ·` , a framework line	First line of every message (fates alone excepted) · ◈ framework set against the bias
📌	Confirmed extreme of day	In the day read
💠	210m signature quarters	In the day read while live · ◇ quarters set / invalidated
⛔	ADR exhausted	In the day read from the guard's fraction · ⊘ passenger
🌓	Entry headline: equinox, arrow, setup, framework	▲ ▼ entry, first part · head of the entry tooltip's read

Emoji	Meaning	When
🟢 / 🔴	Long / short entry	▲ ▼ entry, the trade line · also in the entry tooltip
⚖️	Pro / contra: the facts behind an entry, (with) / (against)	▲ ▼ entry, last part · also in the entry tooltip
🛑 / ✅ / 🏆 / 🏁	Stopped / TP1 hit / TP2 hit / runner closed	The latest entry's fate · also on top of its tooltip
🌅	New day's bias	Passenger, from the day open
🔄	Handover	Passenger, at the change of the reading on duty
⚡	Climax	Passenger · also the climax mark's tooltip
✂️	Session liquidity taken	Passenger
▬	New opening gap	Passenger
👉	First taps · ↓ from above, ↑ from below	In the day read, from the 7h block's first tap

The ◇ mark's tooltip is the long form of the 💠 Quarters Set line (the Invalidated text is the same in both), the climax tooltip that of the ⚡ tag, and the entry tooltip carries the same three parts as the entry message — with the day read inside its 🌓 line and, once known, the fate on top.

The options

- `Fire` — `Once Per Bar Close` waits for the candle to close and cannot be taken back. `Once Per Bar` reports on the first tick, faster, but a live candle can still change its mind.
- `Prefix Symbol & Timeframe` — puts symbol, timeframe, clock and version in front of the message (`GER40 · 3m · London · equinox v10.24b · 🧭 …`). Useful as soon as one alert list watches several charts; the Telegram format always carries the header.
- `↳ Append TP To Entries` — appends TP1 and TP2 with their R to the entry line (`· TP1 26320.0 (2.7R) · TP2 26340.0 (5.8R)`), the same targets as in the entry's tooltip (section 8).
- `↳ SMT Alone Only` (off) — only entries whose single qualifier is SMT, with no FVG, LQ or C2 behind them, send, and only their results. It is meant for an equinox watchlist alert next to eqx·screener·, which reads no SMT: the alert adds what the screener cannot see without doubling its entries. Switch the other drivers off for SMT entries alone. It is under a forward test: in the replay SMT alone made +15.3R on 28 trades, both halves positive — a small sample, picked from many combinations.

Message format: Plain Text or Telegram

`Plain Text` is the normal alert message for TradingView's own log. `Telegram` wraps the same message as a ready-made sendMessage request for the Telegram Bot API — TradingView posts the alert text to the webhook URL unchanged, so the message is the request, no relay server in between. The header becomes the bold first line there, and the ticker in it links back to the chart.

Telegram is the default. If you use an ordinary TradingView alert — app notification, e-mail, the alert log — set `Message Format` to `Plain Text`, otherwise the notification shows the raw JSON.

1. **Create a bot** with @BotFather and note its token.

2. **Get the chat ID.** Write to the bot, then open `api.telegram.org/bot<TOKEN>/getUpdates`. Put the ID into the `↳ Telegram Chat ID` field (channels start with -100…). The field comes pre-filled; replace that value with your own.
3. **Set the webhook.** In the alert dialog tick Webhook URL and enter `https://api.telegram.org/bot<TOKEN>/sendMessage`. The token lives in the URL, not in the indicator — it does not travel when you share a layout. Webhook alerts require a paid TradingView plan.

> UNDER THE HOOD **Why there is no “both”**
>
> The webhook URL belongs to the alert, not to the individual message — every alert() message of that alert goes to the same address. A plain-text copy would be posted to Telegram as well and rejected with 400 Bad Request. If you want a readable copy inside TradingView: the JSON already contains the full message in its text field.

SECTION 12

12 The session clock

The session clock is not a display option. It shifts the entire session grid — and with it the bias.

→ The three clocks 48
→ Why London runs on Berlin hours 48
→ Which instrument on which clock 49
→ The second clock is always the next in the cycle 49

> **IMPORTANT** **Why this matters so much**
>
> 18:00, 01:00 and 08:00 are not labels, they are the boundaries at which frameworks are decided. Change the clock and you move those boundaries — the day starts on a different candle, the overnight blocks cover different candles, and the framework may come out different. The display is not relabelled, it is recalculated.

The three clocks

`First Session Clock` (group 6 · Sessions & Clocks) has exactly three positions. Each names the session whose cash open falls into the deciding block 08:00–15:00 — and each runs on its own clock:

Clock	Runs on	Deciding block 08:00–15:00	The blocks before it (18–01 · 01–08)
`London` **(default)**	Berlin hours	London	New York · Asia
`New York`	New York time	New York	Asia · London
`Asia`	Tokyo time	Asia	London · New York

The alert header carries the clock's name (`GER40 · 3m · London · equinox v10.24b`), and with the second clock on, the readout's ▸ prefix does too. On a DAX chart that is London by default — not Frankfurt, because there is no separate Frankfurt clock and none is needed: London runs on Berlin hours.

Why London runs on Berlin hours

The LSE opens at 08:00 London time — that is 09:00 in Berlin. On Berlin hours the 8–9 range therefore still covers the run into the European open, and the entry window 09:00–10:30 sits exactly on it. At the same time the DAX and the other EU indices sit on this clock anyway: their cash open at 09:00 Berlin is the same minute. One clock for the whole European morning, with nothing to change by hand. The times equinox writes — labels, tooltips, the readout, alerts — are shown in `Display Time Zone` (group 7, Europe/Berlin by default) whatever the clock: on the New York or Asia clock they read Berlin too unless you set the zone there.

Which instrument on which clock

Instrument	Clock
DAX, GER40, EU50, FESX, CAC, SMI, IBEX, AEX, MIB, UK100 — the European indices	`London`
FX majors (EURUSD, GBPUSD ...), metals, energy — traded on the European session	`London`
NQ, ES, YM, RTY, US500, US index CFDs — and gold or EURUSD when you trade the New York open	`New York`
JP225, NKD, N225 — and the yen crosses (USDJPY ...)	`Asia`
HK50, CHINA50, AUS200, NIFTY, SG30, AUDUSD, NZDUSD — anything with an Asian-Pacific leg	`Asia`

The choice is a decision about which cash open should be your deciding block — not about where the symbol is listed. If you trade gold in the morning out of Europe, stay on London; if you trade the same ounce on the 09:30 in New York, take New York. Day boundary, blocks and 8–9 range then sit on the clock that session actually runs on.

The second clock is always the next in the cycle

`Second Session Clock (Next In Cycle)` (on by default) runs the model a second time — on the clock that follows the first in the cycle London → New York → Asia → London. There is no free choice, and no label field either: the second reading is called whatever its clock is called. London is followed by New York, New York by Asia, Asia by London. What the second clock does and how the handover between the two works is explained in section 13.

SECTION 13

13 Two clocks at once

One instrument can have two valid readings on the same day. The DAX is traded out of Europe in the morning and pulled along by the New York open in the afternoon — and those two sessions sit on different clocks. equinox runs both inside one single instance.

→ Why one clock is not enough 50
→ Switching it off 50
→ What the second clock does 51
→ The handover 51
→ Telling the two apart 52

Why one clock is not enough

The same GER40 candle produces two different days on two clocks:

	London clock	New York clock
Blocks	New York → Asia → London	Asia → London → New York
8–9 range	08:00–09:00 Berlin	14:00–15:00 Berlin
Framework	`F4 BULL · London Continues Through Asia`	`P4B BEAR · New York Reverses · No Sweep`
ADR guard	range left	exhausted

Both readings are right, each for its own session. And neither may judge the other: measuring the afternoon signal against the morning framework would be exactly the mistake the second clock exists to avoid.

Switching it off

The second clock runs by default: `Second Session Clock (Next In Cycle)` in group 6 · Sessions & Clocks is on. It is a single switch — off means only the first reading runs. Which clock the second one is you do not choose; it is always the next in the cycle:

First clock	Second clock
London	New York
New York	Asia
Asia	London

There are no custom labels: the two readings are called what their clocks are called — London, New York, Asia — in the status readout, on the marks and in the alerts.

What the second clock does

It runs the full model once more on its own clock — own bias, own 7h framework, own 8–9 range, own ADR guard, own entries. Only the previous-day levels are shared, because they come from the daily candle and are identical on any clock.

Of the second reading only its entries are drawn (with `Colors` on `Theme`, the default, in the chart's ink like the first clock's; on `Custom` in their own palette, `Entry Colors · 2nd Session Clock` — by default the same white / dark grey as the first clock; set your own pair there to tell them apart) and its 8–9 range (`8–9 NY.H / .L` on the London setup). Levels, projections, zones, session shading, session liquidity and the panels stay single — drawing them twice would only duplicate what is already there. The single `Entry Window` applies on each clock's own time: 09:00–10:30 Berlin for the first reading and 09:00–10:30 New York (15:00–16:30 Berlin time) for the second.

> **IMPORTANT** **A second window is not a second clock**
>
> Adding an afternoon range to `Entry Window` with the comma syntax (`0900-1030,1530-1700`) only opens the entry gate — and only on the first clock's reading. Bias, framework, 8–9 range and ADR guard stay on the first clock. It is the second reading that makes the afternoon its own day; with it the second range is usually redundant, because the second clock covers that same moment through its own window.

The handover

Two readings firing into the same minute would be the mistake from above all over again. That is what `↳ Session Handover` is for, on by default: from its own 08:00 until its own 18:00 the second reading owns the decision session. During that time only it fires entries, and it drives the status readout — its first line then carries `▸ New York ·`. Outside it the first reading is on duty. At every change equinox prints a mark below the candle, `◑ NY` when the second clock takes over and `◑ LON` when the first one takes over again at the end of the cycle (on other clocks `◑ ASIA` accordingly), and the handover rides along in the next message as `🔄 NY on duty` or `🔄 LON on duty`. The full text is in the ◑ mark's tooltip:

```
🔄 Handover · New York reading now owns the decision session (its 08:00) · London BULL
→ New York BEAR · entries and readout follow it
```

With the handover switched off, both readings run side by side and both fire entries. The mark and the 🔄 passenger then appear only when the two readings disagree on direction at the change.

> **UNDER THE HOOD** **Why the session needs an owner**
>
> The afternoon signal must not be measured against the morning framework — that is the reason the second clock exists. But two readings firing in the same minute would be exactly that: two verdicts on the same candle from two different days. The handover resolves it by giving the decision to the session that is running right now — and the other one a seat to watch from.

Telling the two apart

As soon as the second clock runs, both readings carry the name of their clock. You find it here:

- **In the status readout** — as `▸ London ·` / `▸ New York ·` in front of the bias line, on the line of the off-duty clock's framework (`New York · 7h P4B BEAR · New York Reverses · No Sweep`) and on the ADR line (`· London Exhausted · New York Exhausted`).
- **On the chart** — on the `◑ NY` / `◑ LON` handover marks, on the 8–9 lines (`8–9 LON.H` , `8–9 NY.H`), and in the entry palette (once you set `Colors` to `Custom` and give the second clock its own colours).
- **In the alerts** — in the header (`GER40 · 3m · New York · equinox v10.24b`) when only one clock spoke, and on the line (🟢 `· New York · LONG …`) when both land on the same candle: on the 🧭 framework and 🟢 🔴 entry lines. The 🧭 day read, the passengers, the 💠 quarters lines and the fates carry none.

There is no framework banner at the top of the chart — the framework lives in the status readout alone (section 7).

SECTION 14

14 Reading a day

What a full run through the day looks like. All times on the indicator's session clock — the first clock, London on Berlin hours by default. The table follows the first clock's reading; with the second clock and the handover on, the readout shows the New York reading from 14:00 until midnight (section 13).

Time	What happens
18:00	The day begins. equinox reads the completed previous-day candle, sets the bias and draws the 25 %, the 50 % and the projections. Its framework line reads `7h · New York Forming`. The new bias is queued as a 🌅 passenger for the next message. Your job: take note. There is nothing to do.
18:00–01:00	Block 1. Watch whether it takes a valid level and closes back with rejection. If a 210m candle breaks through the 25 % in this window the bias flips — and with the reversal framework on, so does the working direction.
01:00	F1 is decided. If block 1 manipulated, `7h F1` and a direction now sit in the status readout — and in the day read of every message (🧭 `BULL · A+ · 7h F1 BULL · …`); a ◈ message of its own comes only with `◈ 7h Framework Set` switched on, and only when it opposes the bias. If not, the readout switches to `7h · F2/F3 Developing`.
01:00–08:00	Block 2. The most volatile overnight session. If an F1 stands, equinox checks at 08:00 whether this block delivered on the prediction.
08:00	The deciding minute. Three things at once: F1 is verified or discarded, F2 and F3 are tested (F2 first), and the ADR guard, once switched on, measures how much range is left. After that the bias is locked in for the deciding session.
08:00–09:00	The 8–9 range forms. It is drawn at 09:00 and extended to 10:30. No entries yet — the window is closed.
08:00–11:00	F4 runs live. If the deciding session takes an extreme of the second block, the close of the sweeping candle decides between reversal and continuation. Until the 210m candle closes at 11:30 it reads `Developing · Unconfirmed` — you do not trade that.
09:00–10:30	The entry window. Now the chain from section 8 applies. If an equinox mark appears, every condition has been met: direction, event, trigger, filters. What else stood behind it is in the pro / contra, in the label's tooltip.
After an entry	equinox follows the trade: TP1, TP2, the stop or the runner's close arrive as messages of their own (✅ 🏆 🛑 🏁, section 8).
10:30	Cutoff. No new entries on this clock. Existing drawings stay until price closes through the protected swing.
14:00 (= 08:00 New York)	The handover. With a second clock and `↳ Session Handover` — both on by default — the New York reading takes over the decision session (section 13). The readout switches to `▸ New York ·`, a `◑ NY` mark prints below the bar, and the handover rides along with the next message (`🔄 NY on duty`). From now on only the New York reading fires entries — inside its own 09:00–10:30, which is 15:00–16:30 Berlin time, with its own bias, its own framework and its own 8–9 range.

Time	What happens
18:00	The day closes. Queued passengers are dropped unsent (the new day's 🌅 is queued fresh), an open trade that never reached TP1 expires silently, a runner is closed (`· day end`), a live climax ends — and the next day begins with the first row of this table. The New York reading stays on duty until its own 18:00, midnight Berlin time; then London takes over again (`◑ LON`).

One thing keeps to no row of the table: a ϟ climax bar can appear at any time of day — an oversized candle that prints a new day extreme and closes in its opposite half. While it is live it vetoes entries in its direction; the bias stays what it is (section 3).

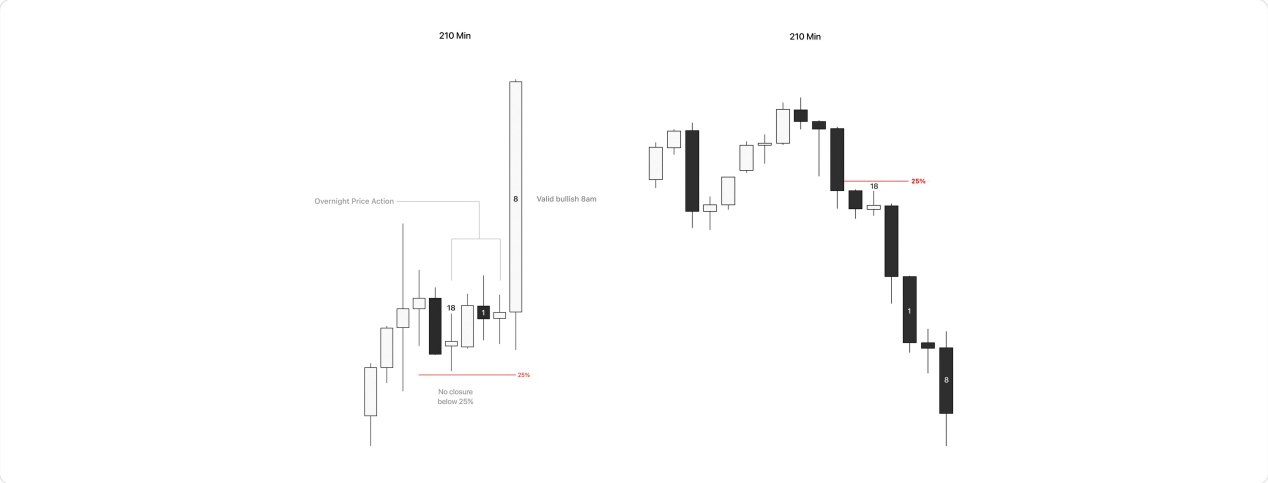


Fig. 1 **Two complete days on the 210m:** left the bullish run — the night (18, 1) respects the 25 %, the long bias is valid at 08:00, and the deciding session expands. Right the bearish counterpart: the 25 % above the open survives every pullback, and the 1 and 8 o'clock candles carry the expansion lower.

> **NOTE** **The most honest observation first**
>
> On many days nothing happens before 10:30. No framework, no entry, or a framework pointing against the bias that shuts everything down. That is the normal case and the actual purpose of the whole filter chain — not a sign that something is set up wrong.

SECTION 15

15 What the chart does not show

The sections so far describe what you see. This one describes the bookkeeping behind it: the deadlines, the pecking order and the follow-up checks equinox runs in the background without displaying them. Eleven of them — and they account for most of the moments when the status readout says something other than what price suggests.

→ The bias has a filing deadline 55
→ F1 is the only prediction settled the same morning 56
→ At 08:00 the accounts are settled — in a fixed order 56
→ The ADR guard is a doorman, not a camera 56
→ Until 11:30, F4 is an exit poll 56
→ Run-up and take-off 57
→ An entry is a seat, not a day pass 57
→ A trade is followed one at a time 57
→ A confirmed extreme is a record, not a monument 57
→ Every entry gets a pro / contra, not a verdict 57
→ A climax is a veto with an expiry 58

The bias has a filing deadline

Breaking the 25 % is an objection against the bias — and objections come with rules. Only a fully completed 210m candle is admitted as a witness, and it has to be filed before 08:00. After that the clerk's office closes: for the deciding session the bias stands.

That is why a 3-minute spike through the 25 % at 09:15 goes nowhere. The status readout still says `Intact` even though price was visibly below it — the objection came too late and from the wrong witness. The settings responsible are `Validate With 210m Closes` and `Overnight Candles Only (18:00–08:00)`.




Fig. 1 **Wicks are not closes:** two candles dip under the 25 %, none closes below it — the objection never becomes final, the day stays intact and expands.

F1 is the only prediction settled the same morning

F1 says: London will run. London is finished by 08:00 — so the prediction can be checked while the day is still going. That is why F1 sits on probation between 01:00 and 08:00, even though the status readout shows it like any other framework. It has been called, but it has not been paid out.

At 08:00 the accounts are settled — in a fixed order

The order is not a detail. It decides which framework the day gets:

	What happens
first	F1 is verified. If London closed against the direction, the framework is cleared. `F1 ✗` stays in the status readout as the record.
then	The day is re-read from the London data: F2 first, then F3.
last	Only if neither produces anything do the profiles P1 and P1B get a turn.

> **NOTE** **Manipulation is trumps**
>
> A trend is a high card; a manipulation is trumps. A day showing both therefore always gets the manipulation framework. P1 is the reserve for days on which nobody manipulated — not an equal candidate alongside F2 and F3.

The ADR guard is a doorman, not a camera

By default he is off duty — `ADR Exhaustion Guard` is switched off. Once switched on, he looks once, at 08:00: how much of the usual daily range has already been spent? If the figure is above the threshold (`↳ Exhausted At (Fraction Of ADR)`, three quarters by default), the door stays shut for the rest of the day.

Then he leaves. A day that gets past him at 08:00 stays armed — even if it has long since run out by 10:00. And a day turned away stays turned away, even if price coils back up afterwards. With a second clock the same doorman stands once more at that clock's own 08:00 (`↳ Also Gate The 2nd Session Clock`) — the status readout says with `London Exhausted` / `New York Exhausted` which door is currently shut. The ⛔ in the day read of the alerts is a different thing: it watches the fill live, all day, and shuts nothing.

Until 11:30, F4 is an exit poll

F4 is read live as soon as the deciding session sweeps an extreme of the second block. But the choice between reversal and continuation hangs on the close of the 210m candle that started at 08:00 — and the count is not in until 11:30.

> **IMPORTANT** **The most common trap in the whole model**
>
> As long as `Developing · Unconfirmed` is showing, you are looking at an exit poll, not a result. The candle is still open and can switch sides up to the last minute. It reads like a signal, but it sets neither framework nor entry.

Run-up and take-off

The trigger is the take-off, the qualifying event is the run-up. Three things follow from that:

- The run-up has to come before the take-off — and inside the same run that is being reversed.
- Only the last run-up counts. An earlier one is overwritten, even if it looked stronger.
- After 40 bars it has gone cold and no longer counts.

That is why a CISD without a run-up never fires, however clean it looks. The breakout is the exception: it is not a jump but a sprint — continuation instead of reversal, and that needs no run-up. By default the run-up rule applies to the signatures as well (`Signatures Require Event Gate`).

An entry is a seat, not a day pass

The drawing does not vanish at midnight, only once price closes through the protected swing. That is the moment the seat frees up — and with `One Entry Per Day` active, the next one takes it.

So a day can show two entries. That contradicts the name of the setting only on the surface: what is meant is one seat at a time, not one per calendar day.

A trade is followed one at a time

The fate messages of section 8 belong to the latest entry only, whichever clock fired it. A newer entry takes over the tracking; the older one is no longer reported, even if it reaches its target later. The tracking has its own rules, too: TP1 and TP2 count on a touch, the stop on a close through it — and the stop only until TP1. From then on the rest is a runner with its stop at the entry: a close back through the entry or the day open closes it. At the day open a trade that never reached TP1 simply expires, without a message. And because the drawing goes only on a close through the protected swing, a trade with a tight stop can be reported stopped while its mark stays on the chart.

A confirmed extreme is a record, not a monument

`LOD London✓` means three things at once: a completed 210m candle swept a level, it reclaimed that level, and its low is still standing.

The last of those is re-checked continuously. If the low gets taken out, the record is broken and the marker disappears. Losing it is news, not a glitch.

Every entry gets a pro / contra, not a verdict

Before an entry prints, equinox checks only the chain: working direction, event, trigger, filters. If it holds, the entry is drawn. Only afterwards does it collect what else stood behind the trigger and write it into the label's tooltip, under the trade line: the strong close, a delivery out of an HTF PDA, a climax behind it, the first taps of the 7h block and the session levels just taken, each marked (with) or (against) where it takes a side (section 8).

None of it filters. No trigger is silently dropped because of it: an entry with three facts against it is a valid entry, just a thin one. The entry alert carries the same pro / contra below the trade line (section 11).

A climax is a veto with an expiry

A ϟ bar vetoes entries in its direction — no longs into a climax at the day high, no shorts into one at the day low. But the veto expires: it holds only while the climax is live — until the day ends or a close runs through its extreme — and only while `↳ Block Entries Into A Live Climax` is on. That is all it does: it flips neither the bias nor the framework, and the status readout reads unchanged.

In the other direction it is not an obstacle but an argument: an entry against the climax — a long after a climax at the day low, a short after one at the day high — carries `climax behind it (with)` in its pro / contra (section 3).

> **TIP** **If you follow up on one of these, make it the 08:00 settlement**
>
> Count how often `F1 ✗` shows up in the status readout over a few weeks. That is your hit rate for the question of whether Asia manipulations actually carry through to London on your instrument — and that one number tells you more than any setting.

SECTION 16

16 Common mistakes

The complaints that come in most often — and what is actually going on in each case.

Mistake	What is actually going on
"The indicator shows nothing."	Usually the timeframe. 45m, 90m and 4H do not divide the 420 minutes — the status readout then says `7h · Unsupported Chart TF (Use One Dividing 210m)`. Switch to 5m or 15m (section 2).
"No entries are coming."	By default entries stand down above 15m, outside 09:00–10:30, against an opposing framework, in the direction of a live climax — and on an exhausted ADR once the ADR guard is switched on. With the handover, only the other reading fires in the afternoon; the ▸ in the status readout says which one is on duty. Check the status readout — it tells you which filter is biting.
"The day started yesterday."	Correct. The trading day starts at 18:00 the day before.
"The readout says London, but my chart shows Berlin time."	Both are right. The London clock runs on Berlin hours — that way the 8–9 range covers the run into the European open, and the DAX sits on the same clock (section 12).
"The framework changed."	By design. A disproven read is cleared and the day re-classified. The × in the status readout records what was discarded.
"The F4 display keeps jumping."	As long as it says `Developing · Unconfirmed`, the indicator is reading a 210m candle that is still open. It closes at 11:30. Before that it is a preview, not a signal.
"The SMT line was there a second ago."	The newest panel candle is unfinished. Divergences are allowed to flicker until it closes.
"I changed the session clock and everything is different."	Correct, and that is the point. The clock moves the session grid, it does not relabel it.
"I cannot see the panel candles."	Dark theme with `Colors` on `Custom`: there the panel candles keep the colours set for a light chart — invert the three under `Panel Candles`, or set `Colors` back to `Theme`, which turns outline and wicks white on a dark chart (section 10).
"The levels are the wrong way round."	They are measured from the previous-day close to the opposite extreme, not across the whole range. On a bullish previous day the 25 % sits below the open.
"I see no mark where the 25 % broke or was reclaimed."	They have no mark of their own. Read them in the first readout line (`Reversal`, `25% Reclaimed`) and in the day read of every message (`rev`, `reclaimed`); the projections change sides with them (section 3).
"My alert arrives as JSON text."	`Message Format` is `Telegram` by default — the message is then a ready request for the Bot API. For TradingView's own notifications switch to `Plain Text` (section 11).

Mistake	What is actually going on
"The liquidity / tap messages never come."	Liquidity rides at the end of the 🧭 line of the next entry message (`↳ Ride With` , `Entries` by default; `Every Driver` adds opposing frameworks and 210m quarters) and is dropped after `↳ Max Age (Bars)` (60 bars); to get it on every bar, switch `Passengers Ride Along` off. The first taps never send on their own — they are the 👉 gauge in every day read (section 11).
"The framework message no longer comes."	`◈ 7h Framework Set` is off by default, and switched on it sends only for a framework that opposes the bias. The framework on duty is in the 🧭 day read of every message instead (`7h F2 BULL` , section 11).
"The new-bias message did not arrive."	On fast charts the 🌅 passenger usually expires before the first driver of the day comes (section 11). Raise `↳ Max Age (Bars)` , or use the screener's 🌅 `New Day Bias · One List` (section 17).
"The TP stub sits on an FVG edge / on the 8–9 high."	That is the liquidity ladder: the near edges of HTF FVGs and opening gaps and the 8–9 highs and lows are rungs of it (section 8).
"There are two frameworks in the status readout."	The second clock is on by default. The muted line is the other clock's reading; the ▸ marks the one on duty (section 13).
"Long and short entries have the same colour."	With `Colors` on `Theme` , the default, both are drawn in the chart's ink, on both clocks: ◐ below the candle is a long, ◑ above it a short. For colours per direction and clock set `Colors` to `Custom` (group 7) and pick them under `Entry Colors · 1st / 2nd Session Clock` (group 4).
"The stop message shows more than −1R."	Stops fire on a close beyond the stop, and the message books that close: `Stopped at 26294.8 (-1.28R) · SL 26296.6` . The SL figure is the level, the R is what the close cost (section 8).
"After TP1 came a 🏁 at +0R."	The runner: after TP1 the stop sits at the entry, and a close back through it closes the second half at break-even. Half the trade was banked at TP1 (section 8).
"The day read in equinox and the screener's row differ."	Same bars, same engine — but the settings must match: `↳ At The 25% · Within (× ATR)` (equinox, group 7) = `At The 25% · Within (× ATR)` (screener), `↳ Exhausted At (Fraction Of ADR)` (equinox, group 2) = `ADR Exhausted At (Fraction)` (screener), and clocks, handover and 210m validation alike.
"My message has emojis, the chart has symbols."	By design: emojis are for the phone and the tooltips; the chart and the settings keep the symbols (section 11).

SECTION 17

17 The screener · eqx·screener·

equinox reads one chart. The screener reads up to ten symbols at once — with the same bias engine and the same entry engine, on the same candles — ranks them by how their entries have run and sends every entry and result of the watchlist through one alert.

→ The columns 62
→ The heatmap 63
→ The ranking 64
→ Settings 64
→ Reports and alerts 66

eqx·screener· is an indicator of its own. It draws nothing on price, only a table, and it runs best in the bottom panel: right-click the table → `Move tables to bottom panel`. Every row is a symbol from your watchlist, read on the timeframe of the chart the screener sits on — previous day, 25 % and 50 %, validation on 210m closes, both session clocks, handover, the 7h frameworks, the entries and their fates. What a row says, equinox says just the same on that symbol's chart, SMT aside.

eqx·screener· · 3m · Dark Panel · Heatmap · 10:05 — the record and the bias

#	symbol	runs	TP1	TP2	stop	ΣR	with	against	bias · LON → NY
1	GER40	12	67%	33%	25%	+7.4	70% · 10	50% · 2	BULL → BULL · A+ · LON
2	NAS100	14	64%	36%	29%	+6.8	70% · 10	50% · 4	BEAR → BEAR · A+ · LON
3	XAUUSD	11	55%	27%	36%	+2.6	56% · 9	50% · 2	BULL → BULL · A+ · LON
4	EURUSD	9	44%	22%	44%	−0.4	50% · 6	33% · 3	BEAR → BULL · rev · LON
5	UK100	10	40%	20%	50%	−1.0	43% · 7	33% · 3	BEAR → BEAR · rcl · LON
6	USDJPY	3 ·	67%	33%	33%	+1.4	67% · 3	·	doji

eqx·screener· · 3m · Dark Panel · Heatmap · 10:05 — the day and today's entry

#	symbol	8–9	25% → proj	ADR	setup · 3m	since	status	R	price
1	GER40	inside	30%	38%	▲ FVG+LQ→RC+EC	09:12	TP1 Hit	1.5	24331.5
2	NAS100	▼ broke	38%	57%	▼ LQ→CISD	09:24	Live	1.8	24872.5
3	XAUUSD	▲ broke	✓ reached	81% ⊘	▲ BO	09:03	TP2 Hit	1.2	4102.07
4	EURUSD	inside	31%	61%	·	·	·	·	1.08412
5	UK100	inside	12%	44%	▼ C2→IRC	09:36	Stopped	1.3	9312.4
6	USDJPY	inside	·	29%	·	·	·	·	151.842

The first six rows of a watchlist at 10:05 on the London clock, heatmap on — shown in two halves to fit the page; on screen it is one table, one row per symbol, read from left to right: rank and symbol, the record (runs · TP1 · TP2 · stop · ΣR · with · against), the day (bias · 8–9 · 25% → proj · ADR), today's entry (setup · since · status · R) and the price. The same reading order runs through all three R3M screeners.

UNDER THE HOOD **What the screener does not read**


SMT. The screener runs equinox's entry engine in every symbol — 7h frameworks, CISD and signatures, the events, the protected swing, the TP ladder (see "Entries and results" below) — but SMT needs two partner symbols per slot. Every slot already costs four data requests (its read on the chart timeframe, its daily series and the two climax timeframes of `MTF`), and ten slots use up TradingView's forty. In the replay 28 of 799 equinox entries (3.5 %) rested on an SMT alone; those come only from equinox on the chart.

The columns

Column	Meaning
#	The rank. With the heatmap its fill is today's entry: faintly green while it runs, green at TP1 or as a runner, deeper green at TP2, red when stopped — fading over about six hours.
symbol	The symbol; its fill is the record as a whole — TP1 and stop against their chance.
runs	equinox entries taken on this symbol over the bars the chart has loaded, one per day and clock at most. Below `↳ Min Runs` (5) the count gets a `·` and the symbol counts as young.
TP1	The share of those entries that touched TP1 before the stop.
TP2	The share that went on to touch TP2.
stop	The share that closed through the stop before TP1.
ΣR	The record in R, counted all out at TP1 and a stop as −1R, gross — before spread and commission, without the runner.
with · against	The entries with the day's flow — the previous day's direction, A+ and reclaimed days — and against it, on reversal days, where the working direction flipped: the share that touched TP1 and how many, `70% · 10`. The Σ R of each is in the row tooltip.
bias · LON → NY	The working direction on both clocks, first → second, then its state on the clock on duty and that clock: `BULL → BULL · A+ · LON`, `BEAR → BEAR · rcl · LON`, `BEAR → BULL · rev · LON`, `doji`. States: `A+` · `rcl` (reclaimed — written out in the tooltip, the report and the alerts) · `rev` · `broken` (with the reversal framework off) · `doji`. Coloured by the working direction on duty; orange when the two clocks disagree — a 210m close broke the 25 % in one overnight window but not in the other, and those are the days on which the second clock's 08:00 flips the direction. Without a second clock the cell reads `BULL · A+`.
8–9	The 8–9 range of the clock on duty, from 09:00 to 18:00: `inside`, `▲ broke`, `▼ broke` (first close outside), coloured by the side it broke.
25% → proj	How far price has come on its way from the 25 % (0 %) to the projection in the working direction (100 %): `at 25%` (within `At The 25% · Within`, 0.5 ATR by default) · `beyond` (through the 25 % without a validating close) · `NN%` of the way · `✓ reached` (green). The two prices and the distance in ATR are in the row tooltip.
ADR	Fill of the 14-day ADR, `81% ⊘` from the `ADR Exhausted At` threshold (75 % by default).
setup	Today's equinox entry: ▲ long or ▼ short and how it came, qualifier → trigger — `▲ FVG+LQ→RC+EC`, `▼ BO`. In its direction's colour while the trade runs (after TP1 too, as a runner), grey once it is done. `·`: no entry today.
since	The time of the entry (HH:mm, on the `Display Time Zone`).

Column	Meaning
status	How it stands: `Live` · `TP1 Hit` · `TP2 Hit` · `Runner Closed` · `Stopped` — `Live` orange, the targets and the runner green, the stop red.
R	TP1 in R. While the trade runs it is tinted against 1.5R.
price	The last price.

Hover a row for its long form — the record, the flow split with its Σ R, the bias record, the bias with its 25 % and projection, the day and today's entry:

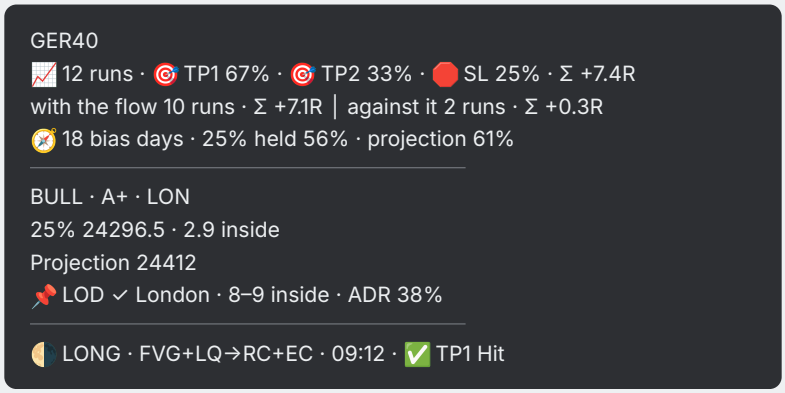

The 25 % line reads `at 25%`, `2.9 inside` (ATR on the working side) or `0.3 beyond`. The bias record counts the bias days on the loaded bars, the share on which the 25 % held to the close and the share on which the projection in the working direction was reached.

The heatmap

`↳ Heatmap` (under `Theme`, on by default, panel themes only) colours the cells by strength rather than by direction — one ladder, the same in all three R3M screeners. The record is measured against its chance: how often TP1 would come before the stop on distance alone, summed over the entries as risk / (risk + distance to TP1). Green beats it, red falls short, about even stays unfilled, and few runs make it paler.

- **The record.** `TP1` against its chance, `TP2` against 0.6 × that chance, `stop` against its own (100 % minus TP1's) — fewer is green there. `with` and `against` like TP1. The symbol cell carries the mean of TP1 and stop; `ΣR` is green or red by its sign.
- **Today.** The # cell carries today's entry, `since` and `status` its state — `Live` orange · TP1, TP2 and the runner green · `Stopped` red —, the fill fading over about six hours. `R` is tinted against 1.5R while the trade runs.
- **The day.** The bias cell is orange when the two clocks disagree, `ADR` red once it is used up, `✓ reached` green.

Heatmap off — and always in `Chart Ink` — the table keeps its classic tints.

The ranking

There is one order: the entry record. The symbols whose equinox entries paid best sit at the top — the TP1 rate minus the stop rate, the TP2 rate breaking ties. Symbols with fewer than `↳ Min Runs` (5) count as young and sit at the bottom, symbols without data last. The header of the rank column says in its tooltip which slots are filled and which carry data.

Ten or fifteen runs are a small sample. The edges are meaningful — a symbol with two thirds of its entries at TP1 against one with a third behaves differently —, the middle of the table is noise. A symbol is reliable when its position stays stable over two or three weeks, not because it sits at the top today.

Settings

1 · Watchlist

Setting	Default	What it does
`Watchlist`	Custom	`Custom` reads the ten slots below. The presets replace them: `Forex · Pepperstone`, `Indices · Pepperstone`, `Commodities · Pepperstone`, `S&P 500 · Top 10`, `Nasdaq 100 · Next 10`, `DAX · Top 10`, `Futures · CME / Eurex` — each reads its first ten. The slots keep their entries while a preset is on.
`History Bars`	10000	How many bars each symbol is read over, and so how far its record reaches (1,000–10,000). The live chart runs fine on 10,000; see the tip below for Bar Replay.
`1` … `10`	`PEPPERSTONE:` GER40, UK100, EUSTX50, US500, NAS100, EURUSD, USDCHF, USDJPY, GBPUSD, XAUUSD	`EXCHANGE:TICKER` per slot. An empty slot is skipped. More than ten is not possible — every symbol costs four data requests, TradingView allows forty.

2 · Bias & Reads

The same switches as in equinox — set them alike, and the screener reads the same.

Setting	Default	What it does
`First Session Clock`	London	As in equinox: the overnight window that validates the bias, the 8–9 range, the entry window.
`Second Session Clock (Next In Cycle)`	on	The second reading with its own overnight window, 8–9 range and entries.
`↳ Session Handover`	on	From the second clock's 08:00 to 18:00 that reading steers the row and fires the entries.
`Validate With 210m Closes`	on	Only completed 210m closes invalidate.
`Overnight Candles Only (18:00–08:00)`	on	Only overnight closes invalidate.
`Reversal Framework On 25% Break`	on	A close through the 25 % flips the day.

Setting	Default	What it does
`At The 25% · Within (× ATR)`	0.5	The "at the 25 %" distance — equal to equinox's `↳ At The 25% · Within (× ATR)`.
`ADR Exhausted At (Fraction)`	0.75	The ADR threshold of the ⊘ and the ⛔ — equal to equinox's `↳ Exhausted At (Fraction Of ADR)`. It gates nothing: the entries run without the ADR guard, as in equinox's default.
`ϟ Climax Bar (× ATR)`	2.0	Minimum width of a climax bar.
`↳ Climax Timeframe`	MTF	`Chart`, `Auto`, `MTF` or a fixed 1m … 4H, as in equinox up to 4H. The climax has no column: it blocks entries into a live climax, as in equinox.

The entry engine itself has no switches: it runs with equinox's defaults (see "Entries and results" below).

3 · Table

Setting	Default	What it does
`Display Time Zone`	Europe/ Berlin	The zone of every time the screener writes — table, alerts, their header — and of the report times. As in equinox: only the display.
`↳ Min Runs`	5	Runs a symbol needs before its record counts for the ranking (1–100).
`Rows`	12	How many symbols the table shows (3–12); ten slots fill it.
`Position`	Middle Center	Where the table sits.
`Width · % Of Panel (0 = Auto)`	0	0: the panel themes take the full panel width with fixed column shares, Chart Ink sizes every column to its text. A number sets the share explicitly.
`Theme`	Dark Panel	`Chart Ink` (monochrome, follows the chart colours) · `Dark Panel` · `Light Panel` (coloured cells, made for the bottom panel).
`↳ Heatmap`	on	Panel themes only: cells coloured by strength (see The heatmap). Off: the classic tints.
`Monospace Font · Font Size`	on · +1	Font and size of the table.
`Bull / Bear (Chart Ink)`	white · dark grey	Direction colours of the Chart Ink theme, with `Colors` on `Custom`.
`Colors`	Theme	`Theme`: the Chart Ink theme's bull and bear both in the chart's ink. `Custom`: the two fields above. The panel themes, the status colours and the heatmap stay as they are.
`Up / Down (Panels)`	green · red	Direction colours of the panel themes (`#089981` / `#f23645`).
`↳ Middle / Caution`	orange	`Live` and the clock disagreement (`#ff9800`).

4 · Report & Alerts

Setting	Default	What it does
`Entries & Results`	on	Every equinox entry and its result on every symbol, one message per bar (see "Entries and results" below).

Setting	Default	What it does
`Top N In The Report`	3	How many symbols a report lists (1–12).
`Report 1` + time	on · 08:00	First report, on the `Display Time Zone`.
`Report 2` + time	on · 14:00	Second report.
🌅 `New Day Bias · One List`	off	At each new trading day, every symbol's new bias in one message.
`Message Format`	Telegram	`Telegram` or `Plain Text`, as in equinox.
↳ `Telegram Chat ID`	pre-filled	Replace it with your own chat ID.
`Send A Test Report On The Next Bar Close`	off	One test report (🧪) to check the chain.
`Heartbeat Every Bar Close (Diagnostics)`	off	One ❤ line per candle.

Reports and alerts

One alert is enough, exactly as with equinox: Add alert → condition `eqx·screener·` → `Any alert() function call` → webhook. The entries and results, the report, the bias list and the heartbeat each go out as a message of their own, under the header 🌓 `eqx screener v10.24b · 3m · London 09:42` — the script version, as in equinox's header, then timeframe, first clock and the bar's time on the `Display Time Zone`.

Entries and results

`Entries & Results` (on by default) runs equinox's entry engine inside every symbol, with equinox's defaults built in: the 7h frameworks in `Block Opposing`, CISD and the three signatures only after an FVG, LQ or C2 event no older than 40 bars, the breakout through the 8–9 range, the strong close, one entry per day and clock, the window 09:00–10:30 on each clock's own time with the handover, no entries above 15m charts and none into a live climax, the stop at the protected swing, and TP1 / TP2 on the liquidity ladder — both clocks' 8–9 ranges, PDH / PDL, PWH / PWL, the untaken session levels of the first clock, the near edges of the two HTF FVG layers equinox's `Automatic` mode would draw, and of the NWOG / NDOG. After TP1 the runner works as in equinox (section 8).

The bar's entries and results go out as one message in the screeners' compact format, the same for all R3M screeners, the events apart by a blank line. An entry is three lines, read like equinox's tooltip. The first: 🆕, 🟢 or 🔴, the symbol, 🌓 equinox with its arrow, then 🧭 the day — bias and its state (`A+`, `re-claimed`, `rev`), the clock that fired, the framework. The second, the trade: direction and price, SL, TP1 and TP2 with their R, 🌓 qualifier → trigger. The third, after ⚖️: the day's facts — 💠 quarters, 📌 confirmed extreme, 8–9, ADR — and 📈 the symbol's record with this entry counted, its runs and TP1 rate:

R3M Alerts
🌓 **eqx screener v10.24b · 3m · London 09:12**
🆕 · 🟢 GER40 · 🌓 equinox ▲ · 🧭 BULL · A+ · LON · 7h F2 BULL
🟢 · LONG 24318.5 · SL 24301.2 · TP1 24344.8 (1.5R) · TP2 24372.0 (3.1R) · 🌓 FVG+LQ→RC+EC
⚖️📌 LOD ✓ London · 8–9 inside · ADR 35% · 📈 12 runs · 🎯 TP1 58%
09:15

The results stay one line each — TP1 with the TP2 still ahead, the stop at the close it fired on, each with its R. Two results on one bar arrive together, the symbols in the table's ranking order:


R3M Alerts
🌓 **eqx screener v10.24b · 3m · London 09:42**
✅ · GER40 · LONG 24318.5 TP1 Hit 24344.8 (+1.52R) · TP2 24372.0 ahead.
🛑 · UK100 · SHORT 9318.6 Stopped at 9322.9 (-1.19R) · SL 9322.2.
09:45

Line	When
`🏆 · XAUUSD · LONG 4091.35 TP2 Hit 4101.40 (+3.09R).`	TP2 touched.
`🏁 · GER40 · LONG 24318.5 Runner Closed 24318.5 (+0R) · break-even.`	After TP1 a close came back through the entry.
`🏁 · GER40 · LONG 24318.5 Runner Closed 24359.0 (+2.34R) · day end.`	The runner was still open at the symbol's day open; it closes at the day's last close.

History is never sent. A live event goes out once, after the chart's own bar has closed too: a symbol whose bar closes a moment after the chart's arrives with the next bar — one bar late at worst, but not lost. For one symbol a result comes before a new entry. The archive and the Saturday report read these lines as equinox trades. One alert on the screener replaces equinox's watchlist alert — switch that one off, or every entry arrives twice.

The report

At the two report times the screener sends the top N of the ranking as one message, one entry per symbol separated by a blank line, in the table's reading order: direction (🟢 bull · 🔴 bear · ⚪ doji), symbol, 📈 the record, 🧭 the day — bias, clock, the handover when the two clocks disagree (🔄 `BEAR → BULL`), the way to the projection, quarters, extreme, 8–9, ADR —, 🌓 today's entry with its TP1 in R, its status and ⏰ time, and the price. Three lines for the whole watchlist close the message. Here Report 1 was set to 10:00, after the morning's entries:

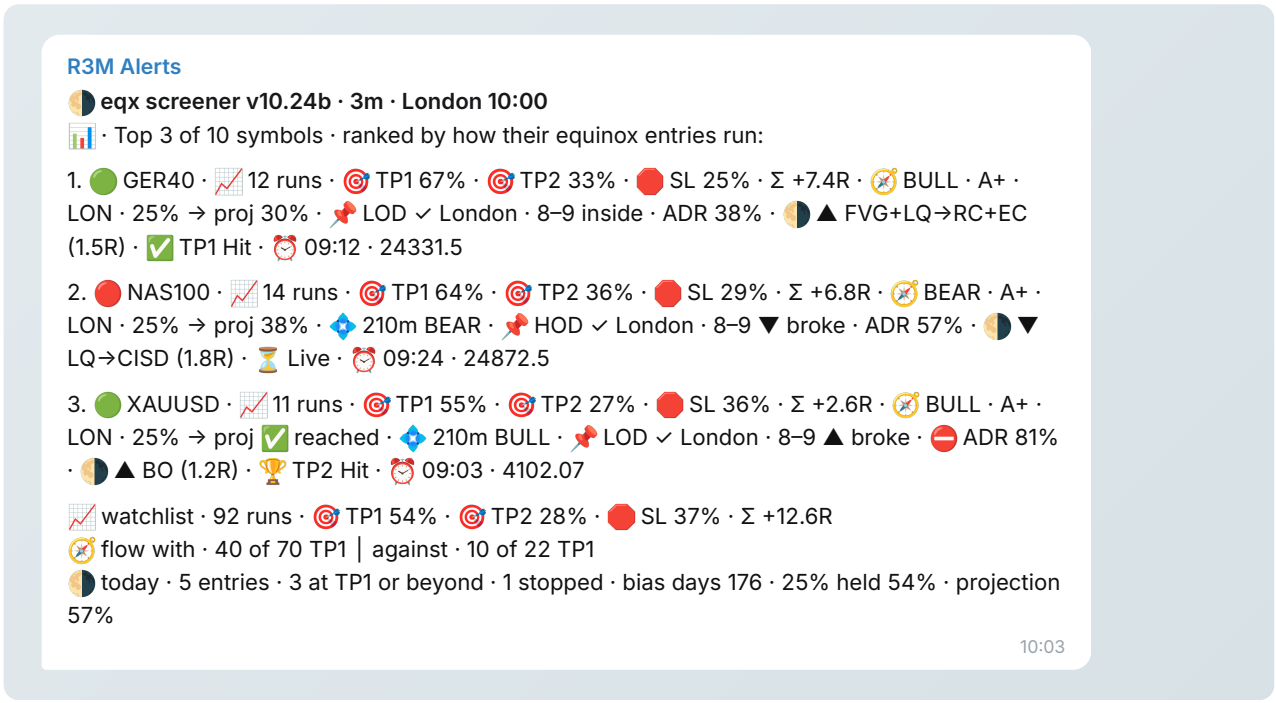

The status reads `⏳ Live`, `✅ TP1 Hit`, `🏆 TP2 Hit`, `🏁 Runner Closed` or `🛑 Stopped`; a symbol without an entry today reads `🌓 no entry today`, one below `↳ Min Runs` gets `· young` behind its record.

Reports fire only on real-time candles. If TradingView restarts an alert or you create it after the report time, the day's report is delivered at the next bar close — as long as that falls within two hours of the report time; later than that, the report is skipped for the day. The report day is the calendar day on the `Display Time Zone`, so it turns at 00:00 there, not at the symbol's session open.


Reading the footer

The three closing lines pool the whole watchlist, and because they go out with every report, your Telegram history becomes the record beyond the bars the chart has loaded.

- `📈 watchlist · 92 runs · …` — the record of all symbols together, as the record columns give it per symbol.
- `🧭 flow with · 40 of 70 TP1 | against · 10 of 22 TP1` — the entries with the day's flow and against it, as the `with` and `against` columns: how many reached TP1, of how many.
- `🌓 today · 5 entries · …` — today's entries across the watchlist and how they stand, then the bias record: bias days, the share on which the 25 % held, the share on which the projection was reached.

The new day's biases

With `🌅 New Day Bias · One List` (off by default) the screener sends, at each symbol's day turn, one message listing every symbol whose day began on that bar — its new bias and its 25 %, or `doji`. Symbols with different day starts arrive in separate messages; real-time candles only. The equinox charts only let their own new bias ride along (section 11) — this list is the reliable place for it:

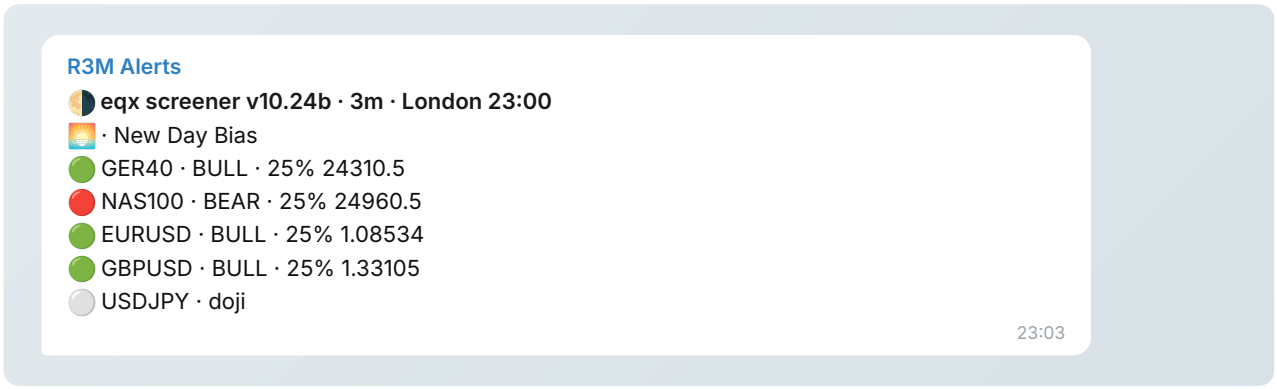

The report, the bias list and the heartbeat go out once per bar, even when TradingView runs a closing bar twice.

> **TIP** **Three rules for the alert**
>
> First: after every change to the script, delete the alert and create it again — a running alert computes with the state from the moment it was created. Second: to test the chain there are `Send A Test Report On The Next Bar Close` (one-off, 🧪) and `Heartbeat Every Bar Close (Diagnostics)` (one line per candle, `♥ alive · 10/10 symbols with data · bar 09:12`) — switch both off again after the test. Third: the Telegram chat ID comes pre-filled; put your own in before the first alert.

The script's first line carries `calc_bars_count = 10000` , and it stays there: a data request otherwise computes over its symbol's entire history, not only over the candles the chart has loaded — the record would then count more days than equinox. `History Bars` sets the same span for every slot's read. Bar Replay keeps far more in memory than the live chart: if the screener shows "Memory limits exceeded" there, lower `History Bars` to 3,000–5,000 for the replay and set it back afterwards.

SECTION 18

18 Glossary

The terms the guide uses without explaining them again — one line each.

Term	Meaning
A+ setup	A day whose 25 % level has never been broken on a closing basis.
ADR	Average Daily Range — the average daily range of the last 14 days.
Bias	The underlying direction of the day, taken from the previous-day candle.
BO	Breakout — entry on the first close through the 8–9 range.
C.E.	Consequent encroachment — the midpoint of a gap.
C2	Sweep-and-reclaim candle closing beyond its wick-weighted midpoint.
CISD	Change in State of Delivery — a close back through the open of the opposing run.
Climax	ϟ — Raschke's P3 bar: an oversized candle at a new day extreme that closes in its opposite half. While live, a veto on entries in its direction.
Day read	🧭 — the one-line situation on top of every message: direction and state, the framework on duty, the way to the projection, quarters, extreme, 8–9, ADR.
Driver	An alert event that sends on its own — frameworks against the bias, 210m quarters, entries — and carries the passengers with it.
EC / IRC / RC	The three reversal signatures, classified at the candle close against the previous candle.
F1 – F4	The four frameworks: which session manipulates, which expands.
Fate	🛑 / ✅ / 🏆 / 🏁 — the tracking of the latest entry: stopped, TP1 hit, TP2 hit, runner closed — each with its R.
First tap	☐ — the first touch of a live HTF FVG or opening gap, counted per gap and direction; in the messages the 👉 gauge of the day read counts them per 7h block (👉 `2↓ 0↑`).
FVG	Fair value gap — a three-candle gap.
Handover	The second reading taking over the decision session from its 08:00 until its 18:00; the ▸ in the status readout and the `◑ NY` below the bar show it, the 🔄 passenger in the alerts reports it.
HOD / LOD	High / low of day. With ✓ = an extreme confirmed by a 210m sweep-and-reclaim.
HTF FVG	A fair value gap on a higher timeframe, drawn as a box with the tag `1H +FVG` .
London / New York / Asia	The names of the two clocks (first and second session clock); that is what the readings are called in the status readout, on the marks and in the alerts.
LQ	Liquidity — the sweep of a swing point.
NDOG / NWOG	New day / new week opening gap — the gap between a close and the next open, tags `10/1 +NDOG` / `9/29 +NWOG` .

Term	Meaning
P1 – P4B	The four profiles for days without manipulation.
Passengers	◑ new bias, ◑◐ handover, ⊘ ADR, ϟ climax, ◌ liquidity, ▭ new gaps — in the message 🌅 🔄 ⛔ ⚡ ✂️ 🕳️ —, collected and appended to the 🧭 day read of the next driver.
PD	Previous day. PDH and PDL are its high and low.
Pro / contra	⚖️ — the facts under an entry's tooltip and alert: what else stood behind the trigger, marked (with) or (against). It does not filter.
PS	Protected swing — the swing the stop sits behind.
PWH/PWL, PMH/ PML	Previous week's and previous month's high and low, if not yet swept.
Record	In the screener: how a symbol's equinox entries ran over the loaded bars — runs, TP1, TP2, stop, Σ R, with and against the day's flow.
Runner	The second half of a trade after TP1: stop at the entry, target TP2, closed by a close back through the entry or at the day end (🏁).
Session clock	The clock the 18:00 / 01:00 / 08:00 grid sits on — London (Berlin hours), New York or Asia (Tokyo). It calculates, it does not label.
Session liquidity	The .H / .L lines at the high and low of every completed 7h block, extended until price takes them.
Setup	In the screener: a symbol's equinox entry of today — qualifier → trigger, with its time (since), its status and its TP1 in R.
SMT	Smart Money Technique — divergence between correlated assets.
TP1 / TP2	The first and second level on the liquidity ladder ahead of the entry, at least 1R from the entry and 1R apart (section 8).
210m	The model's confirmation resolution. One third of the 7h block.
7h	One session block: Asia, London or New York AM.

IMPORTANT **One last thing**

No indicator creates an edge. equinox does the counting for you and records what the market did, so you can concentrate on the decision. Trade it on paper or in a demo account until you can read the status readout without this guide open beside you.

SECTION 19

19 Ten sentences that replace the rest

Once you have read the guide and only want to look something up later — this is the short version.

1. **The 25 % is the pivot.** Everything else — frameworks, entries, targets — hangs on whether that one level holds.
2. **The day starts at 18:00, not at midnight.** And only a completed 210m candle between 18:00 and 08:00 may tip the bias.
3. **The levels are measured from the previous close.** On a bullish previous day the 25 % therefore sits below the open, not above it.
4. **At 08:00 the accounts are settled, in a fixed order.** Verify F1, re-read F2 and F3, profiles last. Manipulation beats a trend.
5. **Unconfirmed means unconfirmed.** The F4 preview can switch sides until 11:30. You do not trade it.
6. **An entry needs a run-up — and brings its pro / contra with it.** The event must come before the trigger, inside the same run, no older than 40 bars. Only the breakout does without a run-up. The pro / contra tells you what else stood behind it, TP1 and TP2 what it is worth — neither filters. After TP1 the rest runs with its stop at the entry.
7. **No entry is the normal case.** On many days a filter, the ADR guard or a live ϟ climax is holding the door, and that is the purpose of the chain — not a fault.
8. **The session clock calculates, it does not label.** Changing it moves the session grid and can produce a different framework.
9. **Two clocks run in one instance.** The second clock is always the next in the cycle London → New York → Asia and computes its own model; only its entries and its 8–9 range appear on the chart, kept apart by name and palette. With the handover it owns the afternoon — the ▸ in the status readout says who is on duty.
10. **The indicator counts, you decide.** equinox measures what the market did. What follows from it is not on the chart.

R 3 M

equinox·

Essence Model · Bias · 7h Profiles · Entries

R3M · equinox· and eqx·screener· for TradingView (Pine Script v6) · Edition October 2026

Concepts: Essence Model (rytrades), 7h daily profiles (AM Trades), session reads popularised by Hudson Trades, climax by Linda Raschke. This guide explains a tool; it is not financial advice.